

11-16-00

A



PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Docket No: 28299/34088E

CONTINUING APPLICATION TRANSMITTAL UNDER 37 CFR 1.53(b)

**Box Patent Application
Commissioner for Patents
Washington, D.C. 20231**



Sir:

This is a request under 37 CFR 1.53 for filing a

- ☐ continuation application.
☒ divisional application.

1. Particulars of Prior Application

Application Serial No: 09/058,547
Filed on: April 10, 1998
Title: Terminal For Libraries And The Like
Probable Art Unit: 2736
Probable Examiner: Jeffery A. Hofsass
Prior Docket No.: 28299/34088

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this Continuing Application Transmittal Under 37 CFR 1.53(b) and the documents referred to as enclosed therewith are being deposited with the United States Postal Service on **November 15, 2000**, in an envelope addressed to the Commissioner for Patents, Washington, D.C. 20231 utilizing the "Express Mail Post Office to Addressee" service of the United States Postal Service under Mailing Label No. EM099905322US.


Richard Zimmermann

2. This request is filed by:

1. Full Name of Inventor	Family Name Fergen	First Given Name James	Second Given Name E.
Residence & Citizenship	City North St. Paul	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

2. Full Name of Inventor	Family Name Nelson	First Given Name John	Second Given Name E.
Residence & Citizenship	City Woodbury	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

3. Full Name of Inventor	Family Name Kieffer	First Given Name Michael	Second Given Name J.
Residence & Citizenship	City Apple Valley	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

4. Full Name of Inventor	Family Name Yorkovich	First Given Name John	Second Given Name D.
Residence & Citizenship	City Maplewood	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

5. Full Name of Inventor	Family Name Marsolek	First Given Name Gerald	Second Given Name G.
Residence & Citizenship	City South St. Paul	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

6. Full Name of Inventor	Family Name Schwietz Jr.	First Given Name Joseph	Second Given Name E.
Residence & Citizenship	City Forest Lake	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

7. Full Name of Inventor	Family Name Grunes	First Given Name Mitchell	Second Given Name B.
Residence & Citizenship	City Minneapolis	State or Foreign Country Minnesota	Country of Citizenship U.S.A.
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/U.S.A.

8. Full Name of Inventor	Family Name McLeod	First Given Name Kathleen	Second Given Name M.
Residence & Citizenship	City London Ontario (N6C4Y3)	State or Foreign Country Canada	Country of Citizenship Canada
Post Office Address	Post Office Address P.O. Box 33427	City St. Paul	State & Zip Code/Country Minnesota 55133-3427/Canada

- ☒ This application is being filed by less than all the inventors named in the prior application. An accompanying statement requests deletion of the name(s) of the person(s) who are not inventors of the invention being claimed in this application.

3. Amendments

- ☒ Amend the specification by inserting before the first line the sentence:
--This is a **divisional** of U.S. application Serial No. 09/058,547 filed April 10, 1998.--
- ☒ Cancel claims 1-131 and 153-182 in the prior application before calculating the filing fee.
- ☐ A Preliminary Amendment is enclosed.
- ☒ The filing fee is based upon entry of the foregoing amendment(s) (if any).

4. Copy of Prior Application

The enclosed is a copy of the prior complete application, including the specification (with claims), drawings, the oath or declaration, and any amendments referred to in the oath or declaration filed to complete the prior application.

5. Incorporation By Reference

The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under paragraph 4, above, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. Priority

- ☐ Priority of application No. _____, filed on _____ in _____ is claimed under 35 USC 119.
 - ☐ The certified copy(ies) was(were) filed in prior U.S. application Serial No. _____.
 - ☐ The certified copy(ies) has(have) not been filed.

7. Assignment

- ☒ The prior application is assigned of record to Minnesota Mining and Manufacturing Company and has been recorded at Reel 9618, Frame 0474.

8. Small Entity Status

- ☐ Applicant claims small entity status. See 37 CFR 1.27.
 - ☐ A small entity statement is(are) attached.

9. Fee Calculation

CLAIMS AS FILED - INCLUDING PRELIMINARY AMENDMENT (IF ANY)						
			SMALL ENTITY		OTHER THAN A SMALL ENTITY	
	NO. FILED	NO. EXTRA	RATE	FEE	RATE	FEE
BASIC FEE				\$355.00		\$710.00
TOTAL	21 -20	= 1	X 9 =	\$0.00	X 18 =	\$18.00
INDEP.	1- 3	= 0	X 40 =	\$0.00	X 80 =	\$
<input type="checkbox"/> First Presentation of Multiple Dependent Claim			+ 135 =	\$0.00	+ 270 =	\$
Filing Fee:				\$0.00	OR	\$728.00

10. Method of Payment of Fees

- ☒ Attached is a check in the amount of: \$728.00
- ☐ Charge Deposit Account No. 13-2855 in the amount of: \$ _____
A copy of this Transmittal is enclosed.

11. Deposit Account and Refund Authorization

The Commissioner is hereby authorized to charge any deficiency in the amount enclosed or any additional fees which may be required during the pendency of this application under 37 CFR 1.16 or 37 CFR 1.17 to Deposit Account No. 13-2855. A copy of this Transmittal is enclosed.

Please refund any overpayment to Marshall, O'Toole, Gerstein, Murray & Borun at the address below.


12. Correspondence Address

Customer No.: 04743

Respectfully submitted,

MARSHALL, O'TOOLE, GERSTEIN,
MURRAY & BORUN
6300 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606-6402
(312) 474-6300
(312) 474-0448 (Telefacsimile)

By:

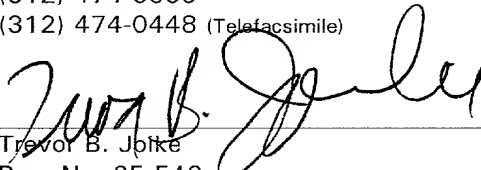
Trevor B. Jolke
Reg. No: 25,542

November 15, 2000

TERMINAL FOR LIBRARIES AND THE LIKE

Technical Field of the Invention

5 The present invention relates to a library terminal which may be used, for example, by borrowers to check circulating items out of, and/or to return circulating items to, a library.

Background of the Invention

10 Many businesses and other enterprises are increasingly automating their systems in order to reduce operating cost and improve service. When such systems are used by the customers of these businesses and other enterprises, automation typically involves self-service facilities which allow customers to satisfy their own requirements. For example, financial institutions and library systems are beginning to
15 use self-service terminals in order to reduce costs and to improve service. In the case of libraries, the libraries' patrons may use these self-service library terminals to conduct at least some of their business with the libraries.

20 Known self-service library terminals typically include a cradle on which circulating items to be checked

out from, or returned to, a library can be placed. A scanner reads a code, such as a bar code, which has been placed on the circulating item by library staff and which identifies the circulating item. Typically the scanner projects a visible scan line in order to read the code. The visible scan line used by current scanners do little more than read codes, and are not arranged to provide information back to library patrons. Accordingly, known self-service library terminals are under-utilized.

Known self-service library terminals also do not lead a user through a loan transaction and do not provide feedback to the user regarding the proper use of the self-service library terminal. For example, known self-service library terminals do not indicate to the user when a circulating item has been placed in an improper position on the cradle.

Moreover, when known self-service library terminals are configured according to the specifications of a particular library, the configuration data is not conveniently generated and distributed to each of the self-service library terminals provided by a library. Accordingly, unnecessary expense and time consuming labor are required to configure the self-service library terminals of a library.

5 In addition, known self-service library terminals typically rely on only one circulating item receiving area, such as a cradle, in order to receive circulating items whose codes are to be scanned by the scanner during check out and/or check in. This limitation means that either current self-service library terminals are limited in the types of circulating items which can be checked out and/or checked in by the patron without the help of a member of the library staff, or library staff must be careful about the placement of codes on the circulating items and patrons must be careful about the placement of the different kinds of circulating items on the cradle so that their codes may be properly scanned.

10 Furthermore, known library self-service terminals have many other limitations. For example, (i) known self-service library terminals do not process financial credit transactions, (ii) they do not store loan transaction information during periods when the communication link between the terminal and the main circulation system of the library is down so that this loan transaction information can be later transferred to the main circulation system when the communication link is back up, (iii) they do not determine incorrect placement of a patron's library card on the cradle so that the identification of the patron processing a check

15

20

out or check in transaction can be determined, and (iv) they do not permit a library patron to continue a transaction at the option of the patron if the self-service library terminal is in an error state.

5 The present invention is directed to a library terminal that solves one or more of the above noted problems.

Summary of the Invention

10 In accordance with one aspect of the present invention, a library terminal comprises an article receiving area arranged to receive an article, a code reader arranged to read a code on the article when placed on the article receiving area, and a controller coupled to the code reader. The controller is arranged to control the code reader so as
15 to project a visible indicator onto the article receiving area and so as to change the visible indicator between first and second visible states, and the controller is arranged to process a signal from the code reader corresponding to the code read by the code.

20 In accordance with another aspect of the present invention, a library terminal comprises a display, a transducer, a code reader arranged to read a code on an article involved in a loan transaction, and a controller coupled to

the display, the transducer, and the code reader. The controller is arranged to control the code reader so to as read the code on the article, the controller is arranged to control the display so as to lead a user through the loan transaction, and the controller is arranged to control the transducer so as to provide an audible feedback having first and second on-states depending upon operation of the library terminal by the user.

In accordance with still another aspect of the present invention, a self-service library terminal comprises an article receiving area arranged to receive an article, a code reader arranged to read a code on the article when the article is placed on the article receiving area, and a controller coupled to the code reader. The controller is arranged to process signals from the code reader and to provide an explicit feedback to a borrower when an article has an improper position on the article receiving area.

In accordance with an additional aspect of the present invention, a method of the present invention is provided for the preparation of configuration data for multiple self-service library terminals. According to the method, the configuration data is stored in data storage memories of the multiple self-service library terminals. The multiple self-service library terminals are configured

by the configuration data to interact with users during loan transactions. The method comprises the following steps: a) preparing the configuration data on an administration terminal; and b) transferring the configuration data from the administration terminal to the data storage memories of the multiple self-service library terminals.

In accordance with yet another aspect of the present invention, a library terminal comprises a monitor, a data storage memory storing screen displays, and a controller. The screen displays include fonts. The controller is arranged to control the display of the screen displays, including the fonts, on the monitor without performing font rendering from fonts stored separately from the screen displays.

In accordance with a further aspect of the present invention, a library terminal comprises a housing, an item receiving area incorporated in the housing, a video receiving area incorporated in the housing, a reader supported by the housing and arranged to read the circulating item and the video when the circulating item is placed in the item receiving area and when the video is placed in the video receiving area, and a controller. The item receiving area is arranged to receive a circulating item. The video receiver area is arranged to receive a video. The controller

is contained with the housing, and the controller is coupled to the reader.

5 In accordance with still a further aspect of the present invention, a self-service library terminal comprises a reader and a controller. The reader is arranged to read identifications on articles involved in library loan transactions. The controller is arranged to process signals from the reader corresponding to the identifications read by the reader, and the controller is arranged to process financial credit transactions related to the library loan transactions and to remind a borrower of the borrower's account status.

10 In accordance with yet a further aspect of the present invention, an arrangement comprises a self-service library terminal, a circulation system, and a communication link. The communication link couples the self-service library terminal to the circulation system. The self-service library terminal has a controller arranged to process a loan transaction of a borrower of a circulating item. The controller stores the loan transaction during a period when the communication link between the self-service library terminal and the circulation system is down, and the controller transfers the stored loan transaction from the self-service library terminal to the circulation system during a period when the communication link between the

15

20

self-service library terminal and the circulation system is not down.

5 In accordance with an additional aspect of the present invention, a library terminal comprises a card receiving area arranged to receive a library card, a card reader arranged to read the library card when the library card is placed on the card receiving area, and a controller coupled to the card reader. The controller is responsive to the card reader in order to determine incorrect library card placement on the card receiving area.

10 In accordance with a further additional aspect of the present invention, a library terminal comprises a circulating item receiving area arranged to receive a circulating item, a scanner arranged to scan the circulating item when the circulating item is placed on the circulating item receiving area, and a controller coupled to the scanner. The controller is responsive to the scanner in order to determine when the circulating item is in the circulating item receiving area but is not in a reference position.

15 20 In accordance with still a further additional aspect of the present invention, a library terminal comprises a first circulating item receiving area arranged to receive a first circulating item of a first type, a first scanner arranged to read the first circulating item when the

first circulating item is placed in the first circulating item receiving area, a second circulating item receiving area arranged to receive a second circulating item of a second type, a second scanner arranged to read the second circulating item when the second circulating item is placed in the second circulating item receiving area, and a controller coupled to the first and second scanners. The first and second types are different. The controller is responsive to the first scanner in order to determine when the second circulating item is placed on the first circulating item receiving area.

In accordance with yet a further additional aspect of the present invention, a self-service library terminal comprises a controller and a display. The controller is arranged to detect an error state of the self-service library terminal and, while the self-service library terminal is in the error state, to notify a user through use of the display that the user may continue a transaction at the option of the user.

Brief Description of the Drawings

These and other features and advantages of the present invention will become more apparent from a detailed consideration of the invention when taken in conjunction with the drawings in which:

Figure 1 illustrates a self-service library terminal according to the present invention;

Figure 2 illustrates a library system in which a plurality of library terminals are interconnected;

Figure 3 illustrates an exemplary set of internal components for the self-service library terminal illustrated in Figure 1;

Figure 4 illustrates a start up routine performed by the self-service library terminal illustrated in Figure 1 where the self-service library terminal is arranged to process only checkouts;

Figure 5 illustrates an alternative start up routine which may be performed by the self-service library terminal illustrated in Figure 1 when the terminal has multiple language capability and when the terminal is used for both checkout and checkin;

Figures 6-14 illustrate a patron identification routine performed by the self-service library terminal illustrated in Figure 1;

Figures 15-20 illustrate a circulating item check-out routine performed by the self-service library terminal illustrated in Figure 1;

5 Figure 21 illustrates a session termination routine performed by the self-service library terminal illustrated in Figure 1;

Figures 22 and 23 illustrates a patron walk-away routine performed by the self-service library terminal illustrated in Figure 1;

10 Figure 24 illustrates a start up routine performed by the self-service library terminal illustrated in Figure 1 where the self-service library terminal is arranged to process only checkins;

15 Figures 25-27 illustrate a circulating item check in routine performed by the self-service library terminal illustrated in Figure 1;

Figure 28 illustrates an out-of-service routine performed by the self-service library terminal illustrated in Figure 1;

20 Figure 29 illustrates a post identification processing routine performed by the self-service library terminal illustrated in Figure 1; and,

Figure 30 illustrates an arrangement for configuring the self-service library terminal illustrated in Figure 1.

Detailed Description

5 A self-service library terminal 10 is illustrated in Figure 1. The self-service library terminal 10 has a housing 12 forming a cradle 14, which also may be referred to as a first circulating item receiving area. The cradle 14 is arranged to receive a circulating item such as a book, a magazine, a CD, and/or the like, and has an idle indicator 16. The idle indicator 16, for example, may be a bar code, may be referred to herein as a default bar code, and may be provided in a card holder of the cradle 14. This card holder may be used by the library patron to hold the patron's library card when the patron is entering the patron's ID at the beginning of a loan transaction. A reader 18 is supported on the housing 12 and is arranged to read item identifiers or codes, such as bar codes, on the circulating items and library cards placed on the cradle 14. For example, the reader 18 may be a scanner such as a bar code scanner. The reader 18 also reads the idle indicator 16 in order to determine, for example, when a library card or a circulating item is or is not on the cradle 14. The reader

18 may additionally be arranged to read other features, such as dimensions, of a library card and/or a circulating item.

Photoelectric sensors 20 and 22 are suitably affixed to the cradle 14 and are used to sense circulating items on the cradle 14. For example, when the reader 18 reads the idle indicator 16 on the cradle 14, and neither of the photoelectric sensors 20 and 22 is covered, the self-service library terminal 10 determines that a circulating item is not placed on the cradle 14. On the other hand, if the reader 18 reads the idle indicator 16 and one of the photoelectric sensors 20 and 22 is covered, or if the reader 18 does not read the idle indicator 16 and one or both of the photoelectric sensors 20 and 22 are covered, the self-service library terminal 10 determines that a circulating item is placed on the cradle 14 but is not in the proper position. Thus, a circulating item is in the proper position when its identifier on the circulating item is read by the reader 18 and both of the photoelectric sensors 22 and 20 are covered.

As is also known, a security marker may be provided in or on a circulating item. This security marker typically is a magnetic strip which is placed in the spine and/or along an edge of a circulating item. The security marker can be desensitized when a circulating item is prop-

erly checked out by a library patron so that exit scanners will not provide an alarm as the patron passes out of an exit of the library. On the other hand, if the security marker is not desensitized before the circulating item passes through the exit scanners, an alarm will be given to alert the library staff. During check in, the security marker of a circulating item is re-sensitized so that, if the circulating item is not properly checked out before an attempt is made to remove the circulating item from the library, an alarm will be given. Accordingly, the self-service library terminal 10 can include a sensitizer/desensitizer 24 which is provided in a back wall 26 of the housing 12 and which interacts with the security marker. For example, the security marker may be a magnetic security marker, and the sensitizer/desensitizer 24 may be arranged to magnetize or de-magnetize the magnetic security marker. The sensitizer/desensitizer 24 also may be arranged to read the magnetic state of the security marker during multiple book detection and/or to determine the appropriate sensitizing/desensitizing range of the sensitizer/desensitizer 24.

In order for the sensitizer/desensitizer 24 to operate properly, the portion of the circulating item having the security marker must be against the back wall 26 of the

5 cradle 14. The item identifier which uniquely identifies a
circulating item is placed by the library staff on the
circulating item so that, when the reader 18 reads the item
identifier on the circulating item, and when the photoelec-
10 tric sensors 20 and 22 are covered, the portion of the
circulating item having the security marker must be against
the sensitizer/desensitizer 24. Thus, when the reader 18
fails to read either the item identifier of a circulating
item or the idle indicator 16, and when the photoelectric
15 sensors 20 and 22 are covered, then either the circulating
item has been placed on the cradle 14 so that the portion of
the circulating item having the security marker is not
against the sensitizer/desensitizer 24, or the circulating
item must be slid sufficiently along the back wall 26 to
enable the reader 18 to read the item identifier on the
circulating item.

20 In the case where the reader 18 is a scanner such
as a bar code scanner, the visible scan line projected by
the reader 18 may be used to indicate proper placement of
the circulating item on the cradle 14 so that the identifier
on the circulating item may be read. Thus, this scan line
helps guide the patron in properly positioning the circulat-
ing item on the cradle 14. Also, the self-service library
terminal 10 has a display 28 which is used to provide in-

structions to the patron regarding proper placement of a circulating item on the cradle 14 in response to feedback from the reader 18 and the photoelectric sensors 20 and 22. Also, the display 28 may be used to provide other information to the patron.

The self-service library terminal 10 may also be provided with a video slot 30, which may also be referred to as a second circulating item receiving area. The video slot 30 may be used to receive such circulating items as videos and the like. The self-service library terminal 10 further has a keypad 32, a magnetic stripe reader 34, a printer (not shown in Figure 1), a printer slot 36, a proximity sensor 38, and an audible transducer 40. The keypad 32 may be used by a patron to enter appropriate data. The magnetic stripe reader 34 may be used, for example, to read a magnetic stripe on a patron's library card, debit card, credit card, or the like. The patron may present the magnetic stripe of a library card to the magnetic stripe reader 34 so that the patron processing a transaction at the self-service library terminal 10 may be identified. The magnetic stripe reader 34 may also be used to read a magnetic stripe on a patron's debit card or credit card in order to process a financial transaction involving the patron. The printer may be used to issue printed matter through the printer slot 36. For

example, the printer may be used to print various items such as system diagnostics, receipts based on financial transactions conducted by library patrons, or receipts for circulating items being checked out indicating the date by which the circulating items should be checked in. The proximity sensor 38 may be used to detect when a library patron has approached the self-service library terminal 10, and the audible transducer 40 may be used to provide audible feedback to the patron. The housing 12 may also be provided with a cash slot 42 that may be used to receive and dispense cash involved in financial transactions. As shown in Figure 1, the cash slot 42 is a separate box which is in communication with the self-service library 10 terminal by way of a connection in the rear of the housing 12. Alternatively, the cash slot 42 may be formed integrally with the self-service library 10.

As shown in Figure 2, a circulation system 48 of a library typically has multiple terminals some or all of which may be self-service library terminals such as the self-service library terminal 10 shown in Figure 1. Accordingly, the circulation system 48 includes a data server 50 and a plurality of library terminals 52, 54, 56, 58, . . . n which, as shown in Figure 2, are interconnected in a star

configuration. However, it should be understood that the data server 50 and the library terminals 52, 54, 56, 58, . . . n may be instead interconnected in any network configuration. The data server 50 is at the hub of the star and, for example, may include the functions of a main circulation terminal and/or an administration terminal which are used by library staff in order to administer the circulating system 48 in which the library terminals 52, 54, 56, 58, . . . n are used. Indeed, for the discussion below, it is assumed that the data server 50 performs the function of an administration terminal. However, it should be understood that a separate administration terminal may be used.

Alternatively, the data server 50 may be a gateway permitting the other library terminals shown in Figure 2 to communicate with one another. The other library terminals 52, 54, 56, 58, . . . n may be self-service library terminals such as the self-service library terminal 10 shown in Figure 1.

Configuration data may be generated by use of one of the library terminals shown in Figure 2. If the data server 50 performs the functions of an administration terminal, the configuration data can be generated there. On the other hand, if the data server 50 is also a gateway, one of the library terminals 52, 54, 56, 58, . . . n shown in

Figure 2 functioning as an administration terminal may be used in order to generate the configuration data. Alternatively, any of the library terminals 52, 54, 56, 58, . . . n may be used to generate the configuration data. As a still further alternative, all of the library terminals 52, 54, 56, 58, . . . n shown in Figure 2 may be self-service library terminals.

The configuration data includes, for example, screen display formats. These screen display formats are used to generate screen displays in one or more languages which are then presented to the user on the display 28 shown in Figure 1 depending upon the nature of the information to be conveyed to the user or depending upon the information which is to be elicited from the patron. The configuration data may also include receipt formats and message responses. Accordingly, the configuration data is generated using the designated library terminal and is then downloaded to the other library terminals of the circulation system 48.

The components housed by the housing 12 of the self-service library terminal 10 are illustrated in Figure 3. As shown in Figure 3, the self-service library terminal 10 includes a microprocessor 60 and a memory 62 associated therewith. The memory 62 may include, for example, a RAM 64 and a ROM 66. The microprocessor 60 also has I/O ports 68

in order to receive information from, and to provide information to, various devices. For example, the microprocessor 60 receives information from the reader 18, the photoelectric sensors 20 and 22, the keypad 32, the magnetic stripe reader 34, and the proximity sensor 38. The information from these devices is read by the microprocessor 60 through the I/O ports 68.

The microprocessor 60 also provides information to the display 28, the audible transducer 40, and the printer 70 through the I/O ports 68. Accordingly, the microprocessor 60, for example, provides screen displays and other information for display by the display 28, feedback and other information for transmission by the audible transducer 40, and information to be printed by the printer 70. A communication link 72 is provided so that the microprocessor 60 can transmit and receive information to and from other self-service library terminals and/or the data server 50. For example, the microprocessor 60 may be arranged to determine whether the communication link 72 is down at any time that it needs to communicate with the data server 50 over the communication link 72. During periods when the communication link 72 is down, the microprocessor 60 stores in the memory 62 any loan transaction information that it is required to communicate to the data server 50 so that this

loan transaction information can be later transferred to the data server 50 when the communication link 72 is back up. A reader 74, which may be similar to the reader 18 and which is housed in the housing 12, is provided for reading item identifiers on videos that are inserted by the library patron into the video slot 30.

The microprocessor 60 executes a program represented by the flow charts shown in Figures 4-29. The flow chart shown in Figure 4 governs start-up of the self-service library terminal 10 when the self-service library terminal 10 is used only for checkout of circulating items. At start-up, if the staff of the library in which the self-service library terminal 10 is used determines that the self-service library terminal 10 is not to be used during a particular time period, then the microprocessor 60 at a block 102 retrieves an out-of-service screen display SCR-28 from the memory 62 and displays that out-of-service screen display on the display 28. On the other hand, if the microprocessor 60 detects an error at start up, then the microprocessor 60 as indicated by a block 104 retrieves an error condition out-of-service screen display SCR-82 from the memory 62 and displays this error condition out-of-service screen display on the display 28. As indicated in Figure 4, the self-service library terminal 10 may be arranged to

allow the patron to continue under certain error conditions.
The self-serve library terminal 10 may be arranged so that
whether the patron is allowed to continue under certain
error conditions is an option that the library staff can
enable.

However, assuming that the staff of the library
has not determined that the self-service library terminal 10
is not to be used during a particular time period, and
assuming that the microprocessor 60 does not detect an error
at start up, or if the patron is allowed to continue even
though there is an error, the microprocessor 60 at a block
106 retrieves a welcome screen SCR-1 from the memory 62 and
supplies the welcome screen to the display 28.

The screen displays described herein may be stored
as bit maps in the memory 62 and may be accessed from the
memory 62 when needed.

This welcome screen SCR-1 may provide certain
library specific information as designated by the staff of
the library in which the self-service library terminal 10 is
used. For example, the welcome screen may direct the patron
to first enter the patron's identification by placing the
patron's library card in the cradle 14 or by swiping the
magnetic stripe on the patron's library card through the
magnetic stripe reader 34 or by using the keypad 32. Alter-

natively, a screen saver initial screen may be presented on the display 28 to the patron directing the patron to press any key, upon which the welcome screen SCR-1 is presented to the patron. As a still further alternative, the welcome
5 screen SCR-1 is not presented on the display 28 until a sensor, such as the proximity sensor 38, detects the presence of a patron at the self-service library terminal 10. As a yet further alternative, or in addition to any of the alternatives described above, the scan line projected by the
10 reader 18 is changed from a first state to a second state when a sensor, such as the proximity sensor 38, detects the presence of a patron at the self-service library terminal 10. For example, the first state may be off and the second state may be on, or the first state may be steady and the
15 second state may be blinking, or the first state may be blinking and the second state may be steady, or the first state may be long and the second state may be short, or the first state may be short and the second state may be long, or the like.

20 The microprocessor 60 remains in the block 106 state until it detects that the patron (i) has placed the patron's library card in the cradle 14, or has presented the magnetic stripe on the patron's library card to the magnetic stripe reader 34, or has entered the patron's identification

through use of the keypad 32, or (ii) has pressed an identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the reader 18, the magnetic stripe reader 34, or the keypad 32, or (iii) has tripped a media sensor such as covering one or more of the photoelectric sensors 20 and 22 or covering the idle indicator 16. If the patron has placed the patron's library card in the cradle 14, program flow proceeds to point B of Figure 6. If the patron has entered the patron's identification through use of the keypad 32, program flow proceeds to point B of Figure 10. If the patron has presented the magnetic stripe on the patron's library card to the magnetic stripe reader 34, program flow proceeds to point B of Figure 8.

On the other hand, if the patron has pressed an identification entry key on the keypad 32, program flow proceeds to a point 108 in Figure 4. Thus, if the patron has pressed a bar code identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the reader 18, program flow proceeds to point A of Figure 6. If the patron has pressed a keypad identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the keypad 32, program flow

proceeds to point A of Figure 10. If the patron has pressed a magnetic stripe identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the magnetic stripe reader 34, program flow proceeds to point A of Figure 8.

If the patron has tripped a media sensor (such as by placing a circulating item on the cradle 14 to cover at least one of the photoelectric sensors 20 and 22), then the microprocessor 60 at a block 110 provides a sad tone (indicated by the sad face) through the audible transducer 40 and causes a screen display SCR-2 to be displayed to the library patron in which the library patron is requested to press one of the identification entry keys on the keypad 32 in order to begin a transaction or to clear the media sensor. If the patron presses one of the identification entry keys, program flow proceeds to point 108 of Figure 4. If the library patron clears the sensor without pressing a key or taking some other action indicating the beginning of a transaction, program flow returns to the block 106. If the library patron takes no action at the block 110 for a predetermined amount of time as determined by a maximum event timer T1, program flow returns to the block 106.

In the case where a library patron is allowed to choose a language in order to execute a check in and/or

check out transaction using the self-service library terminal 10, the flow chart shown in Figure 5 instead of the flow chart shown in Figure 4 governs start-up of the self-service library terminal 10. As shown in Figure 5, at start-up, if the staff of the library in which the self-service library terminal 10 is used determines that the self-service library terminal 10 is not to be used during a particular time period, then the microprocessor 60 at a block 120 retrieves the out-of-service screen display SCR-28 from the memory 62 and displays that out-of-service screen display on the display 28. On the other hand, if the microprocessor 60 detects an error at start up, then the microprocessor 60 as indicated by a block 122 retrieves the error condition out-of-service screen display SCR-82 from the memory 62 and displays this error condition out-of-service screen display on the display 28. (The screen displays SCR-28 and SCR-82 may provide the same out-of-service information in multiple languages.) As indicated in Figure 4, the self-service library terminal 10 may be arranged to allow the patron to continue under certain error conditions.

However, assuming that the staff of the library has not determined that the self-service library terminal 10 is not to be used during a particular time period, and assuming that the microprocessor 60 does not detect an error

at start up, or if the patron is allowed to continue even though there is an error, the microprocessor 60 at a block 124 retrieves a welcome screen from the memory 62 and supplies the welcome screen SCR-3 to the display 28.

5 This welcome screen SCR-3 may be in multiple languages, may instruct the patron to choose one of the multiple languages such that all subsequent screen displays will be in the chosen language, and may provide certain library specific information as designated by the staff of the library in which the self-service library terminal 10 is used. For example, the welcome screen SCR-3 may direct the patron to press an identification entry key. Alternatively, a screen saver initial screen may be presented on the display 28 directing the patron to press any key, upon which
10 the welcome screen SCR-3 is presented to the patron. As a still further alternative, the welcome screen SCR-3 is not presented on the display 28 until a sensor, such as the proximity sensor 38, detects the presence of a patron at the self-service library terminal 10.

15 The microprocessor 60 remains in the block 124 state until it detects that the patron has pressed an identification entry key or a checkin indicating key of the keypad 32 (indicated in Figure 5 as "correct key"), or has tripped a media sensor such as covering one or more of the

photoelectric sensors 20 and 22 or covering the idle indicator 16. Pressing an identification entry key indicates that the patron wishes to enter the patron's identification through use of the reader 18, the magnetic stripe reader 34, or the keypad 32. If the patron has pressed an identification entry key or a checkin indicating key on the keypad 32, program flow proceeds to a point 126 in Figure 5.

Thus, if the patron has pressed a bar code identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the reader 18, program flow proceeds to point A of Figure 6. If the patron has pressed a keypad identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the keypad 32, program flow proceeds to point A of Figure 10. If the patron has pressed a magnetic stripe identification entry key of the keypad 32 indicating that the patron wishes to enter the patron's identification through use of the magnetic stripe reader 34, program flow proceeds to point A of Figure 8. If the patron has pressed the checkin indicating key, a screen display SCR-80 directing the patron to place a circulating item on the cradle or in the video slot 30 is provided on the display 28, and program flow proceeds to point A of Figure 25.

5 If the patron has tripped a media sensor or has
pressed the wrong key on the keypad 32, then the micropro-
cessor 60 at a block 128 provides a sad tone through the
audible transducer 40 and causes a screen display SCR-4 to
be displayed to the library patron. The screen display SCR-
4 again instructs the patron to choose one of the multiple
languages such that all subsequent screen displays will be
in the chosen language. The screen display SCR-4 also
requests the library patron to press a correct key on the
10 keypad 32 in order to begin a transaction or to clear the
media sensor. If the patron presses a correct key, program
flow proceeds to the point 126 of Figure 5. If the library
patron clears the sensor without pressing a key or taking
some other action indicating the beginning of a transaction,
15 program flow returns to the block 124. If the library
patron takes no action at the block 128 for a predetermined
amount of time as determined by a maximum event timer T2,
program flow returns to the block 124.

20 As described above, when a user begins a transac-
tion at the self-service library terminal 10, the library
patron must first be identified. Figures 6-14 illustrate
the patron identification routine performed by the self-
service library terminal 10. When the flow chart of Figure
6 is entered through point A, the microprocessor 60 at a

block 199 initializes all counters and at a block 200 causes a screen display SCR-5 to be displayed to the patron. This screen display indicates that the self-service library terminal 10 is ready for the library patron to place the patron's library card in the proper position on the cradle 14. On the other hand, when the flow chart of Figure 6 is entered through point B, processing at the block 200 is bypassed because the patron's library card is already in the proper position on the cradle 14.

After the screen display SCR-5 is presented to the patron at the block 5, or if the flow chart of Figure 6 is entered through point B, the microprocessor 60 at a point 201 determines which action is appropriate. If a circulating item instead of a library card has been first placed on the cradle 14 as determined by the particular identifier read by the reader 18 and/or the photoelectric sensors 20 and 22, and if an item-on-cradle counter R9 has a count not exceeding a predetermined threshold (hereinafter referred to as a predetermined R9 threshold), a screen display SCR-10 at a block 202 is presented to the library patron instructing the library patron to remove the circulating item from the cradle 14 and to instead place the patron's library card on the cradle 14. Also, the microprocessor 60 provides a sad tone through the audible transducer 40. The item-on-cradle

counter R-9 is then incremented at a block 204, and program flow returns to the point 201 in order to determine the next appropriate action. If the count of the item-on-cradle counter R9 has exceeded the predetermined R9 threshold, however, then the microprocessor 60 at a block 206 provides a screen display SCR-9 to the library patron instructing the library patron to remove the item from the cradle 14 and indicating to the library patron that the library patron has exceeded the number of allowable attempts to put a library card on the cradle 14. Also, the microprocessor 60 provides a sad tone through the audible transducer 40 indicating improper operation. If the patron removes the item, program flow then returns through point C of Figure 6 to the welcome screen. If the patron does not remove the item before a walkaway-item-removed timer T6 times out, program flow proceeds to the walkaway routine of Figure 22.

If the action determined by the microprocessor 60 at the point 201 is that a bar code other than the idle indicator 16 is read by the reader 18, the scan line projected by the reader 18 is provided as a short solid (SS) scan line and, as indicated at a block 212, the bar code read by the reader 18 is converted into a format processable by the microprocessor 60. Thereafter, the microprocessor 60 determines whether the library patron identified by the bar

code on the library card read by the reader 18 has previously been determined to be a blocked patron (i.e., a library patron who is not permitted to use library services through the self-service library terminal 10), and the
5 microprocessor 60 also determines whether the time accumulated by a blocked patron timer T7 has exceeded a predetermined T7 threshold. If the current library patron is a blocked patron and the time accumulated by the blocked patron timer T7 has not reached the predetermined T7 threshold,
10 the microprocessor 60 at a block 214 provides the patron with a screen display SCR-12 indicating that the patron has a bad library card and instructing the patron to remove the library card. Also, a sad tone is provided to the library patron. If the patron removes the library card before the walkaway-item-removed timer T6 times out, program
15 flow returns to the welcome screen. However, if the walkaway-item-removed timer T6 times out before the patron removes the library card, program flow proceeds to the walkaway routine of Figure 22.

20 If either the current library patron is not a blocked library patron, or the time accumulated by the blocked patron timer T7 has exceeded the predetermined T7 threshold, the microprocessor 60 determines whether the library patron identified by the library card has a person-

nel identification number (PIN). If the patron does not
have a PIN, program flow proceeds to point A of Figure 7.
If the patron has a PIN, the microprocessor 60 executes the
program represented by the program flow shown in Figure 12
which returns PIN ENTERED, NO PIN ENTERED, or CARD REMOVED.
If PIN ENTERED is returned, program flow proceeds to point A
of Figure 7. If CARD REMOVED is returned, then the micro-
processor 60 at a block 218 provides a screen display SCR-11
informing the patron that the patron's library card has been
removed. Also, a sad tone is provided to the library pa-
tron. Program flow then returns to point 201. If NO PIN
ENTERED is returned, then the microprocessor 60 at a block
220 provides a screen display SCR-81 informing the patron
that the patron did not enter a PIN and directing the li-
brary patron to remove the patron's library card. Also, a
sad tone is provided to the library patron. If the patron
removes the library card before the walkaway-item-removed
timer T6 times out, program flow returns to the welcome
screen. However, if the walkaway-item-removed timer T6
times out before the patron removes the library card, pro-
gram flow proceeds to the walkaway routine of Figure 22.

If the microprocessor 60 determines that the
action is that the idle indicator 16 is not read by the
reader 18 (indicating, for example, that there is an object

on the cradle 14 but that a bar code is not being read from the object) and a maximum event timer T4 has accumulated a predetermined amount of time, the microprocessor 60 determines whether a bad-read counter R2 has a count greater than a predetermined R2 threshold. The maximum event time T4 times out if the patron places something on the cradle 14 so as to cover the idle indicator 16 but thereafter takes no action for the time allowed by the maximum event timer T4. If the bad-read counter R2 does not have a count greater than the predetermined R2 threshold, the microprocessor 60 at a block 222 causes a screen display SCR-7 to be displayed to the library patron requesting the patron to place the patron's library card on the cradle 14. Also, a sad tone is provided to the library patron. The bad-read counter R2 is incremented at a block 224, and program flow returns to the point 201.

On the other hand, if the bad-read counter R2 has a count greater than the predetermined R2 threshold, the microprocessor 60 at a block 226 causes a screen display SCR-8 to be displayed to the library patron indicating that the patron's library card is unreadable and to remove the item. Thereafter, program flow returns to the welcome screen if the walkaway-item-removed timer T6 does not time out before the item is removed from the cradle 14. However,

if the walkaway-item-removed timer T6 times out before the item is removed from the cradle 14, program flow proceeds to the walkaway routine of Figure 22.

5 If the microprocessor 60 is at the point 201, and
if a maximum event timer T3 has timed out before (i) an item
is placed on the cradle 14 or an item identifier is read
from a video in the video slot 30, (ii) an identifier on a
library card is read by the reader 18 when a library card is
in the card holder described above, and (iii) the idle
10 indicator 16 is not read by the reader 18 and the maximum
timer T4 times out, the microprocessor 60 determines whether
a please counter R1 has a count that exceeds a predetermined
R1 threshold. If the count of the please counter R1 has
exceeded the predetermined R1 threshold, program flow re-
15 turns to the welcome screen. However, if the count of the
please counter R1 has not exceeded the predetermined R1
threshold, the microprocessor 60 at a block 228 provides a
screen display SCR-6 requesting the patron to please place
the library patron's library card on the cradle 14 in the
20 correct position. The please counter R1 is incremented at a
block 230, and program flow returns to the point 201.

When the flow chart of Figure 7 is entered through
point A, the microprocessor 60 at a block 300 provides a
screen display SCR-18 indicating that the library patron's

identification is being checked. At a block 302, the self-service library terminal 10 transmits a patron status request over the communication link 72 to the data server 50. If the status returned by the data server 50 to the self-service library terminal 10 indicates that the status of the library patron is acceptable, the microprocessor 60 determines at a point 304 whether the library card is still on the cradle 14 by sampling the output of the reader 18. If the library card is not still on the library cradle 14, the scan line provided by the reader 18 is changed by the microprocessor 62 to a short flashing scan line SF, the microprocessor 60 at a block 306 provides a screen display SCR-11 indicating to the library patron that the patron's library card has been improperly moved, and program flow proceeds to point B of Figure 6. However, if the microprocessor 60 determines that the library card of the library patron is still on the cradle 14 in the proper position, the microprocessor 60 determines whether the library card carries a magnetic stripe. For example, the microprocessor 60 may access the memory 62 for this information. If the patron's library card has a magnetic stripe, program flow proceeds to point A of Figure 14 in order to ensure that the library card is removed before any security markers in circulating items are sensitized or de-sensitized. If the patron's

library card has no magnetic stripe, program flow proceeds to point A of Figure 29.

5 If the status returned by the data server 50 to the self-service library terminal 10 indicates that the status of the library patron is not acceptable, the micro-processor 60 determines if the library patron has a PIN. If the patron has a PIN, the microprocessor 60 at a point 307 determines whether a bad-PIN counter R3 has accumulated a count exceeding a predetermined R3 threshold. If not, the
10 microprocessor 60 at a block 308 provides a screen display SCR-14 indicating that the PIN entered by the patron is not recognized by the library system, the bad-PIN counter R3 is incremented at a block 310, and program flow returns to the point D of Figure 6.

15 However, if the count accumulated by the bad-PIN counter R3 has exceeded the predetermined R3 threshold, then the microprocessor 60 at a block 312 provides a screen display SCR-13 indicating that the library patron has made too many attempts at entering a PIN number, and instructing
20 the library patron to remove the card. The microprocessor 60 at a block 314 also determines that the library patron is suspicious and, accordingly, blocks the patron's library card. Thereafter, program flow returns to point C of Figure 6.

If the status returned to the self-service library terminal 10 indicates that the status of library patron is not acceptable, and if the patron had no PIN, the microprocessor 60 at a block 316 provides the screen display SCR-12 indicating that the patron's ID is bad, and instructs the patron to remove the patron's library card. Thereafter, program flow returns to point C of Figure 6.

When the flow chart of Figure 8 is entered through point A, the microprocessor 60 at a block 400 initializes all counters and, at a block 402, provides a screen display SCR-23 indicating that the self-service library terminal 10 is ready for the library patron to present the magnetic stripe of the patron's library card to the magnetic stripe reader 34. Thereafter, or if the flow chart of Figure 8 is entered through point B, the microprocessor 60 at a point 403 determines an appropriate action. For example, if a walkaway timer T9 times out (indicating no activity at the self-service library terminal 10 for a predetermined amount of time), program flow proceeds to point A of Figure 23 because the library patron may have walked away from the self-service library terminal 10 without further processing of the current loan transaction.

On the other hand, the microprocessor 60 may determine that an item has been placed on the cradle 14

because one or both of the photoelectric sensors 20 and 22 is covered or a code is read by the reader 18. If so, the microprocessor 60 determines whether the count of the item-on-cradle counter R9 has exceeded the predetermined R9 threshold. If not, the microprocessor 60 at a block 404 provides the screen display SCR-10 indicating that a circulating item or a library card has been placed on the cradle 14 and that it should be removed. The microprocessor 60 also increments the item-on-cradle counter R9 at a block 406, and program flow returns to the point 403.

If the microprocessor 60 determines that the count of the item-on-cradle counter R9 has exceeded the predetermined R9 threshold, the microprocessor 60 at a block 407 provides the screen display SCR-9 indicating that an item has been placed on the cradle 14, that it should be removed, and that the patron has exceeded the allowable number of attempts to properly process the patron's library card through the magnetic stripe reader 34. If the patron removes the item before a walkaway-item-removed timer T16 times out, program flow proceeds through point C of Figure 8. However, if the patron does not remove the item before the walkaway-item-removed timer T16 times out, program flow proceeds to the walkaway routine of Figure 23.

If the action determined at the point 403 is that the magnetic stripe on a patron's library card is read by the magnetic stripe reader 34, then the microprocessor 60 at a block 408 converts the magnetic stripe ID to a machine processable code and determines from the code whether the library patron is a previously blocked patron (i.e., a library patron whose card has been previously blocked) and whether a blocked patron timer T12 has not expired. If the library patron is a previously blocked patron and the blocked patron timer T12 has not expired, the microprocessor 60 at a block 410 provides the screen display SCR-12 indicating that the library patron is refused service at the self-service library terminal 10, and directs the library patron to go to the circulation desk of the library. Thereafter, program flow returns to the welcome screen. If the library patron is a previously blocked patron, or if the blocked patron timer T12 has expired, the microprocessor 60 determines whether the patron has a PIN. If not, program flow proceeds to point A of Figure 9. The blocked patron timer T12 gives the patron the time to go to the circulation desk in order to resolve any problems with the patron's library card. Once the patron's problem has been resolved, the blocked patron timer T12 will have expired, and the patron will no longer be blocked.

On the other hand, if the microprocessor 60 determines that the patron has a PIN, the microprocessor 60 executes the program represented by the flow chart shown in Figure 13 which returns PIN ENTERED or NO PIN ENTERED, as appropriate. If PIN ENTERED is returned, program flow proceeds to point A of Figure 9. If NO PIN ENTERED is returned, then the microprocessor 60 at a block 412 provides a screen display SCR-17 informing the patron that the patron did not enter a PIN. Thereafter, program flow returns to the welcome screen.

If the microprocessor 60 is at the point 403, and if a maximum event timer T10 times out before (i) an item is placed on the cradle 14 or a video is placed in the video slot 30, (ii) a magnetic card is read by the magnetic stripe reader 34, and (iii) the patron begins a termination sequence, then the microprocessor 60 determines whether the count accumulated by the please counter R1 has exceeded the predetermined R1 threshold. If so, program flow returns to the welcome screen. If not, the microprocessor 60 at a block 414 provides a screen display SCR-24 instructing the patron to present the patron's library card to the magnetic stripe reader 34. Also, the microprocessor 60 at a block 416 increments the count of the please counter R1, and program returns to point 403 of Figure 8.

If the library patron chooses to terminate the transaction, the microprocessor executes the program represented by the flow chart of Figure 21, and program flow returns to the welcome screen.

5 When the flow chart of Figure 9 is entered through point A, the microprocessor 60 at a block 500 provides a screen display SCR-18 to the library patron indicating that the self-service library terminal 10 is processing the patron's ID contained on the patron's library card. The
10 microprocessor 60 at a block 502 also sends a request to the data server 50 for the patron's status, and the data server 50 returns the patron's status to the self-service library terminal 10. An unacceptable status may be returned if the magnetic stripe on the library card was not properly read, or if the patron entered a bad PIN. If the microprocessor
15 60 determines on the basis of the returned status that the status of the library patron is acceptable, program flow proceeds to point A of Figure 29. On the other hand, if the status is not acceptable, the microprocessor 60 determines whether the count accumulated by a bad-ID counter R4 has exceeded a predetermined R4 threshold. If the microproces-
20 sor 60 determines that the count accumulated by the bad-ID counter R4 has exceeded the predetermined R4 threshold, the microprocessor 60 at a block 504 provides the screen display

SCR-16 indicating that the library patron has a bad identification and has made too many attempts to enter the correct identification. Program flow then returns to point C of Figure 8, and thereafter to the welcome screen.

5 However, if the microprocessor 60 determines that the count accumulated by the bad-ID counter R4 has not exceeded the predetermined R4 threshold, the microprocessor 60 at a block 506 provides a screen display SCR-15 indicating that the self-service library terminal 10 cannot recognize the identification provided by the library patron and requests the library patron to present the magnetic stripe on the patron's library card to the magnetic stripe reader 34 again. Also, the microprocessor 60 increments the count of the bad-ID counter R4 at a block 508, and program returns to point B of Figure 8.

10 When the flow chart of Figure 10 is entered through point A, the microprocessor 60 at a block 600 initializes counters and at a block 602 provides a screen display SCR-22 indicating to the library patron that the self-service library terminal 10 is ready for the library patron to enter the patron's identification through use of the keypad 32. (The microprocessor 60 may cause an asterisk or other symbol to appear on the display 28 as the patron enters each character of the patron's identification.)

Thereafter, or if the flow chart of Figure 10 is entered through point B, the microprocessor 60 determines an appropriate action at a point 603. For example, if a walkaway timer T14 has timed out before the patron takes action at this point, program flow proceeds to Figure 23 because the microprocessor 60 assumes that the library patron has walked away from the self-service library terminal 10 without completing a transaction.

On the other hand, if a circulating item is placed on the cradle 14 or a video is placed in the video slot 30, the microprocessor 60 determines whether the item-on-cradle counter R9 has accumulated a count greater than the predetermined R9 threshold. If not, the microprocessor 60 at a block 604 provides the screen display SCR-10 indicating that the patron has incorrectly placed an item on the cradle 14 or in the video slot 30 and instructs the patron to remove the item. Also, the microprocessor 60 increments the item-on-cradle counter R9 at a block 606. If the item-on-cradle counter R9 has accumulated a count greater than the predetermined R9 threshold, the microprocessor 60 at a block 608 provides the screen display SCR-9 indicating that a circulating item is placed on the cradle and instructing the patron to remove the circulating item. If the patron removes the item before a walkaway-item-removed timer T16

times out, program flow proceeds through point C of Figure 10. However, if the patron does not remove the item before the walkaway-item-removed timer T16 times out, program flow proceeds to the walkaway routine of Figure 23.

5 If the microprocessor 60 determines that the library patron has entered an identification number through the use of the keypad 32 followed by the # or * sign, the microprocessor 60 converts the identification number to the patron's ID and determines whether the patron is a previously blocked patron. The microprocessor 60 also determines if a blocked patron timer T17 has timed out. If the patron is a previously blocked patron and if the blocked patron timer T17 has not timed out, the microprocessor 60 at a block 609 provides the screen display SCR-12 indicating that the patron's loan transaction is being refused and instructing the patron to go to the circulation desk for further processing. Thereafter, flow returns to the welcome screen.

10
15
20 If the patron is not a previously blocked patron, or if the blocked patron timer T17 has timed out, the microprocessor 60 determines whether the library patron has a PIN number in the memory 62. If not, flow proceeds to point A of Figure 11. If so, the microprocessor 60 executes the program represented by the flow chart of Figure 13 which returns either PIN ENTERED or NO PIN ENTERED. If PIN EN-

TERED is returned, program flow proceeds to point A of Figure 11. If NO PIN ENTERED is returned, then the microprocessor 60 at a block 610 provides the screen display SCR-17 indicating that the patron has not entered a PIN number, and program flow then returns to the welcome screen.

If a maximum event timer T15 times out before (i) an item is placed on the cradle 14 or in the video slot 30, (ii) the patron presses the # or * key, and (iii) the patron initiates a termination sequence, the microprocessor 60 at a point 611 determines whether the count of the please counter R1 has exceeded the predetermined R1 threshold. If the count of the please counter R1 has exceeded the predetermined R1 threshold, program flow returns to the welcome screen. On the other hand, if the count of the please counter R1 has not exceeded the predetermined R1 threshold, the microprocessor 60 at a block 612 provides a screen display SCR-19 instructing the library patron to enter the patron's ID. Also, the microprocessor 60 at a block 614 increments the please counter R1. Thereafter, flow returns to point 603 of Figure 10.

Finally, if the patron presses the # or * key without pressing any other key, program flow proceeds to point 611, and if the library patron elects to terminate the current transaction, the microprocessor executes the program

represented by the flow chart of Figure 21, and program flow returns to the welcome screen.

When the flow chart of Figure 11 is entered through point A, the microprocessor 60 at a block 700 provides the screen display SCR-18 to the library patron informing the library patron that the self-service library terminal 10 is checking the patron's identification. The microprocessor 60 at a block 702 sends a request to the data server 50 for the patron's status which is returned to the self-service library terminal 10. (The status of a patron may be unacceptable if, for example, the patron entered an incorrect PIN.) If the microprocessor 60 determines from this returned status that the library patron's status is acceptable, program flow proceeds to point A of Figure 29. On the other hand, if the status of the library patron returned to the self-service library terminal 10 is not acceptable, the microprocessor 60 determines if the count accumulated by the bad-ID counter R4 has exceeded the predetermined R4 threshold. If the count accumulated by the bad-ID counter R4 has exceeded the predetermined R4 threshold, the microprocessor 60 at a block 704 provides a screen display SCR-20 informing the library patron that the patron's ID is bad and that the library patron has exceeded the allowable number of attempts to enter the correct ID.

Thereafter, flow returns to point C of Figure 10. On the other hand, if the count accumulated by the bad-ID counter R4 has not exceeded the predetermined R4 threshold, the microprocessor 60 at a block 706 provides a screen display SCR-21 informing the library patron that the patron's ID is not recognized and instructing the patron to retry entering the patron's ID. Thereafter, the microprocessor 60 at a block 708 increments the bad-ID counter R4, and program flow returns to point B of Figure 10.

When the flow chart of Figure 12 is entered from Figure 6, the microprocessor 60 at a block 800 provides a screen display SCR-27 instructing the library patron to enter the library patron's PIN number. The microprocessor 60 skips the block 800 if the count accumulated by the bad-PIN counter R3 is greater than zero. Thereafter, the microprocessor 60 determines whether the library patron has removed the patron's library card from the cradle 14. If the patron's library card has been removed, CARD REMOVED is returned to Figure 6. If the patron's library card has not been removed, the microprocessor 60 performs a loop as shown in Figure 12 as each character of the patron's PIN is entered until the patron presses the # or * key on the keypad 32. When the # or * key is pressed, PIN ENTERED is returned to Figure 6. If the # or * key is pressed before the first

character of the patron's PIN is entered, the microprocessor 60 at a block 802 provides a screen display SCR-25 instructing the user to enter the PIN number. Also, the microprocessor 60 increments the count of the please counter R5 at a block 804 and another pass is made through the loop. Similarly, if the maximum event timer T18 times out before the patron presses the # or * key, and if the count accumulated by the please counter R5 has not exceeded a predetermined R5 threshold, the microprocessor 60 provides the screen display SCR-25 and increments the count of the please counter R5, and another pass is made through the loop. If the maximum event timer T18 times out before the patron presses the # or * key, and if the count accumulated by the please counter R5 exceeds the predetermined R5 threshold, NO PIN ENTERED is returned to Figure 6.

When the flow chart of Figure 13 is entered from Figure 8 or Figure 10, the microprocessor 60 at a block 900 provides the screen display SCR-27 instructing the library patron to enter the library patron's PIN number. The microprocessor 60 skips the block 900 if the count accumulated by the bad-PIN counter R3 is greater than zero. The microprocessor 60 performs a loop as shown in Figure 13 as each character of the patron's PIN is entered, until the patron presses the # or * key on the keypad 32. When the # or *

key is pressed, PIN ENTERED is returned to Figure 8 or Figure 10. If the # or * key is pressed before the first character of the patron's PIN is entered, the microprocessor 60 at a block 902 provides the screen display SCR-25 instructing the user to enter the PIN number. Also, the microprocessor 60 increments the count of the please counter R5 at a block 904 and another pass is made through the loop. Similarly, if a maximum event timer T19 times out before the patron presses the # or * key, and if the count accumulated by the please counter R5 has not exceeded the predetermined R5 threshold, the microprocessor 60 provides the screen display SCR-25 and increments the count of the please counter R5, and another pass is made through the loop. If the maximum event timer T19 times out before the patron presses the # or * key times out, and if the count accumulated by the please counter R5 exceeds the predetermined R5 threshold, NO PIN ENTERED is returned to Figure 8 or Figure 10.

When the flow chart of Figure 14 is entered through point A from the routine shown in Figure 7, the microprocessor 60 at a block 1000 provides a screen display SCR-30 to the patron instructing the patron to remove the patron's library card. Accordingly, the magnetic stripe on the patron's library card will not be demagnetized when the security marker in the circulating item being checked out is

desensitized or when the security marker in the circulating item being checked in is sensitized. Thereafter, the microprocessor 60 determines an appropriate action at a point 1001. For example, if a sensor, such as the idle indicator 16, the photoelectric sensor 20, the photoelectric sensor 22, and/or the like, determines that the patron has taken an action other than removing the patron's library card, the microprocessor 60 at a block 1002 provides a screen display SCR-58 instructing the library patron to remove the library card in order to continue with the transaction. Thereafter, the program flow returns to the point 1001. If the microprocessor 60 determines that the card has been removed, program flow proceeds to point A of Figure 29. If a walk-away timer T20 times out before the card is removed and the microprocessor 60 determines no change of state of any of the sensors, program flow proceeds to the walkaway routine of Figure 22.

The flow chart of Figure 15 is entered through point A, point B, point C, point D, or point E. When the flow chart of Figure 15 is entered through point A from Figure 29, the microprocessor 60 controls the scan line projected on to the cradle 14 by the reader 18 as a long flashing (LF) scan line, and the microprocessor 60 at a block 1102 provides a screen display SCR-31 instructing the

library patron to place a circulating item in an appropriate item receiving area. Thereafter, the microprocessor 60 at a point 1103 determines an appropriate action. For example, if the patron's library card is removed from the cradle 14 before a circulating item is placed on the cradle 14, the microprocessor 60 determines whether a first circulating item has already been processed during the current loan transaction. If a first circulating item is yet to be processed during the current loan transaction, the microprocessor 60 at a block 1104 provides a screen display SCR-11 indicating that the card has been removed. (If the patron entered the patron's ID through use of the reader 18, the patron's library card must remain on the cradle 14 throughout the loan transaction.) Thereafter, program flow returns to point B of Figure 6 in order to lead the patron back through the identification process. If patron's library card is removed but a first circulating item has already been processed, program flow proceeds to Figure 21.

If a walkaway timer T21 has timed out before the patron takes any action at the point 1103, program flow proceeds to Figure 22 or Figure 23, as appropriate. If the action determined by the microprocessor 60 is that the library patron desires to terminate the current transaction,

the microprocessor 60 executes the program represented by the flow chart of Figure 21.

If the action determined by the microprocessor 60 is that a video cassette has been inserted into the video slot 30 of the self-service library terminal 10, program flow proceeds to point A of Figure 19.

If the action determined by the microprocessor 60 is that both of the photoelectric sensors 20 and 22 are covered, the microprocessor 60 determines whether an item identifier is being read by the reader 18 from a circulating item, and whether the item identifier being read is not a patron ID. If an item identifier is being read by the reader 18 from a circulating article, and if the item identifier being read is not a patron ID, the microprocessor 60 determines whether a code-type check (inspection) is enabled and, if so, whether the item identifier being read by the reader 18 is of an incorrect type (i.e., a type which is different from the item identifier used on circulating items meant to be processed on the cradle 14). For example, the patron may have placed a correct circulating item on the cradle 14 but in such a position that the reader 18 is reading a code other than the item identifier. If the code-type check is not enabled, or if the reader 18 is reading an item identifier used on circulating items meant to be pro-

5 cessed on the cradle 14, the microprocessor 60 determines
whether the item identifier read by the reader 18 has been
previously processed during the patron's current transac-
tion. If the item identifier read by the reader 18 has not
been previously processed during the patron's current trans-
action, the scan line projected by the reader 18 is con-
trolled so that it is long and steady (LS), and program flow
proceeds to point A of Figure 16 in order to proceed with
the checkout of the circulating item that is currently on
10 the cradle 14.

15 On the other hand, if the item identifier read by
the reader 18 has been previously processed during the
patron's current transaction, the microprocessor 60 deter-
mines whether the item identifier currently being processed
is on a failed or canceled list. If the item identifier
currently being processed is not on a failed or canceled
list, the microprocessor 60 provides a screen display SCR-38
at a block 1106 indicating that the item has already been
processed. Also, a happy tone (indicated by the smiley
20 face) is provided to the library patron. Thereafter, the
microprocessor 60 changes the scan line projected by the
reader 18 to a long and flashing (LF) scan line. If the
patron does not acknowledge that the item has already been
processed before a walkaway-item-removed timer T24 times

out, the walkaway routine of Figure 22 is entered. If the patron does acknowledge that the item has already been processed before the walkaway-item-removed timer T24 times out, program flow proceeds to a block 1108 where a screen display SCR-75 is provided indicating that the self-service library terminal 10 is ready for the next circulating item to be checked out by the library patron, and a reposition counter R6 is reset at a block 1110. The microprocessor 60 is then ready to determine another appropriate action.

If the item identifier currently being processed is on a failed or canceled list, the microprocessor 60 provides a screen display SCR-64 at a block 1112 instructing the library patron to take the circulating item to the circulation desk. Thereafter, the microprocessor 60 sets the scan line projected by the reader 18 to long and flashing and, if the walkaway-item-removed timer T24 has not timed out, provides the screen display SCR-75, and resets the reposition counter R6. The microprocessor 60 is then ready to determine another appropriate action.

If the code-type check is enabled, and if the reader 18 is reading an item identifier used on circulating items meant to be processed on the cradle 14, the microprocessor 60 determines whether a wrong-identification counter R10 has accumulated a count that exceeds a predetermined R10

threshold. If the wrong-identification counter R10 has not accumulated a count that exceeds the predetermined R10 threshold, the microprocessor 60 provides a screen display SCR-37 at a block 1114 indicating that the library patron is using the wrong bar code, the microprocessor 60 at a block 1116 increments the wrong-identification counter R10, and program flow returns to point 1103 of the routine shown in Figure 15. If the wrong-identification counter R10 has accumulated a count which exceeds the predetermined R10 threshold, the microprocessor 60 provides the screen display SCR-37 at a block 1118 indicating that the library patron is using the wrong identification under the reader 18. Thereafter, the microprocessor 60 sets the scan line projected by the reader 18 to long and flashing and, if the walkaway-item-removed timer T24 has not timed out, provides the screen display SCR-75, and resets the reposition counter R6.

If both of the photoelectric sensors 20 and 22 are covered, and if a maximum event timer T23 times out before the reader 18 reads an item identifier on a circulating item, the microprocessor 60 at a point 1119 determines whether the reposition counter R6 has accumulated a count greater than a predetermined R6 threshold. If the reposition counter R6 has not accumulated a count greater than the predetermined R6 threshold, the microprocessor 60 at a block

1120 provides a screen display SCR-36 indicating that the reader 18 cannot read the item identifier and directing the patron to reposition the circulating item on the cradle 14. Also, the microprocessor 60 at a block 1122 increments the reposition counter R6, and program flow proceeds to the point 1103.

If the count accumulated by the reposition counter R6 exceeds the predetermined R6 threshold, the microprocessor 60 at a block 1124 provides a screen display SCR-35 indicating that the reader 18 cannot read the bar code on the circulating item and to take the circulating item to the circulation desk for processing by a member of the library staff. Thereafter, the microprocessor 60 sets the scan line projected by the reader 18 to long and flashing. Assuming that the walkaway-item-removed timer T24 does not time out, program flow proceeds to the block 1108.

If the action determined by the microprocessor 60 at the point 1103 is that the idle indicator 16 is not read (indicating that a circulating item may be on the cradle 14 and covering the idle indicator 16), and that neither of the photoelectric sensors 20 and 22 is covered, the microprocessor 60 proceeds to the point 1119 and follows the flow through the blocks 1120 and 1122, or the block 1124, as described above.

5 If the action determined by the microprocessor 60
at the point 1103 is that an item identifier is read by the
reader 18, that the identification read by the reader 18 is
not a patron's ID, that both of the photoelectric sensors 20
and 22 are not covered, and a maximum event timer T22 has
accumulated a predetermined amount of time, the microproces-
sor 60 at a point 1125 determines whether the reposition
counter R6 has accumulated a count greater than the prede-
termined R6 threshold. If the reposition counter R6 has not
10 accumulated a count greater than the predetermined R6
threshold, the microprocessor 60 at a block 1126 provides a
screen display SCR-32 indicating that the patron should push
the circulating item against the back wall 26. Also, the
microprocessor 60 at a block 1128 increments the reposition
15 counter R6, and program flow proceeds to the point 1103.

If the count accumulated by the reposition counter
R6 exceeds the predetermined R6 threshold, the microproces-
sor 60 at a block 1129 provides a screen display SCR-34
indicating that the position of the circulating item on the
20 cradle 14 is incorrect and directing the patron to ask for
help. Thereafter, the microprocessor 60 sets the scan line
projected by the reader 18 to long and flashing. Assuming
that the walkaway-item-removed timer T24 does not time out,
program flow proceeds to the block 1108.

5 If the microprocessor 60 is at the point 1103, and
if a maximum event timer T11 times out before (i) the pa-
tron's library card is removed from the cradle 14, (ii) the
patron initiates a termination sequence, (iii) a video
cassette has been inserted into the video slot 30 of the
self-service library terminal 10, (iv) both of the photo-
electric sensors 20 and 22 are covered, (v) the idle indica-
tion is not read and neither of the photoelectric sensors 20
and 22 is covered, and (vi) an item identifier is read by
10 the reader 18, the identification read by the reader 18 is
not a patron's ID, both of the photoelectric sensors 20 and
22 are not covered, and the maximum event timer T22 has
timed out, the microprocessor 60 at a block 1130 provides a
screen display SCR-33 directing the patron to place a book,
15 a CD, or a video in the appropriate circulating item receiv-
ing area, and program flow proceeds to the point 1103.

The routine shown in Figure 16 is entered from
Figure 15. When the routine shown in Figure 16 is entered,
the microprocessor 60 at a block 1200 provides a screen
display SCR-43 indicating that a book/CD is being checked
20 out by the self-service library terminal 10, or a screen
display SCR-44 indicating that a video is being checked out
by the self-service library terminal 10. Thereafter, the
microprocessor 60 at a block 1202 enables multiple book

detection (so that this function begins running) and, at a block 1204, enters the multiple book detection routine shown in Figure 17. Assuming that the routine shown in Figure 17 returns to the routine shown in Figure 16, the microprocessor 60 at a block 1206 sends a checkout request to the data server 50 of the library. If the data server 50 determines that checkout is successful, the microprocessor 60 at a point 1207 determines whether a video is on the cradle 14. If a video is not on the cradle 14, program flow proceeds to point A of Figure 18 in order to execute final checkout processing.

However, if a video is on the cradle 14, then the microprocessor 60 determines whether a Magnetic Media on Cradle option is enabled. (A library may decide to allow a patron to check out videos from the cradle 14.) If so, program flow proceeds to point A of Figure 18. If the library decides not to allow a patron to check out videos from the cradle 14, the microprocessor 60 determines whether a VCU (video check out unit) is available. For example, the microprocessor 60 determines whether the self-service library terminal 10 is equipped with the video slot 30 and a video identification reader in order to process video checkouts. If a VCU is not available, program flow proceeds to point A of Figure 20 in order to undo all of the checkout

processing executed thus far, and a take-video-to-desk flag is set. If a VCU is available, then program flow proceeds to point A of Figure 20, and a video-on-cradle flag is set.

5 If the checkout is not successful, the microprocessor 60 determines whether the patron must pay a charge in order to check out the particular circulating item being processed. If a charge for this circulating item is not required, the microprocessor 60 at a block 1208 provides a screen display SCR-46 indicating that the checkout has
10 failed and provides the specific reason why the checkout failed. Thereafter, program flow proceeds to point C of Figure 15.

15 If a charge for this circulating item is required, the microprocessor 60 determines whether the self-service library terminal 10 is enabled to process chargeable loans. If the self-service library terminal 10 is not enabled to process chargeable loans, the microprocessor 60 at a block 1210 provides a screen display SCR-49 indicating that the checkout has failed and further indicates that the particular item being checked out is a chargeable item. Thereafter, flow proceeds to point C of Figure 15.
20

If the self-service library terminal 10 is enabled to process chargeable loan, the microprocessor 60 at a block 1212 provides a screen display SCR-45 indicating that the

circulating item is a chargeable item and asking the patron if the patron agrees to the charge. The microprocessor 60 also initializes a please-answer counter R7 at a block 1214. Thereafter, the microprocessor 60 at a point 1215 determines whether the patron agrees to the charge. If the patron agrees to the charge (by pressing the # key on the keypad 32), program flow proceeds to the point 1207. If the patron does not agree to the charge (by pressing the * key on the keypad 32), the microprocessor 60 at a block 1216 provides either a screen display SCR-47 instructing the patron to remove the book or CD from the cradle 14, or a screen display SCR-48 instructing the patron to remove the video from the video slot 30, as appropriate. Thereafter, program flow returns to point C of Figure 15.

If the patron at the point 1215 presses a key other than the # or * key on the keypad 32, the microprocessor 60 at a block 1218 increments the please-answer counter R7, and the microprocessor 60 at a block 1220 provides a screen display SCR-59 reminding the patron that the loan is a chargeable loan. Thereafter, program flow returns to the point 1215. If the patron at the point 1215 does not press any key before a maximum event time T25 times out, the microprocessor 60 determines whether the count accumulated by the please-answer counter R7 has exceeded a predetermined

R7 threshold. If the count accumulated by the please-answer counter R7 has exceeded the predetermined R7 threshold, program flow proceeds to the block 1216. If the count accumulated by the please-answer counter R7 has not exceeded the predetermined R7 threshold, program flow proceeds to the block 1218.

The multiple book detection processing indicated at the block 1204 in Figure 16 is shown in Figure 17. When the routine of Figure 17 is entered, the microprocessor 60 first determines whether the circulating item being checked out is a video. If the circulating item is a video, then execution of the processing shown in Figure 17 is inappropriate and flow returns to the block from which the routine shown in Figure 17 was entered.

If the circulating item is not a video, the microprocessor 60 determines whether the multiple book detection (MBD) option has been enabled, such as by the library staff. If the multiple book detection option has not been enabled (so that the block 1202 has no practical effect), the microprocessor 60 at a point 1300 determines whether the photoelectric sensors 20 and 22 are uncovered. If the photoelectric sensors 20 and 22 are covered, program flow returns to the block from which the routine shown in Figure 17 was entered. On the other hand, if the photoelectric sensors 20

and 22 are uncovered (for example, the patron using the self-service library terminal 10 may have started the check-out process with a book that can be checked out and thereafter substituted a book that cannot be checked out), the microprocessor 60 at a block 1301 increments a suspicious-patron counter R8. The microprocessor 60 then determines whether the count accumulated by the suspicious-patron counter R8 is in excess of a predetermined R8 threshold. If the count accumulated by the suspicious-patron counter R8 is not in excess of the predetermined R8 threshold, program flow proceeds to point A of Figure 20 and an item-moved flag is set. If the count accumulated by the suspicious-patron counter R8 is in excess of the predetermined R8 threshold, program flow proceeds through a point 1302 where the microprocessor 60 at a block 1303 disables the patron's ID if the library has elected the blocked card option. After the patron's library card has been blocked at the block 1303, or if the blocked card option is not elected, program flow proceeds to point A of Figure 20 and a suspicious-patron flag is set.

If multiple book detection has been enabled, the microprocessor 60 determines whether multiple books and/or CD's are detected on the cradle 14. If multiple books and/or CD's are not detected on the cradle 14, program flow

proceeds to the point 1300. On the other hand, if multiple books and/or CD's are detected on the cradle 14, the microprocessor 60 at a block 1304 increments the suspicious-patron counter R8 and then determines whether the count accumulated by the suspicious-patron counter R8 is in excess of the predetermined R8 threshold. If the count accumulated by the suspicious-patron counter R8 is in excess of the predetermined R8 threshold, program flow proceeds to point 1302. If the count accumulated by the suspicious-patron counter R8 is not in excess of the predetermined R8 threshold, program flow proceeds to point A of Figure 20 and a one-at-a-time flag is set.

The routine shown in Figure 18 is entered from the routine shown in Figure 16. When the routine shown in Figure 18 is entered, the microprocessor 60 determines whether the circulating item being processed is a chargeable item. If the item is a chargeable item, the microprocessor 60 at a block 1400 then executes the routine shown in Figure 17 and, assuming a return from Figure 17 to Figure 18, the microprocessor 60 at a block 1402 sends a patron check-out request to the data server 50 of the library. If the check-out is not authorized by the data server 50 (for example, the library patron has overdue fines and/or other monies owing and past due), the microprocessor 60 at a block 1404

provides a screen display SCR-50 indicating that checkout has failed and provides the specific reason for checkout failure, and then program flow proceeds to point C of Figure 15.

5 If the loan is not a chargeable loan, or if the checkout authorization is given, the microprocessor 60 at a block 1406 executes the multiple book detection routine shown in Figure 17. Assuming that the multiple book detection routine of Figure 17 returns to Figure 18, the micro-processor 60 at a block 1407 energizes the sensitizer/de-sensitizer 24 in order to desense the security marker in the circulating item currently being checked out. On the other hand, the block 1407 is bypassed if the desensitization function is disabled or if the loan transaction is a re-10 renewal. Thereafter, the microprocessor 60 disables multiple book detection at a block 1408, saves the item identifier of the circulating item being checked out at a block 1410, and at a block 1412 provides a screen display SCR-51 indicating that the loan of a book or CD has been confirmed or a screen display SCR-52 indicating that the loan of a video has been 15 confirmed. Each of these screens displays also instructs the library patron to remove the book or CD from the cradle 14, or the video slot 30, as appropriate. Alternatively, the microprocessor 60 at the block 1412 provides a screen 20

display SCR-60 indicating that a renewal of a book or CD has been confirmed, or a screen display SCR-61 indicating that a renewal of a video has been confirmed, as appropriate. Each of these screens displays also instructs the library patron to remove the book or CD from the cradle 14, or the video slot 30, and also instructs the library patron to place the next item on the cradle 14 or in the video slot 30, as appropriate.

Thereafter, the microprocessor 60 at a block 1413 controls the printer 70 to print a receipt at this time, unless print buffering is enabled in which case the loan transaction is buffered in the memory 62. Thereafter, the microprocessor 60 at a point 1414 determines an appropriate action. For example, if a maximum event timer T27 times out before the current book or CD is removed from the cradle 14 or the current video is removed from the video slot 30, the microprocessor 60 at a block 1415 provides either a screen display SCR-90 directing the patron to remove the book or CD from the cradle 14 or a screen display SCR-91 directing the patron to remove the video from the video slot 30, as appropriate. Thereafter, once the item is removed, program flow proceeds to point E of Figure 15 unless a walkaway-item-removed timer T26' first times out before the circulating item is removed, in which case program flow proceeds to

5 either Figure 22 or Figure 23, as appropriate. If the
microprocessor 60 determines that the book or CD has been
removed from the cradle 14 or that the video has been re-
moved from the video slot 30, as appropriate, program flow
proceeds to point B of Figure 15. If the microprocessor 60
determines that a new book has been placed on the cradle 14
or a new video has been placed in the video slot 30 before
the current book or CD is removed from the cradle 14 or
before the current video is removed from the video slot 30,
10 the microprocessor 60 at a block 1416 provides either a
screen display SCR-77 requesting the library patron to first
remove the current book or CD from the cradle 14 or a screen
display SCR-78 requesting the library patron to first remove
the current video from the video slot 30, as appropriate.
15 Thereafter, program flow returns to the point 1414 unless
all items are removed before a walkaway-item-removed timer
T29 times out, in which case program flow proceeds to either
Figure 22 or Figure 23, as appropriate.

20 The routine shown in Figure 19 is entered from the
routine shown in Figure 15. When the routine shown in
Figure 19 is entered, the microprocessor 60 determines an
appropriate action. For example, if a video is pulled out
of the video slot 30, program flow proceeds to point E of
Figure 15 where the library patron is informed that the

self-service library terminal 10 is ready to process the next item.

5 If the microprocessor 60 determines that a video has been fully inserted into the video slot 30, the microprocessor 60 at a point 1500 determines whether an item identifier is read from the video in the video slot 30. If an item identifier is read from the video in the video slot 30, the microprocessor 60 determines whether the item identifier has already been processed. If the item identifier has not already been processed, program flow proceeds to point A of Figure 16. If the item identifier has already been processed, the microprocessor 60 determines whether the item identifier is on a list of canceled or failed item identifiers. If the item identifier is on this list, the microprocessor 60 at a block 1501 provides a screen display SCR-63 directing the patron to take the video to the circulation desk. Thereafter, program flow proceeds to point C of Figure 15. If the item identifier is not on the canceled or failed list, the microprocessor 60 at a block 1502 provides a screen display SCR-40 indicating that the video has already been checked out. Thereafter, program flow proceeds to point C of Figure 15.

If a maximum event timer T31 times out before an item identifier is read from the video fully inserted into

the video slot 30, the microprocessor 60 determines whether the count of the reposition counter R6 has exceeded the predetermined R6 threshold. If the count accumulated by the reposition counter R6 is greater than the predetermined R6 threshold, the microprocessor 60 at a block 1504 provides a screen display SCR-39 informing the patron that the self-service library terminal 10 cannot read the item identifier from the video and to take the video to the circulation desk. Thereafter, program flow proceeds to point C of Figure 12. On the other hand, if the count accumulated by the reposition counter R6 is less than the predetermined R6 threshold, the microprocessor 60 at a block 1506 provides a screen display SCR-85 directing the patron to reposition the video in the video slot 30. The microprocessor 60 also increments the count of the reposition counter R6 at a block 1508, and program flow then proceeds to point D of Figure 15.

If a maximum event timer T30 times out before the video is pulled out of the video slot 30 or before the video is fully inserted into the video slot 30, the microprocessor 60 at a block 1510 provides a screen display SCR-42 instructing the patron to fully insert the video into the video slot 30. Thereafter, the microprocessor 60 functions in one of three ways. First, if the video is fully inserted

into the video slot 30, program flow proceeds to the point 1500. Second, if a maximum event timer T32 times out before the video is pulled out of the video slot 30 or before the video is fully inserted into the video slot 30, the micro-processor 60 at a block 1512 provides a screen display SCR-41 indicating that the patron should take the video out of the video slot 30 and to try reinserting the video into the video slot 30. Thereafter, program flow proceeds to point C of Figure 15. Third, if the microprocessor 60 determines that the video has been pulled out of the video slot 30 before its item identifier has been read, program flow proceeds to point E of Figure 15.

The routine shown in Figure 20 is entered from the routine shown in Figure 16 or the routine shown in Figure 17, as appropriate. When the routine shown in Figure 20 is entered, the microprocessor 60 at a block 1600 sends a check-in request to the data server 50. If check-in is authorized by the data server 50, the microprocessor 60 determines the reason for the checkin. These reasons depend upon which flags were set as a result of processing by the routines of Figures 16 and 17.

For example, if the take-item-to-desk flag is set, the microprocessor 60 at a block 1602 provides the screen display SCR-46 directing the patron to take the circulating

item (the book or CD) to the circulation desk. Thereafter, program flow proceeds to point C of Figure 15.

On the other hand, if the take-video-to-desk flag is set, the microprocessor 60 at a block 1604 provides a screen display SCR-62 directing the patron to take the video to the circulation desk, and program flow thereafter proceeds to point C of Figure 15.

If the video-on-cradle flag is set, the microprocessor 60 at a block 1606 provides a screen display SCR-54 directing the patron to put the video in the video slot 30. Thereafter, program flow proceeds to point C of Figure 15.

If the one-at-a-time flag is set, the microprocessor 60 at a block 1608 provides the screen display SCR-89 directing the library patron to try again checking out items one at a time and, if the library patron had been trying to check out items one at a time, to take the item to the circulation desk for further processing. Thereafter, program flow proceeds to point C of Figure 15.

If the item-moved flag is set, the microprocessor 60 at a block 1610 provides a screen display SCR-79 informing the library patron that the item has been moved. Thereafter, processing proceeds to point B of Figure 15.

If the suspicious-patron flag is set, the microprocessor 60 at a block 1612 provides a screen display SCR-

56 directing the library patron to take all circulating items to the circulation desk and to pick up the patron's library card. Thereafter, if a walkaway-item-removed timer T34 times out before the patron picks up the patron's library card from the self-service library terminal 10, program flow proceeds to a walkaway routine similar to the routines shown in Figures 22 and 23. On the other hand, if the patron picks up the patron's library card from the self-service library terminal 10 before the walkaway-item-removed timer T34 times out, the microprocessor 60 at a block 1614 causes the printer 70 to print a receipt, unless the printer 70 has a problem, and the microprocessor 60 at a block 1616 provides a screen display SCR-29 directing the library patron to take the receipt from the printer slot 36. However, if the printing of receipts is disabled, program flow bypasses the blocks 1614 and 1616. Thereafter, program flow returns to the welcome screen.

If checkin is not authorized by the data server 50, the microprocessor 60 at a block 1618 adds the circulating item to the canceled or failed list, and program flow proceeds to the block 1602.

The terminate session routine is entered from Figures 8, 10, and 15 and is shown in Figure 21. This routine is entered when a library card is removed or the

terminate session key sequence has been pressed. Upon those occurrences, the microprocessor 60 at a block 1700 causes the printer 70 to print a receipt (unless the printer 70 has a problem, in which case the routine of Figure 28 is executed), and at a block 1702 provides the screen display SCR-29 directing the patron to take the receipt from the printer slot 36. If the printing of receipts is disabled, the blocks 1700 and 1702 are bypassed. Thereafter, program flow returns to the welcome screen.

When the routine shown in Figure 22 is entered, the microprocessor 60 has determined that an appropriate walkaway timer has expired. The microprocessor 60 determines whether the current transaction is a check-in transaction. If the current transaction is a check-in transaction, the microprocessor 60 at a block 1800 instructs the printer 70 to print a receipt indicating the end of the session, and then determines whether items are on the cradle 14 or in the video slot 30. If items are not on the cradle 14 or in the video slot 30, program flow returns to the welcome screen. On the other hand, if items are on the cradle 14 or in the video slot 30, the microprocessor 60 at a block 1802 provides a screen display SCR-26 instructing any patron at or approaching the self-service library terminal 10 that the self-service library terminal 10 is in a walk-away condition

and requesting that the self-service library terminal 10 be cleared. The microprocessor 60 flashes the screen display SCR-26 every thirty seconds and repeats a walk-away tone three times, as indicated by the light bulb symbol. (Accordingly, this walk-away tone indicates that the self-service library terminal 10 requires attention or servicing.) Thereafter, the microprocessor 60 determines whether a patron's library card is on the self-service library terminal 10 or whether there is a circulating item on the cradle 14 or in the video slot 30. If a patron's library card is on the self-service library terminal 10, or if there is a circulating item on the cradle 14 or in the video slot 30, the self-service library terminal 10 waits in this state. If a patron's library card is not on the self-service library terminal 10, or if there is no circulating item on the cradle 14 or in the video slot 30, program flow returns to the welcome screen.

If the current transaction is not a checkin transaction, the microprocessor 60 at a block 1804 disables the patron's library card (if the library has chosen this option and if the microprocessor 60 determines that a library card was read) so that it is blocked and cannot be used again. The microprocessor 60 at a block 1806 then provides the screen display SCR-26 indicating that the self-service

library terminal 10 is in a walk-away condition and requesting that the self-service library terminal 10 be cleared. The microprocessor 60 flashes the screen display SCR-26 every thirty seconds and repeats a walk-away tone three times, as indicated by the light bulb symbol. (Accordingly, this walk-away tone indicates that the self-service library terminal 10 requires attention or servicing.) Thereafter, the microprocessor 60 determines whether a patron's library card is on the self-service library terminal 10 or whether there is a circulating item on the cradle 14 or in the video slot 30. If a patron's library card is on the self-service library terminal 10, or if there is a circulating item on the cradle 14 or in the video slot 30, the self-service library terminal 10 waits in this state. If a patron's library card is not on the self-service library terminal 10, or if there is a circulating item on the cradle 14 or in the video slot 30, program flow returns to the welcome screen.

When the routine shown in Figure 23 is entered, the microprocessor 60 has determined that a walkaway timer expired and, at a block 1900, turns off the reader 18 so that no scan line is projected into the cradle 14. The microprocessor 60 then determines whether there are circulating items on the cradle 14 or in the video slot 30. If circulating items are not on the cradle 14 or in the video

slot 30, program flow returns to the welcome screen. On the other hand, if there are circulating items on the cradle 14 or in the video slot 30, the microprocessor 60 at a block 1902 provides the screen display SCR-26 indicating that the self-service library terminal 10 is in a walk-away condition and requesting that the self-service library terminal 10 be cleared. Thereafter, the microprocessor 60 determines whether there are still circulating items on the cradle 14 or in the video slot 30. If circulating items are still on the cradle 14 or in the video slot 30, the microprocessor 60 remains in this state until the circulating items are removed. Also, the microprocessor 60 repeats the walk-away tone three times and flashes the walk-away screen display SCR-26 every thirty seconds. If circulating items are not on the cradle 14 or in the video slot 30, program flow returns to the welcome screen.

The routine shown in Figure 24 is entered when the self-service library terminal 10 is configured only for checkin. At start-up, if the staff of the library in which the self-service library terminal 10 is used determines that the self-service library terminal 10 is not to be used during a particular time period, then the microprocessor 60 at a block 2000 retrieves the out-of-service screen display SCR-28 from the memory 62 and displays that out-of-service

screen display on the display 28. On the other hand, if the microprocessor 60 detects an error at start up, then the microprocessor 60 as indicated by a block 2002 retrieves the out-of-service screen display SCR-82 from the memory 62 and displays this out-of-service screen display on the display 28. As indicated in Figure 4, the self-service library terminal 10 may be arranged to allow the patron to continue under certain error conditions.

However, assuming that the staff of the library has not determined that the self-service library terminal 10 is not to be used during a particular time period, and assuming that the microprocessor 60 does not detect an error at start up, or if the patron is allowed to continue even though there is an error, the microprocessor 60 at a block 2004 retrieves a screen display SCR-80 directing the patron to place a circulating item on the cradle 14 or in the video slot 30, as appropriate. Thereafter, the microprocessor 60 changes the scan line projected by the reader 18 to a long and flashing (LF) scan line, and program flow proceeds to the point B of Figure 25.

The flow chart of Figure 25 is entered from Figure 5 or 24. When the flow chart of Figure 25 is entered, the microprocessor 60 at a point 2100 determines an appropriate action. For example, if the microprocessor 60 determines

that a circulating item has already been checked in during the patron's current session at the self-service library terminal 10, but that the maximum event timer T11 has timed out before the patron takes a further action, the microprocessor 60 at a block 2102 provides the screen display SCR-81 directing the patron to place a book or CD on the cradle or a video in the video slot 30, and program flow returns to the point 2100. On the other hand, if the microprocessor 60 determines that a circulating item has already been checked in during the patron's current session at the self-service library terminal 10, and if the walkaway timer T21 times out before the patron takes any action, the microprocessor 60 executes a walkaway routine similar to those shown in Figures 22 and 23.

If the action determined by the microprocessor 60 is that the library patron has initiated a termination sequence desiring to terminate the current transaction, the microprocessor 60 enters the program represented by the flow chart of Figure 21.

If the action determined by the microprocessor 60 is that a video cassette has been inserted into the video slot 30 of the self-service library terminal 10, program flow proceeds to point A of Figure 27.

If the action determined by the microprocessor 60 is that both of the photoelectric sensors 20 and 22 are covered, the microprocessor 60 determines whether an item identifier is being read by the reader 18 from a circulating article, and whether the item identifier being read is not a patron ID. If an item identifier is being read by the reader 18 from a circulating item, and if the item identifier being read is not a patron ID, the microprocessor 60 determines whether a code-type check (inspection) is enabled and, if so, whether the item identifier being read by the reader 18 is of an incorrect type (i.e., a type which is different from the item identifier used on circulating items meant to be processed on the cradle 14). If the code-type check is not enabled, or if the reader 18 is reading an item identifier used on circulating items meant to be processed on the cradle 14, the microprocessor 60 determines whether the item identifier read by the reader 18 has been previously processed during the patron's current transaction. If the item identifier read by the reader 18 has not been previously processed during the patron's current transaction, the scan line projected by the reader 18 is controlled so that it is long and steady (LS), and program flow proceeds to point A of Figure 26 in order to proceed with the checkout of the circulating item that is currently on the

cradle 14. On the other hand, if the item identifier read by the reader 18 has been previously processed, program flow proceeds to point B of Figure 26.

5 If the code-type check is enabled, and if the reader 18 is not reading an item identifier used on circulating items meant to be processed on the cradle 14, the microprocessor 60 provides the screen display SCR-37 at a block 2104 indicating that the library patron is using the wrong item identifier, and program flow returns to point 2100 of the routine shown in Figure 25.

10 If both of the photoelectric sensors 20 and 22 are covered, but if the maximum event timer T23 times out before the reader 18 reads an item identifier on a circulating item, the microprocessor 60 at a point 2106 determines
15 whether the reposition counter R6 has accumulated a count greater than the predetermined R6 threshold. If the reposition counter R6 has not accumulated a count greater than the predetermined R6 threshold, the microprocessor 60 at a block 2108 provides the screen display SCR-36 indicating that the
20 reader 18 cannot read the item identifier and directing the patron to reposition the circulating item on the cradle 14. Also, the microprocessor 60 at a block 2110 increments the reposition counter R6, and program flow proceeds to the point 2100.

5 If the count accumulated by the reposition counter
R6 exceeds the predetermined R6 threshold, the microproces-
sor 60 at a block 2112 provides the screen display SCR-35
indicating that the reader 18 cannot read the bar code on
the circulating item and directing the patron to take the
circulating item to the circulation desk for processing by a
member of the library staff. Thereafter, the microprocessor
60 sets the scan line projected by the reader 18 to long and
flashing (LF). If the patron does not remove the circulat-
10 ing item from the cradle 14 before the walkaway-item-removed
timer T24 times out, the walkaway routine of Figure 22 is
entered. If the patron does remove the circulating item
from the cradle 14 before the walkaway-item-removed timer
T24 times out, program flow proceeds to a block 2114 where
15 the microprocessor 60 provides the screen display SCR-81
indicating that the self-service library terminal 10 is
ready for the next circulating item, and resets the reposi-
tion counter R6 at a block 2116.

20 If the action determined by the microprocessor 60
is that the idle indicator 16 is not read (indicating that a
circulating item may be on the cradle 14 and covering the
idle indicator 16), and that both of the photoelectric
sensors 20 and 22 are not covered, the microprocessor 60

proceeds to the point 2106 and follows the flow through the blocks 2108 and 2110, or the block 2112, as described above.

If the action determined by the microprocessor 60 is that an item identifier is read by the reader 18, that both of the photoelectric sensors 20 and 22 are not covered, and that the maximum event timer T22 has timed out, the microprocessor 60 determines whether the reposition counter R6 has accumulated a count greater than the predetermined R6 threshold. If the reposition counter R6 has not accumulated a count greater than the predetermined R6 threshold, the microprocessor 60 at a block 2118 provides the screen display SCR-32 directing the patron to push the circulating item against the back wall 26. Also, the microprocessor 60 at a block 2120 increments the reposition counter R6, and program flow proceeds to the point 2100.

If the count accumulated by the reposition counter R6 exceeds the predetermined R6 threshold, the microprocessor 60 at a block 2122 provides the screen display SCR-34 indicating that the position of the circulating item on the cradle 14 is incorrect and directing the patron to ask for help. Thereafter, the microprocessor 60 sets the scan line projected by the reader 18 to long and flashing. If the patron does not ask for help before the walkaway-item-removed timer T24 times out, program flows proceeds to the

walkaway routine shown in Figure 22. If the patron does not ask for help before the walkaway-item-removed timer T24 times out, program flows proceeds to the block 2114.

5 The routine shown in Figure 26 is entered from the routine shown in Figure 25. When the routine shown in Figure 26 is entered through point A, the microprocessor 60 at a block 2200 provides either a screen display SCR-69 indicating that the self-service library terminal 10 is being used to check in a book or CD or a screen display SCR-10 70 indicating that the self-service library terminal 10 is being used to check in a video, as appropriate. Thereafter, the microprocessor 60 at a block 2202 sends a check-in request to the data server 50 of the circulation system. The microprocessor 60 then determines if checkin is success-15 ful. If checkin is not successful, the microprocessor 60 at a block 2204 provides a screen display SCR-65 indicating that checkin has failed, providing the particular reason for the failed checkin, and directing the library patron to take the circulating item to the circulation desk. Thereafter,20 program flow proceeds to point C of Figure 25.

If checkin is successful (or if the item has already been checked-in), the microprocessor 60 determines whether a video is on the cradle 14. If a video is not on the cradle 14, the microprocessor 60 at a block 2206

resensitizes the magnetic security marker in the circulating item, saves the item identifier, and designates a storage bin or other location into which the library patron will be directed to place the circulating item. These storage bins may be arranged as sort bins so that, when the microprocessor 60 directs the library patron to place the circulating item into a storage bin, the library patron is in effect sorting the circulating item. Thereafter, the microprocessor 60 at a block 2207 provides either a screen display SCR-67 in the case where a book or a CD is being checked in or a screen display SCR-68 in the case where a video is being checked in. Both of these screen displays confirm the checkin, direct the patron to remove the circulating item, and directs the library patron to place the circulating item into the designated storage bin.

The microprocessor 60 at a block 2208 then directs the printer 70 to print a receipt, unless the information to be printed is being buffered, in which case the block 2208 is bypassed. The microprocessor 60 at a point 2210 then determines which appropriate action to take. For example, if the maximum event timer T27 times out before the current circulating item is removed, the microprocessor 60 at a block 2211 provides either a screen display SCR-73 directing the patron to remove the book or CD from the cradle 14 or a

screen display SCR-74 directing the patron to remove the video from the video slot 30. Thereafter, program flow proceeds to point C of Figure 25.

5 If the microprocessor 60 determines that the book or CD on the cradle 14 or the video in the video slot 30 has been removed, program flow proceeds to point B of Figure 25.

10 If the microprocessor 60 determines that a new book or CD has been placed on the cradle 14 before the current book or CD is removed, or that a new video has been inserted into the video slot 30 before the current video is removed, the microprocessor 60 at a block 2212 provides either a screen display SCR-71 directing the library patron to first remove the current book or CD from the cradle 14, or a screen display SCR-72 directing the library patron to first remove the current video from the video slot 30. If the patron does not remove the circulating item before the walkaway-item-removed timer T29 times out, program flow proceeds to a walkaway routine similar to the walkaway routines shown in Figures 22 and 23. If the patron removes the circulating item before walkaway-item-removed timer T29 times out, program flow returns to point 2210.

20 If a video is on the cradle 14, the microprocessor 60 determines whether the library has selected the Magnetic Media on Cradle option. If the Magnetic Media on Cradle

option has been selected, the microprocessor 60 at a block 2214 essentially executes the same processing as indicated by the block 2206, except that the sensitizer/desensitizer 24 is not energized because, otherwise, information would be lost from the video. Program flow then proceeds to the block 2207. However, if the Magnetic Media on Cradle option has not been selected, the microprocessor 60 determines whether the self-service library terminal 10 has a video slot 30 and a video reader 74 (i.e., a VCU). If the self-service library terminal 10 has a VCU, the microprocessor 60 at a block 2216 provides the screen display SCR-54 directing the patron to put the video in the video slot 30. Thereafter, program flow proceeds to point C of Figure 25. If the self-service library terminal 10 does not have a VCU, the microprocessor 60 at a block 2218 provides the screen display SCR-62 directing the patron to take the video to the circulation desk. Thereafter, program flow proceeds to point C of Figure 25.

The routine shown in Figure 27 is entered from the routine shown in Figure 25. When the routine shown in Figure 27 is entered, the microprocessor 60 determines an appropriate action. For example, if a video is pulled out of the video slot 30, program flow proceeds to point B of Figure 25, where the library patron is informed that the

self-service library terminal 10 is ready to process the next item.

5 If the microprocessor 60 determines that a video has been fully inserted into the video slot 30, the microprocessor 60 at a point 2300 determines whether an item identifier in the proper format is read from the video in the video slot 30. If an item identifier in the proper format is read from the video in the video slot 30, the microprocessor 60 determines whether the item identifier has already been processed. If the item identifier has not already been processed, program flow proceeds to point A of Figure 26. If the item identifier in the proper format has already been processed, the microprocessor 60 at a block 10 2302 causes the video to be resensitized, program flow proceeds to point B of Figure 26. In order to avoid erasing the data on the video, a lower intensity desensitizer should be used.

15 If an item identifier in the proper format is not read from the video in the video slot 30 before the maximum event timer T31 times out, the microprocessor 60 determines whether the count of the reposition counter R6 has exceeded the predetermined R6 threshold. If the count accumulated by the reposition counter R6 is greater than the predetermined R6 threshold, the microprocessor 60 at a block 20 2304 provides

the screen display SCR-39 informing the patron that the self-service library terminal 10 cannot read the item identifier from the video and directing the patron to take the video to the circulation desk. Thereafter, program flow proceeds to point C of Figure 25. On the other hand, if the count accumulated by the reposition counter R6 is less than the predetermined R6 threshold, the microprocessor 60 at a block 2306 provides the screen display SCR-85 directing the patron to reposition the video in the video slot 30. The microprocessor 60 also increments the count of the reposition counter R6 at a block 2308, and program flow then proceeds to point D of Figure 25.

If the maximum event timer T30 times out before the video is pulled out of the video slot 30 or the video is fully inserted into the video slot 30, the microprocessor 60 at a block 2310 provides the screen display SCR-42 instructing the patron to fully insert the video into the video slot 30. Thereafter, the microprocessor 60 functions in one of three ways. First, if the video is fully inserted into the video slot 30, program flow proceeds to the point 2300. Second, if the maximum event timer T32 times out before the video is pulled out of the video slot 30 or the video is fully inserted into the video slot 30, the microprocessor 60 at a block 2312 provides the screen display SCR-41 directing

5 the patron to take the video out of the video slot 30 and to try reinserting the video into the video slot 30. Thereafter, program flow proceeds to point C of Figure 25. Third, if the microprocessor 60 determines that the video has been pulled out of the video slot 30 before its item identifier has been read, program flow proceeds to point B of Figure 25.

10 The routine shown in Figure 28 is entered from Figures 20 and 21 if there is a printer error state. This error state may be entered when the printer 70 is out of paper or when the printer 70 otherwise needs servicing. If the printer 70 is in an error state, the microprocessor 60 at a block 2500 provides either a screen display SCR-76 informing the patron that the printer 70 is out of paper or
15 a screen display SCR-53 informing the patron that there is a general printer error, as appropriate. Alternatively, the self-service library terminal 10 may give the patron the option of proceeding with a checkout or checkin if, for example, the printer problem is merely that the printer 70
20 is out of paper. Thereafter, program flow returns to the particular block from which the routine shown in Figure 28 was invoked.

The routine shown in Figure 29 is entered from the routines shown in Figure 7, 9, 11, and 14. When this rou-

5 tine is entered, the microprocessor 60 determines whether to
display patron information (as may be determined by a soft-
ware switch). If not, program flow proceeds to point A of
Figure 15. If patron information is to be displayed, the
10 microprocessor at a block 2550 provides the screen display
SCR-57 informing the patron of the appropriate patron sta-
tus. Thereafter, the microprocessor 60 determines an appro-
priate action. For example, if a maximum event timer T36
times out before the patron presses a key on the keypad 32,
or if a library patron presses a key of the keypad 32 as
indicated by a block 2552, program flow proceeds to point A
of Figure 15.

15 Figure 30 shows how configuration data is prepared
using either the data server 50 or the self-check library
terminal 10. This configuration data includes, *inter alia*,
screen display layouts, text objects, receipt layouts,
receipt text, machine setup data, language selection data,
bar code filters, sends/selects, upgrades, diagnostics, host
20 interfaces, fonts, timer durations, and the like. The
screen display layouts, receipt layouts, and text objects
are configured using a personal computer 2600 (or, alterna-
tively, the self-service library terminal 10) running a
configuration program (labeled SAS in Figure 30). The
screen display layouts may be prepared as bit maps by a

screen display editor operating on the personal computer 2600 (or, alternatively, the self-service library terminal 10). These screen display bit maps may include the fonts used in the screen displays. Also, the screen display editor may present configuration screens to the user in order to aid the user in preparing the screen display layouts.

The screen display layouts and text are stored in a file 2602, and the receipt layouts and text are stored in a file 2604. The screen display layouts may be stored as bit maps in the file 2602. Message response text is typically configured for or by a library using a personal computer 2608 (or the personal computer 2600) running a configuration program (labeled LAV in Figure 30). The message response text may be stored along with the configuration data. The configuration data stored in the files 2602 and 2604, together with the message response text are then downloaded into the self-service library terminal 10 in order to configure this terminal.

Certain modifications of the present invention have been discussed above. Other modifications will occur to those practicing in the art of the present invention. For example, the data server 50 is described above as an apparatus on which configuration data can be generated, or a

self-service library terminal on which configuration data can be generated, or a gateway such that configuration data is generated on one of the other library terminals 52, 54, 56, 58, . . . n shown in Figure 2. Alternatively, the terminal 50 can be arranged to function as both a self-service library terminal and a gateway.

Also, as described above, the scan line projected by the reader 18 may be long and steady, long and flashing, short and steady, and short and flashing. However, the scan line projected by the reader 18 may be controlled so that it has different blink rates.

In addition, as described above, the microprocessor 60 provides a sad tone, a happy tone, and a walk-away tone through use of the audible transducer 40. The microprocessor 60 may also be arranged to control the audible transducer 40 so as to provide a tone indicating that the self-service library terminal 10 requires non-walk-away servicing, such as servicing because the printer 70 is out of paper.

Moreover, various maximum event timers have been described above such that, when they time out, program flow proceeds to a predetermined point in the program. As an interim step, however, the library patron may first be asked whether the patron needs additional time. If the patron

does not respond within a fixed amount of time, program flow proceeds to the predetermined point in the program. On the other hand, if the patron does respond within the fixed amount of time, the patron is given additional time before program flow proceeds to the predetermined point in the program. Also, the self-service library terminal 10 may be arranged to block the patron's library card if the patron does not respond within the patron's allotted time.

Furthermore, as described above, the microprocessor 60 is arranged to detect a printer error state. Likewise, the microprocessor 60 may be arranged to detect error states other than printer error states. For example, an error state may occur when the communication link 72 is down, or when the reader 18 or the reader 74 is out of service. In any of these error states, the library patron may be given the option of continuing or not continuing with a loan transaction, or the microprocessor 60 may be arranged to simply block the current loan transaction. If any part of the self-service library terminal 10 is out of service, the self-service library terminal 10 may be arranged to notify the patron which part is out of service.

Also, as described above, the cradle 14 is arranged to receive both a book and a CD. Instead, a separate

receiving area may be provided in the housing 12 for receiving CD's.

5 In addition, if the self-service library terminal 10 is enabled to process a chargeable loan, and if the patron agrees to the charge, the patron is allowed to proceed. However, if the patron does not agree to the charge, the patron is instructed to remove the circulating item and the patron is not permitted to continue with that circulating item. Instead, the self-service library terminal 10 may be arranged to allow the patron to continue checking out a circulating item even if the patron does not agree to pay a loan fee or fine. Similarly, the self-service library terminal 10 may be arranged to remind the patron of previous exacted fines and of other circulating items that the patron has on hold and that the patron has not yet checked out.

15 Moreover, as described above, the photoelectric sensors 20 and 22 are used to sense circulating items on the cradle 14. Instead, other types of proximity sensors may be used to sense circulating items on the cradle 14.

20 Furthermore, as described above, a library patron may choose one of three ways (the keypad 32, the reader 18, or the magnetic stripe reader 34) to enter the patron's identification. Instead, the library in which the self-service library terminal 10 is used may restrict the patron

to only one mode or may provide the patron with any number of identification modes greater than or less than three.

Also, more photoelectric sensors than the photoelectric sensors 20 and 22 may be used on the cradle 14.

5 Accordingly, the description of the present invention is to be construed as illustrative only and is for the purpose of teaching those skilled in the art the best mode of carrying out the invention. The details may be varied substantially without departing from the spirit of the
10 invention, and the exclusive use of all modifications which are within the scope of the appended claims is reserved.

WHAT IS CLAIMED IS:

1 1. A library terminal comprising:
2 an article receiving area arranged to receive an
3 article;
4 a code reader arranged to read a code on the arti-
5 cle when placed on the article receiving area; and,
6 a controller coupled to the code reader, wherein
7 the controller is arranged to control the code reader so as
8 to project a visible indicator onto the article receiving
9 area and so as to change the visible indicator between first
10 and second visible states, and wherein the controller is ar-
11 ranged to process a signal from the code reader correspond-
12 ing to the code read by the code reader.

1 2. The library terminal of claim 1 wherein one of
2 the first and second states is a blinking state.

1 3. The library terminal of claim 1 wherein one of
2 the first and second states is a steady state.

1 4. The library terminal of claim 1 wherein one of
2 the first and second states is an elongated length.

1 5. The library terminal of claim 1 wherein one of
2 the first and second states is a shortened length.

1 6. The library terminal of claim 1 wherein the
2 first state is a blinking state having a first rate of
3 blinking, wherein the second state is a blinking state
4 having a second rate of blinking, and wherein the first and
5 second rates of blinking are different.

1 7. The library terminal of claim 1 further com-
2 prising a proximity sensor arranged to sense proximity of a
3 user.

1 8. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader so as to
3 project the visible indicator in response to the proximity
4 sensor.

1 9. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader in re-
3 sponse to the proximity sensor so as to cause the visible
4 indicator to change to the first state, and wherein the
5 first state is a blinking state.

1 10. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader in re-
3 sponse to the proximity sensor so as to cause the visible
4 indicator to change to the first state, and wherein the
5 first state is a steady state.

1 11. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader in re-
3 sponse to the proximity sensor so as to cause the visible
4 indicator to change to the first state, and wherein the
5 first state is an elongated length.

1 12. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader in re-
3 sponse to the proximity sensor so as to cause the visible
4 indicator to change to the first state, and wherein the
5 first state is a shortened length.

1 13. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader in re-
3 sponse to the proximity sensor so as to cause the visible
4 indicator to change from the first state to the second
5 state, wherein the first state is a blinking state having a
6 first rate of blinking, wherein the second state is a blink-

7 ing state having a second rate of blinking, and wherein the
8 first and second rates of blinking are different.

1 14. The library terminal of claim 7 wherein the
2 controller is arranged to control the code reader in re-
3 sponse to the proximity sensor so as to change the visible
4 indicator from the first state to the second state..

1 15. The library terminal of claim 1 wherein the
2 code reader is arranged to read a code on a circulating
3 item.

1 16. The library terminal of claim 1 wherein the
2 code reader is arranged to read a code on an identification
3 card.

1 17. The library terminal of claim 1 wherein the
2 article receiving area has an idle indicator thereon read-
3 able by the code reader in order to determine whether an
4 article is placed in the article receiving area.

1 18. The library terminal of claim 1 wherein the
2 controller is arranged to process both loans and returns.

1 19. The library terminal of claim 1 further
2 comprising a monitor, a data storage memory, and a video
3 display memory, wherein the data storage memory stores
4 screen displays, and wherein the controller transfers the
5 screen displays from the data storage memory to the video
6 display memory for display on the monitor during interaction
7 with a borrower.

1 20. The library terminal of claim 1 further
2 comprising a connector, wherein the connector is arranged to
3 couple the library terminal over a link to a circulation
4 system, and wherein the controller is arranged to store loan
5 transactions during periods when the link to the circulation
6 system is down so that the loan transactions can be later
7 transferred to the circulation system.

1 21. The library terminal of claim 1 further
2 comprising a proximity sensor arranged to sense an article
3 placed on the article receiving area.

1 22. The library terminal of claim 1 wherein the
2 visible indicator indicates the correct position of the code
3 on the article placed on the article receiving area.

1 23. A library terminal comprising:
2 a display;
3 a transducer;
4 a code reader arranged to read a code on an arti-
5 cle involved in a loan transaction; and,
6 a controller coupled to the display, the transduc-
7 er, and the code reader, wherein the controller is arranged
8 to control the code reader so to as read the code on the
9 article, wherein the controller is arranged to control the
10 display so as to lead a user through the loan transaction,
11 and wherein the controller is arranged to control the trans-
12 ducer so as to provide an audible feedback having first and
1 second on-states depending upon operation of the library
14 terminal by the user.

1 24. The library terminal of claim 23 wherein the
2 controller is arranged to control the transducer so that the
3 first on-state indicates proper operation of the library
4 terminal by the user.

1 25. The library terminal of claim 23 wherein the
2 controller is arranged to control the transducer so that the
3 first on-state indicates improper operation of the library
4 terminal by the user.

1 26. The library terminal of claim 23 wherein the
2 controller is arranged to control the transducer so that the
3 first on-state of the audible feedback indicates improper
4 operation of the library terminal by the user, and wherein
5 the controller is arranged to control the transducer so that
6 the second on-state of the audible feedback indicates proper
7 operation of the library terminal by the user.

1 27. The library terminal of claim 23 wherein the
2 controller is arranged to control the transducer so that the
3 first on-state of the audible feedback indicates improper
4 operation of the library terminal by the user, and wherein
5 the controller is arranged to control the transducer so that
6 the second on-state of the audible feedback indicates that
7 the library terminal needs servicing.

1 28. The library terminal of claim 23 wherein the
2 controller is arranged to control the transducer so that the
3 first on-state of the audible feedback indicates proper
4 operation of the library terminal by the user, and wherein
5 the controller is arranged to control the transducer so that
6 the second on-state of the audible feedback indicates that
7 the library terminal needs servicing.

1 29. The library terminal of claim 23 wherein the
2 controller is arranged to control the transducer so as to
3 provide an audible feedback having a third on-state, wherein
4 the controller is arranged to control the transducer so that
5 the first on-state of the audible feedback indicates improp-
6 er operation of the library terminal by the user, wherein
7 the controller is arranged to control the transducer so that
8 the second on-state of the audible feedback indicates proper
9 operation of the library terminal by the user, and wherein
10 the controller is arranged to control the transducer so that
11 the third on-state of the audible feedback indicates that
12 the library terminal needs attention.

1 30. The library terminal of claim 23 wherein the
2 audible feedback is a first tone for the first on-state and
3 a second tone for the second on-state.

1 31. The library terminal of claim 23 wherein the
2 controller is arranged to control the display so as to
3 provide a visible feedback of the operation of the library
4 terminal by the user.

1 32. The library terminal of claim 23 further
2 comprising an article receiving area arranged to receive the
3 article, wherein the article receiving area has an idle
4 indicator thereon readable by the code reader in order to
5 determine whether an article is placed in the article re-
6 ceiving area.

1 33. The library terminal of claim 23 wherein the
2 controller is arranged to process both loans and returns.

1 34. The library terminal of claim 23 wherein the
2 library terminal is a self-service library terminal config-
3 ured for use by a borrower in order conduct self-service
4 loan transactions.

1 35. The library terminal of claim 23 further
2 comprising a connector, wherein the connector is arranged to
3 couple the library terminal over a link to a circulation
4 system, and wherein the controller is arranged to store loan
5 transactions during periods when the link to the circulation
6 system is down so that the loan transactions can be later
7 transferred to the circulation system.

1 36. The library terminal of claim 23 further
2 comprising an article receiving area, wherein the controller
3 is arranged to control the code reader so as to project a
4 visible indicator onto the article receiving area and so as
5 to change the visible indicator between first and second
6 visible states.

1 37. A self-service library terminal comprising:
2 an article receiving area arranged to receive an
3 article;

4 a code reader arranged to read a code on the arti-
5 cle when the article is placed on the article receiving
6 area; and,

7 a controller coupled to the code reader, wherein
8 the controller is arranged to process signals from the code
9 reader and to provide an explicit feedback to a borrower
10 when an article has an improper position on the article
11 receiving area.

1 38. The self-service library terminal of claim 37
2 wherein the article receiving area has an idle indicator,
3 and wherein the controller is arranged to process a signal
4 from the code reader corresponding to the idle indicator in
5 order to provide the explicit feedback as to whether an
6 article is placed in the article receiving area.

1 39. The self-service library terminal of claim 37
2 further comprising a security marker reader arranged to read
3 a security marker attached to a circulating item, wherein
4 the circulating item has a code thereon readable by the code
5 reader, and wherein the controller is arranged to process
6 signals from the code reader and the security marker reader
7 in order to provide the explicit feedback.

1 40. The self-service library terminal of claim 37
2 further comprising a security marker reader arranged to read
3 a security marker attached to a circulating item, wherein
4 the article receiving area has an idle indicator thereon
5 readable by the code reader in order to determine whether an
6 article is placed in the article receiving area, and wherein
7 the controller is arranged to process signals from the code
8 reader corresponding to the idle indicator, and from the

9 security marker reader corresponding to the security marker,
10 in order to provide the explicit feedback.

1 41. The self-service library terminal of claim 37
2 wherein the article receiving area has an idle indicator
3 thereon readable by the code reader in order to determine
4 whether an article is placed in the article receiving area.

1 42. The self-service library terminal of claim 41
2 wherein the idle indicator is a code.

1 43. The self-service library terminal of claim 37
2 wherein the controller is arranged to process both loans and
3 returns.

1 44. The self-service library terminal of claim 37
2 further comprising a display, a data storage memory, and a
3 display memory, wherein the data storage memory stores
4 screen displays, and wherein the controller transfers the
5 screen displays from the data storage memory to the display
6 memory for display during interaction with a borrower.

1 45. The self-service library terminal of claim 37
2 further comprising a connector, wherein the connector is
3 arranged to couple the self-service library terminal over a
4 link to a circulation system, and wherein the controller is
5 arranged to store loan transactions during periods when the
6 link to the circulation system is down so that the loan
7 transactions can be later transferred to the circulation
8 system.

1 46. The self-service library terminal of claim 37
2 wherein the article receiving area includes a user card
3 receiving area having a card idle indicator, and wherein the
4 controller is arranged to direct a user to correctly posi-
5 tion a user card on user card receiving area if the control-
6 ler detects that the card idle indicator is not being read
7 by the code reader.

1 47. The self-service library terminal of claim 37
2 wherein the controller determines that a library card is not
3 correctly placed in the article receiving area when the code
4 reader reads an article other than the library card before
5 the code reader reads the library card.

1 48. The self-service library terminal of claim 37
2 wherein the article receiving area includes a position
3 sensor, and wherein the controller is responsive to the code
4 reader and the position sensor in order to provide the
5 explicit feedback when a circulating item is not in a refer-
6 ence position.

1 49. The self-service library terminal of claim 48
2 wherein the controller is arranged to direct a user to
3 properly position an article when the code reader reads the
4 code but the controller determines that the article is not
5 properly positioned against a back wall of the article
6 receiving area based upon the position sensor.

1 50. The self-service library terminal of claim 37
2 wherein the article receiving area is a first article re-
3 ceiving area arranged to receive an article of a first type,
4 wherein the self-service library terminal further comprises
5 a second article receiving area arranged to receive an
6 article of a second type, and wherein the controller is
7 arranged to direct a user to properly place the article of
8 the second type at the second article receiving area if the
9 controller determines that the article of the second type is
10 improperly placed at the first article receiving area.

1 51. The self-service library terminal of claim 50
2 wherein the article of the first type has a first type code,
3 wherein the article of the second type has a second type
4 code, and wherein the controller is arranged to direct a
5 user to place the article of the second type at the second
6 article receiving area if the controller determines that the
7 code reader reads the second type code when the article of
8 the second type is at the first article receiving area.

1 52. The self-service library terminal of claim 37
2 wherein circulating items have first type codes, and wherein
3 the controller is arranged to direct a user to place one of
4 the circulating items at the article receiving area if the
5 code reader reads a second type code from an article at the
6 article receiving area.

1 53. The self-service library terminal of claim 37
2 wherein the controller is arranged to notify a user that the
3 article has been previously processed if the code reader
4 twice reads the code from the article before the article is
5 returned by the user.

1 54. The self-service library terminal of claim 37
2 wherein a circulating item has first and second codes there-
3 on, and wherein the controller is arranged to direct a user
4 to place the first code in a reference position where the
5 first code can be read by the code reader if the controller
6 determines that a user has placed the second code in the
7 reference position.

1 55. The self-service library terminal of claim 37
2 wherein the controller is arranged to provide a notice if a
3 user is conducting a transaction but the controller detects
4 no activity for a predetermined amount of time.

1 56. The self-service library terminal of claim 55
2 wherein the notice directs the clearing of the self-service
3 library terminal.

1 57. The self-service library terminal of claim 55
2 wherein the notice requests the user to indicate whether the
3 user needs more time.

1 58. The self-service library terminal of claim 37
2 wherein the user has a loan card, and wherein the controller
3 is arranged to block the user's loan card if the user is
4 conducting a transaction but the controller detects no
5 activity for a predetermined amount of time.

1 59. The self-service library terminal of claim 58
2 wherein the explicit feedback is an indication that the
3 self-service library terminal must be reset before it can be
4 used again.

1 60. The self-service library terminal of claim 58
2 wherein the explicit feedback is an audible tone alert to
3 indicate that the self-service library terminal needs atten-
4 tion.

1 61. The self-service library terminal of claim 37
2 wherein the controller is arranged to detect an error state,
3 and wherein the controller is arranged to notify a user that
4 the user may elect to continue a transaction upon detection
5 of the error state.

1 62. The self-service library terminal of claim 61
2 further comprising a printer, and wherein the error state is
3 the printer being out of paper.

1 63. The self-service library terminal of claim 61
2 further comprising a printer, and wherein the error state is
3 the printer being out of service.

1 64. The self-service library terminal of claim 61
2 wherein the error state is a failure of a communication
3 link.

1 65. The self-service library terminal of claim 37
2 wherein the controller is arranged to detect an error state,
3 and wherein the controller is arranged to block the transac-
4 tion upon detection of the error state.

1 66. The self-service library terminal of claim 65
2 wherein the error state is the code reader being out of
3 service.

1 67. The self-service library terminal of claim 65
2 wherein the error state is a first error state, wherein the
3 controller is arranged to detect a second error state, and
4 wherein the controller is arranged to notify a user that the
5 user may elect to continue a transaction upon detection of
6 the first error state.

1 68. The self-service library terminal of claim 67
2 further comprising a printer, and wherein the first error
3 state is the printer being out of paper.

1 69. The self-service library terminal of claim 67
2 further comprising a printer, and wherein the first error
3 state is the printer being out of service.

1 70. The self-service library terminal of claim 67
2 wherein the first error state is a failure of a communica-
3 tion link.

1 71. The self-service library terminal of claim 67
2 wherein the second error state is the code reader being out
3 of service.

1 72. The self-service library terminal of claim 37
2 wherein the controller is arranged to control the code
3 reader so as to project a visible indicator onto the article
4 receiving area and so as to change the visible indicator
5 between first and second visible states.

1 73. The self-service library terminal of claim 37
2 wherein the controller is arranged to direct the borrower to
3 re-position the article.

1 74. The self-service library terminal of claim 37
2 further comprising a display device, wherein the controller
3 is arranged to control the display device in order to lead
4 the borrower through processing of a loan transaction,
5 wherein the controller is arranged to detect an error in the
6 processing of the loan transaction, and wherein the control-
7 ler is arranged to control the display device in order to
8 display an action for helping the borrower to correct the
9 error.

1 75. The self-service library terminal of claim 37
2 wherein the controller is arranged to direct the borrower to
3 replace a circulating item involved in a loan transaction if
4 the borrower removes an identification card from the article
5 receiving area before placing the circulating item in a
6 position to be read by the code reader.

1 76. The self-service library terminal of claim 37
2 wherein, if a loan transaction is rejected with respect to
3 the borrower, the controller is arranged to inform the
4 borrower of the reason for the rejection.

1 77. The self-service library terminal of claim 37
2 wherein, if the borrower positions anything other than an
3 identification card in a reading position with respect to
4 the code reader before an identification card is positioned
5 so that the identification card can be read by the code
6 reader, the controller is arranged to direct the borrower to
7 first place the identification card in the reading position
8 with respect to the code reader.

1 78. The self-service library terminal of claim 37
2 wherein, if data is incorrectly entered by the borrower, the
3 controller is arranged to direct the borrower to retry entry
4 of the data.

1 79. The self-service library terminal of claim 37
2 wherein, if a circulating item has already been checked out
3 by the borrower during a current transaction, and if the
4 borrower attempts to check out the circulating item again,
5 the controller is arranged to inform the borrower that the
6 borrower has already checked out the circulating item.

1 80. The self-service library terminal of claim 37
2 further comprising a video receiver, wherein, if the borrow-
3 er leaves a circulating item in a position to be read by the
4 code reader while inserting a video into the video receiver,
5 the controller is arranged to direct the borrower to remove
6 the circulating item before inserting the video.

1 81. The self-service library terminal of claim 37
2 wherein, if the borrower places multiple articles together
3 in the article receiving area, the controller is arranged to
4 direct the borrower to place articles one at a time in the
5 article receiving area.

1 82. The self-service library terminal of claim 37
2 wherein, if any part of the self-service library terminal is
3 out of service, the controller is arranged to inform the
4 borrower as to which part of the self-service library termi-
5 nal is out of service.

1 83. A method of preparing configuration data for
2 multiple self-service library terminals and of storing the
3 configuration data in data storage memories of the multiple
4 self-service library terminals, wherein the multiple self-
5 service library terminals are configured by the configura-
6 tion data to interact with users during loan transactions,
7 the method comprising the following steps:

8 a) preparing the configuration data on an admin-
9 istration terminal; and,

10 b) transferring the configuration data from the
11 administration terminal to the data storage memories of the
12 multiple self-service library terminals.

1 84. The method of claim 83 wherein at least a
2 first of the self-service library terminals has a video
3 display memory, and wherein the method further comprises the
4 steps of:

5 c) preparing bit maps representing screen dis-
6 plays;

7 d) storing the bit maps in the data storage
8 memory of the first self-service library terminal; and,

9 e) transferring the bit maps from the data stor-
10 age memory of the first self-service library terminal to the
11 video display memory during interaction with at least one of
12 the users.

1 85. The method of claim 84 wherein step c) com-
2 prises the step of preparing the bit maps by use of a screen
3 display editor which is separate from the first self-service
4 library terminal.

1 86. The method of claim 84 wherein step c) com-
2 prises the step of preparing the bit maps by use of a screen
3 display editor which is part of the first self-service
4 library terminal.

1 87. The method of claim 84 wherein step e) com-
2 prises the step of transferring the bit maps from the data
3 storage memory to the video display memory in order to
4 render fonts.

1 88. The method of claim 83 further comprising the
2 step of reading a code on an article placed on an article
3 receiving area of one of the self-service library terminals.

1 89. The method of claim 88 wherein the step of
2 reading a code comprises the step of reading a code on a
3 circulating item.

1 90. The method of claim 88 wherein the step of
2 reading a code comprises the step of reading a code on an
3 identification card.

1 91. The method of claim 88 wherein the step of
2 reading a code comprises the step of reading an idle indica-
3 tor on the article receiving area in order to determine
4 whether an article is placed in the article receiving area.

1 92. The method of claim 83 further comprising the
2 step of sensing proximity of the borrower.

1 93. The method of claim 83 further comprising the
2 step of presenting the configuration data in screen displays
3 to a user so as to lead the user through configuration of
4 the self-service library terminal.

1 94. The method of claim 83 wherein the step of
2 transferring the configuration data from the administration
3 terminal to the data storage memories of the multiple self-
4 service library terminals comprises the following steps:

5 transferring the configuration data from the
6 administration terminal to a first self-service library
7 terminal; and,

8 transferring the configuration data from the first
9 self-service library terminal to a second self-service li-
10 brary terminal.

1 95. The method of claim 83 wherein the adminis-
2 tration terminal is one of the self-service library termi-
3 nals.

1 96. The method of claim 83 wherein the step of
2 transferring the configuration data from the administration
3 terminal to the data storage memories of the multiple self-
4 service library terminals comprises the following steps:

5 transferring the configuration data from a first
6 self-service library terminal to a second self-service
7 library terminal; and,

8 transferring the configuration data from the
9 second self-service library terminal to a third self-service
10 library terminal.

1 97. The method of claim 83 wherein the configura-
2 tion data includes bit maps.

1 98. The method of claim 97 wherein the bit maps
2 comprise first and second sets of bit maps representing
3 screen displays in corresponding first and second different
4 languages.

1 99. The method of claim 83 wherein the configura-
2 tion data pertain to machine setup data.

1 100. The method of claim 83 wherein the configu-
2 ration data pertain to language selection data.

1 101. The method of claim 83 wherein the configu-
2 ration data pertain to bar code filters.

1 102. The method of claim 83 wherein the configu-
2 ration data pertain to layout of receipts.

1 103. The method of claim 83 wherein the configu-
2 ration data pertain to sends/selects.

1 104. The method of claim 83 wherein the configu-
2 ration data pertain to upgrades.

1 105. The method of claim 83 wherein the configu-
2 ration data pertain to diagnostics.

1 106. The method of claim 83 wherein the configu-
2 ration data pertain to communication diagnostics.

1 107. The method of claim 83 wherein the configu-
2 ration data pertain to a host interface.

1 108. The method of claim 83 further comprising
2 the steps of projecting visible indicators onto article re-
3 ceiving areas of the multiple self-service library terminals
4 and changing the visible indicator between first and second
5 visible states.

1 109. A library terminal comprising:
2 a monitor;
3 a data storage memory storing screen displays,
4 wherein the screen displays include fonts; and,
5 a controller, wherein the controller is arranged
6 to control the display of the screen displays, including the
7 fonts, on the monitor without performing font rendering from
8 fonts stored separately from the screen displays.

1 110. The library terminal of claim 109 further
2 comprising an article receiving area arranged to receive an
3 article, and a code reader arranged to read a code on the
4 article when placed on the article receiving area, wherein
5 the controller is arranged to process a signal from the code
6 reader corresponding to the code read by the code reader.

1 111. The library terminal of claim 110 wherein
2 the article is a circulating item.

1 112. The library terminal of claim 110 wherein
2 the article is an identification card.

1 113. The library terminal of claim 110 wherein
2 the article receiving area has an idle indicator thereon
3 readable by the code reader in order to determine whether an
4 article is placed in the article receiving area.

1 114. The library terminal of claim 109 further
2 comprising a proximity sensor arranged to sense proximity of
3 a borrower.

1 115. The library terminal of claim 109 further
2 comprising a connector, wherein the connector is arranged to
3 couple the library terminal over a link to a circulation
4 system, and wherein the controller is arranged to store loan
5 transactions during periods when the link to the circulation
6 system is down so that the loan transactions can be later
7 transferred to the circulation system.

1 116. The library terminal of claim 109 wherein
2 the controller is arranged to control a code reader so as to
3 project a visible indicator onto an article receiving area
4 and so as to change the visible indicator between first and
5 second visible states.

1 117. A library terminal comprising:
2 a housing;
3 an item receiving area incorporated in the hous-
4 ing, wherein the item receiving area is arranged to receive
5 a circulating item;

6 a video receiving area incorporated in the hous-
7 ing, wherein the video receiver area is arranged to receive
8 a video;

9 a reader supported by the housing and arranged to
10 read the circulating item and the video when the circulating
11 item is placed in the item receiving area and when the video
12 is placed in the video receiving area; and,

13 a controller, wherein the controller is contained
14 with the housing, and wherein the controller is coupled to
15 the reader.

1 118. The library terminal of claim 117 wherein
2 reader comprises:

3 a bar code reader supported by the housing and ar-
4 ranged to read a bar code on the circulating item when the
5 circulating item is placed in the item receiving area; and,

6 a video reader supported by the housing and ar-
7 ranged to read the video when the video is placed in the
8 video receiving area.

1 119. The library terminal of claim 117 wherein
2 the video receiving area is within the housing, and wherein
3 the housing has an opening so that a video may be inserted
4 into the video receiving area.

1 120. The library terminal of claim 117 further
2 comprising a magnetic stripe reader, wherein the magnetic
3 stripe reader is contained with the housing, wherein the
4 housing has an opening, wherein the opening is arranged to
5 permit access to the magnetic stripe reader from outside of
6 the housing, and wherein the controller is coupled to the
7 magnetic stripe reader.

1 121. The library terminal of claim 117 further
2 comprising a printer, wherein the printer is contained with
3 the housing, wherein the housing has an opening, wherein the
4 opening is arranged to permit access from outside of the
5 housing, wherein the printer is arranged to print a document
6 and to present the document through the opening to a bor-
7 rower, and wherein the controller is coupled to the printer.

1 122. The library terminal of claim 117 further
2 comprising a display, wherein the display is contained
3 within the housing so that the display is viewable by a
4 user, and wherein the controller is arranged to control the
5 display in order to display screen displays to the user.

1 123. The library terminal of claim 117 further
2 comprising a proximity sensor, wherein the proximity sensor
3 is supported by the housing so that the proximity sensor is
4 arranged to sense proximity of a user.

1 124. The library terminal of claim 117 wherein
2 the item receiving area has an idle bar code thereon read-
3 able by the reader in order to determine whether a circu-
4 lating item is placed in the item receiving area.

1 125. The library terminal of claim 117 wherein
2 the controller is arranged to process both loans and re-
3 turns.

1 126. The library terminal of claim 117 further
2 comprising a transducer, wherein the transducer is supported
3 by the housing so that the transducer is arranged to provide
4 an audible feedback of the operation of the library terminal
5 by a user.

1 127. The library terminal of claim 117 further
2 comprising a security marker reader, wherein the security
3 marker reader is contained within the housing adjacent to
4 the item receiving area, and wherein the security marker
5 reader is arranged to read a security marker attached to the
6 circulating item.

1 128. The library terminal of claim 117 further
2 comprising a keypad, wherein the keypad is supported by the
3 housing so that the keypad is arranged to interact with a
4 user during returns and loans.

1 129. The library terminal of claim 117 further
2 comprising a CD receiver, wherein the CD receiver is con-
3 tained within the housing, and wherein the housing has an
4 opening so that a CD may be inserted into the CD receiver
5 and may be read during a loan transaction.

1 130. The library terminal of claim 117 further
2 comprising a connector, wherein the connector is arranged to
3 couple the library terminal over a link to a circulation
4 system, and wherein the controller is arranged to store loan
5 transactions during periods when the link to the circulation
6 system is down so that the loan transactions can be later
7 transferred to the circulation system.

1 131. The library terminal of claim 117 wherein
2 the controller is arranged to control the code reader so as
3 to project a visible indicator onto at least one of the item
4 receiving area and the video receiving area and so as to
5 change the visible indicator between first and second visi-
6 ble states.

1 132. A self-service library terminal comprising:
2 a reader arranged to read identifications on arti-
3 cles involved in library loan transactions; and,
4 a controller, wherein the controller is arranged
5 to process signals from the reader corresponding to the
6 identifications read by the reader, and wherein the control-
7 ler is arranged to process financial credit transactions
8 related to the library loan transactions and to remind a
9 borrower of the borrower's account status.

1 133. The self-service library terminal of claim
2 132 further comprising a display, wherein the controller is
3 arranged to control the display in order to remind the
4 borrower that a loan is a chargeable loan.

1 134. The self-service library terminal of claim
2 133 wherein the controller is arranged to control the dis-
3 play in order to request that the borrower pay a fee for the
4 chargeable loan.

1 135. The self-service library terminal of claim
2 133 wherein the controller is arranged to control the dis-
3 play in order to request that the borrower pay a fee for the
4 chargeable loan upon return of the article.

1 136. The self-service library terminal of claim
2 133 wherein the display is a monitor.

1 137. The self-service library terminal of claim
2 133 wherein the display is a printer.

1 138. The self-service library terminal of claim
2 132 further comprising a display, wherein the controller is
3 arranged to control the display in order to remind the
4 borrower of an overdue article chargeable to the borrower.

1 139. The self-service library terminal of claim
2 138 wherein the controller is arranged to control the dis-
3 play in order to remind the borrower to pay immediately for
4 the overdue article.

1 140. The self-service library terminal of claim
2 138 wherein the controller is arranged to allow the borrower
3 to continue a present loan transaction even though the
4 borrower has not paid for overdue article.

1 141. The self-service library terminal of claim
2 138 wherein the controller is arranged to give the borrower
3 the option of continuing a present loan transaction even
4 though the borrower has not paid for an overdue article or
5 of paying immediately for the overdue article.

1 142. The self-service library terminal of claim
2 132 further comprising a display, wherein the controller is
3 arranged to control the display in order to remind the
4 borrower of a hold reserved for the borrower.

1 143. The self-service library terminal of claim
2 132 further comprising a display, wherein the controller is
3 arranged to control the display in order to remind the
4 borrower of a fine owed by the borrower.

1 144. The self-service library terminal of claim
2 132 further comprising a collection device, wherein the
3 controller is arranged to interact with the collection
4 device in order to collect a fine or a fee from the borrow-
5 er.

1 145. The self-service library terminal of claim
2 144 wherein the collection device is a credit card reader.

1 146. The self-service library terminal of claim
2 144 wherein the collection device is a debit card reader.

1 147. The self-service library terminal of claim
2 144 wherein the collection device is a smart card reader.

1 148. The self-service library terminal of claim
2 144 wherein the collection device is a cash receiver.

1 149. The self-service library terminal of claim
2 132 further comprising a connector, wherein the connector is
3 arranged to couple the self-service library terminal over a
4 link to a circulation system, and wherein the controller is
5 arranged to store loan transactions during periods when the
6 link to the circulation system is down so that the loan
7 transactions can be later transferred to the circulation
8 system.

1 150. The self-service library terminal of claim
2 132 further comprising a display, wherein the controller is
3 arranged to control the display in order to remind the
4 borrower of a new charge.

1 151. The self-service library terminal of claim
2 150 wherein the controller is arranged to control the dis-
3 play in order to remind the borrower that the borrower can
4 accept or reject the new charge.

1 152. The self-service library terminal of claim
2 132 further comprising an article receiving area, wherein
3 the controller is arranged to control the reader so as to
4 project a visible indicator onto the article receiving area
5 and so as to change the visible indicator between first and
6 second visible states.

1 153. An arrangement comprising a self-service
2 library terminal, a circulation system, and a communication
3 link, wherein the communication link couples the self-ser-
4 vice library terminal to the circulation system, wherein the
5 self-service library terminal has a controller arranged to
6 process a loan transaction of a borrower of a circulating
7 item, wherein the controller stores the loan transaction
8 during a period when the communication link between the
9 self-service library terminal and the circulation system is
10 down, and wherein the controller transfers the stored loan
11 transaction from the self-service library terminal to the
12 circulation system during a period when the communication

13 link between the self-service library terminal and the
14 circulation system is not down.

1 154. The arrangement of claim 153 wherein the
2 self-service library terminal comprises an article receiving
3 area and a scanner, wherein the controller is arranged to
4 control the scanner so as to project a visible indicator
5 onto the article receiving area and so as to change the
6 visible indicator between first and second visible states.

1 155. A library terminal comprising:
2 a card receiving area arranged to receive a li-
3 brary card;
4 a card reader arranged to read the library card
5 when the library card is placed on the card receiving area;
6 and,
7 a controller coupled to the card reader, wherein
8 the controller is responsive to the card reader in order to
9 determine incorrect library card placement on the card re-
10 ceiving area.

1 156. The library terminal of claim 155 wherein
2 the card receiving area has an idle indicator, and wherein
3 the controller determines that the library card is incor-
4 rectly placed on the card receiving area when the card
5 reader fails to read the library card and the idle indica-
6 tor.

1 157. The library terminal of claim 155 wherein
2 the controller determines incorrect library card placement
3 when the card reader reads an article other than the library
4 card before the card reader reads the library card.

1 158. The library terminal of claim 155 wherein
2 the controller is arranged to control the card reader so as
3 to project a visible indicator onto the card receiving area
4 and so as to change the visible indicator between first and
5 second visible states.

1 159. A library terminal comprising:
2 a circulating item receiving area arranged to
3 receive a circulating item;
4 a scanner arranged to scan the circulating item
5 when the circulating item is placed on the circulating item
6 receiving area; and,

7 a controller coupled to the scanner, wherein the
8 controller is responsive to the scanner in order to deter-
9 mine when the circulating item is in the circulating item
10 receiving area but is not in a reference position.

1 160. The library terminal of claim 159 further
2 comprising an indicator, wherein the controller controls the
3 indicator to provide feedback that the circulating item is
4 not in the reference position.

1 161. The library terminal of claim 159 further
2 comprising a security marker reader arranged to read a
3 security marker attached to the circulating item, and where-
4 in the controller is arranged to control a sensing range of
5 the security marker reader when the circulating item is in
6 the circulating item receiving area but is not in a refer-
7 ence position.

1 162. The library terminal of claim 159 further
2 comprising an item proximity sensor, and wherein the con-
3 troller is responsive to the scanner and the item proximity
4 sensor in order to determine when the circulating item is in
5 the circulating item receiving area but is not in the refer-
6 ence position.

1 163. The library terminal of claim 162 further
2 comprising a back wall of the circulating item receiving
3 area, wherein the item proximity sensor is positioned to
4 detect when the circulating item is not against the back
5 wall, and wherein the reference position is against the back
6 wall.

1 164. The library terminal of claim 159 further
2 comprising first and second item proximity sensors, and
3 wherein the controller is responsive to the scanner and the
4 first and second item proximity sensors in order to deter-
5 mine when the circulating item is in the circulating item
6 receiving area but is not in the reference position.

1 165. The library terminal of claim 164 further
2 comprising a back wall of the circulating item receiving
3 area, wherein the first and second item proximity sensors
4 are positioned to detect when the circulating item is not
5 against the back wall, and wherein the reference position is
6 against the back wall.

1 166. The library terminal of claim 164 further
2 comprising a back wall of the circulating item receiving
3 area, and wherein the first and second item proximity sen-
4 sors are positioned to detect when the circulating item is
5 skewed with respect to the back wall.

1 167. The library terminal of claim 159 wherein
2 the controller is arranged to control the scanner so as to
3 project a visible indicator onto the circulating item re-
4 ceiving area and so as to change the visible indicator
5 between first and second visible states.

1 168. A library terminal comprising:

2 a first circulating item receiving area arranged
3 to receive a first circulating item of a first type;

4 a first scanner arranged to read the first circu-
5 lating item when the first circulating item is placed in the
6 first circulating item receiving area;

7 a second circulating item receiving area arranged
8 to receive a second circulating item of a second type,
9 wherein the first and second types are different;

10 a second scanner arranged to read the second
11 circulating item when the second circulating item is placed
12 in the second circulating item receiving area; and,

13 a controller coupled to the first and second
14 scanners, wherein the controller is responsive to the first
15 scanner in order to determine when the second circulating
16 item is placed on the first circulating item receiving area.

1 169. The library terminal of claim 168 wherein
2 the first scanner is a bar code scanner.

1 170. The library terminal of claim 168 wherein
2 the first scanner is a dimension scanner.

1 171. The library terminal of claim 168 wherein
2 the first circulating item is a book and the second circu-
3 lating item is a video.

1 172. The library terminal of claim 168 wherein
2 the first circulating item is a book and the second circu-
3 lating item is a CD.

1 173. The library terminal of claim 168 further
2 comprising a security marker state setter arranged to set a
3 state of a security marker attached to a circulating item,
4 and wherein the controller is arranged to inhibit the secu-
5 rity marker state setter when the controller determines that
6 the second circulating item is placed on the first circulat-
7 ing item receiving area.

1 174. The library terminal of claim 173 wherein
2 the state is a desensitized state.

1 175. The library terminal of claim 173 wherein
the state is a sensitized state.

1 176. The library terminal of claim 168 wherein
2 the controller is arranged to control one of the first and
3 second scanners so as to project a visible indicator onto a
4 corresponding one of the first and second circulating item
5 receiving areas and so as to change the visible indicator
6 between first and second visible states.

1 177. A self-service library terminal comprising a
2 controller and a display, wherein the controller is arranged
3 to detect an error state of the self-service library termi-
4 nal and, while the self-service library terminal is in the
5 error state, to notify a user through use of the display
6 that the user may continue a transaction at the option of
7 the user.

1 178. The self-service library terminal of claim
2 177 wherein the controller is arranged to detect first and
3 second error states, wherein the controller is arranged to
4 notify a user that the user may elect to continue a transac-
5 tion upon detection of the first error state, and wherein
6 the controller is arranged to block the transaction upon
7 detection of the second error state.

1 179. The self-service library terminal of claim
2 177 further comprising a printer, and wherein the error
3 state is the printer being out of paper.

1 180. The self-service library terminal of claim
2 177 further comprising a printer, and wherein the error
3 state is the printer being out of service.

1 181. The self-service library terminal of claim
2 177 wherein the error state is a failure of a communication
3 link.

1 182. The self-service library terminal of claim
2 177 further comprising an article receiving area and a
3 scanner, wherein the controller is arranged to control the
4 scanner so as to project a visible indicator onto the arti-
5 cle receiving area and so as to change the visible indicator
6 between first and second visible states.

ABSTRACT OF THE DISCLOSURE

5 A library terminal permits a user to execute a
loan transaction without assistance. The library termi-
nal(i) provides a visible scan line from a bar code reader
10 indicating the correct positioning of the bar code on a
circulating item, (ii) leads a user through a loan transac-
tion, (iii) provides an explicit feedback to a user when an
article has an improper position on the article receiving
area, (iv) both checks out and checks in circulating items,
15 (v) stores fonts in bit maps of screen displays instead of
in a separate font memory, (vi) integrates a security marker
reader, a printer, and a controller in the same housing,
(vii) processes financial transactions related to the bor-
rowing of circulating items, and/or (viii) displays actions
for helping the user to correct errors in use of the termi-
nal.

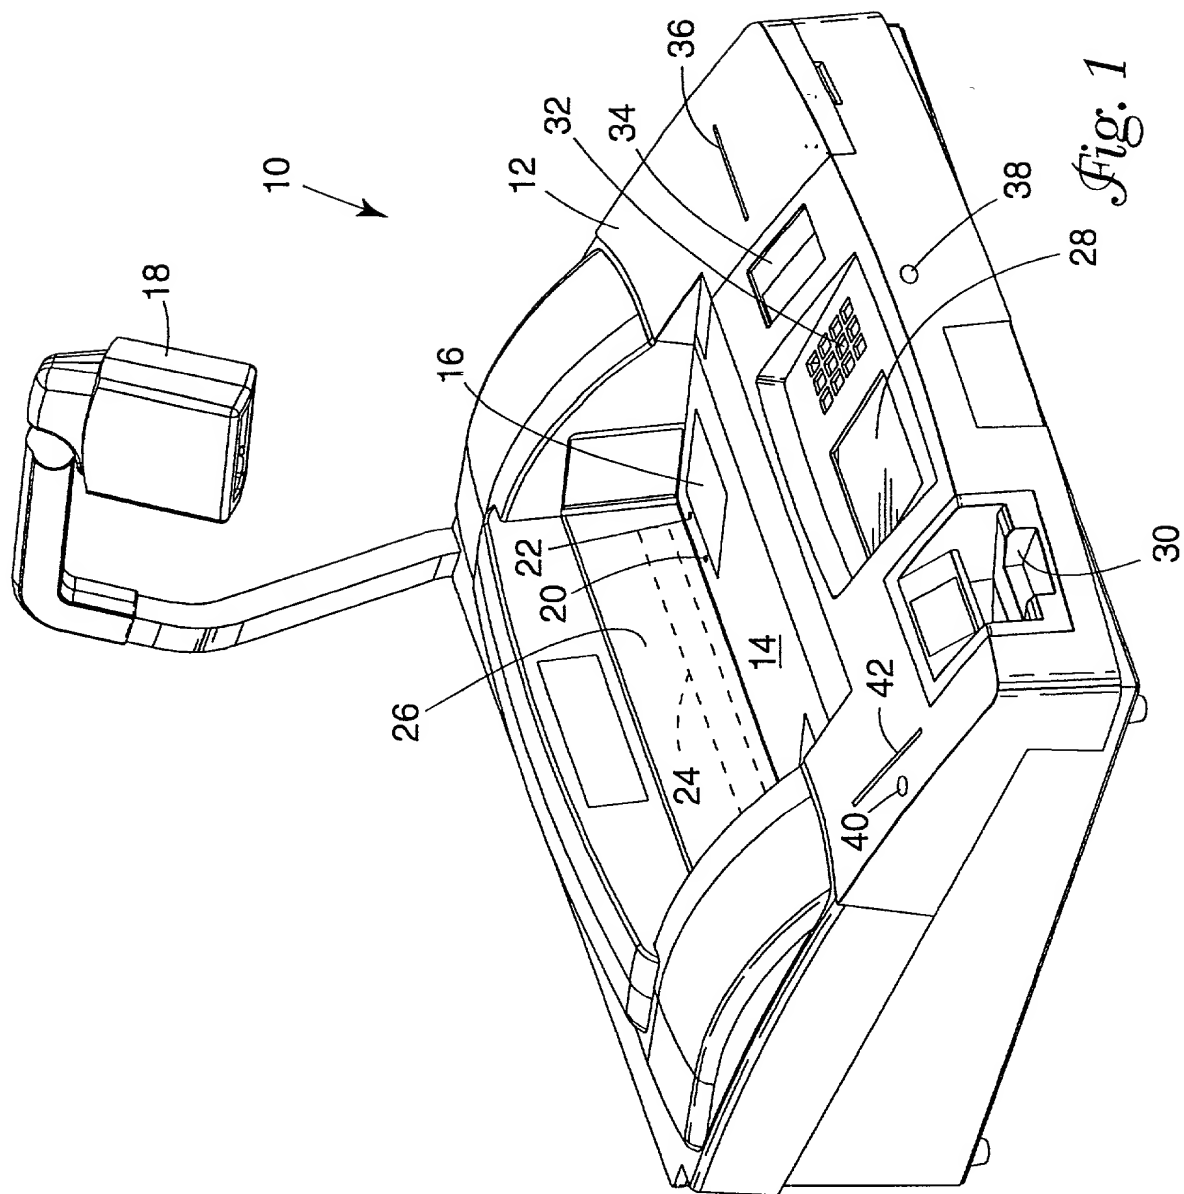


Fig. 1

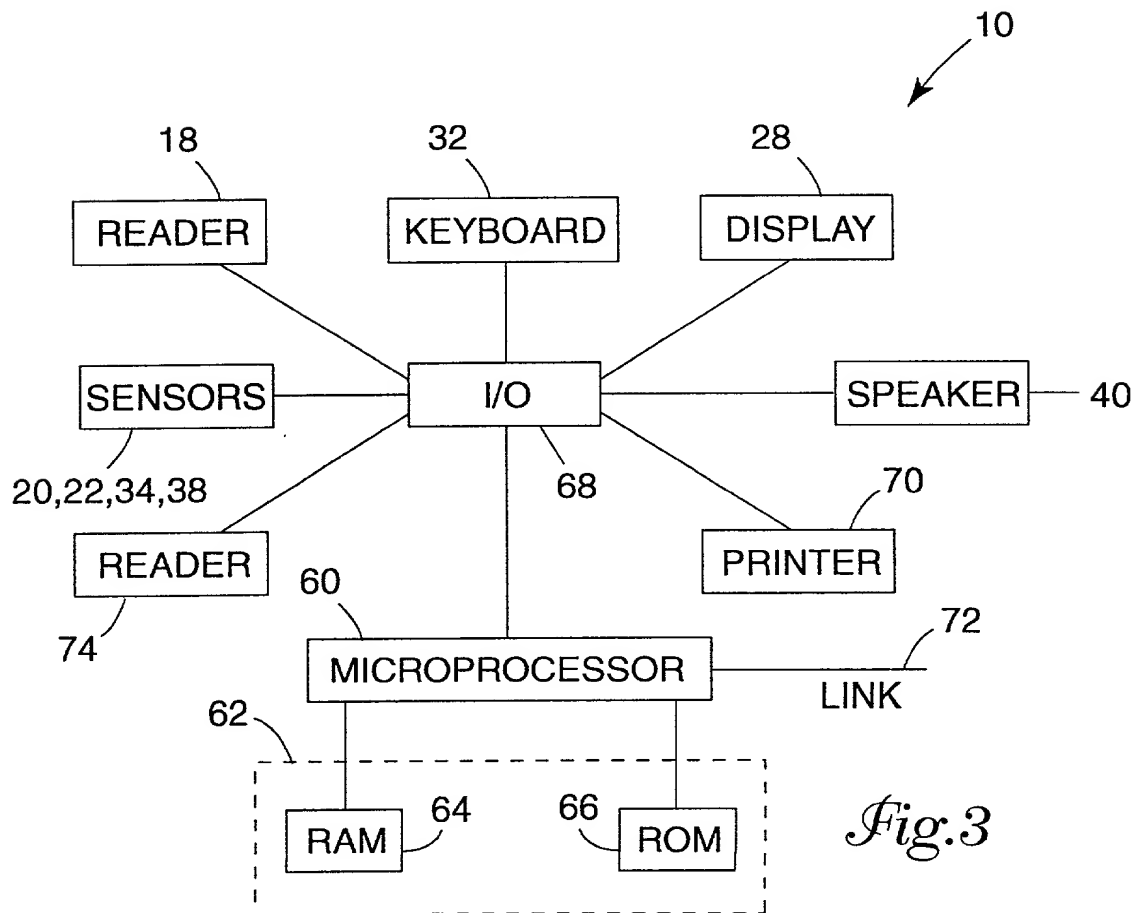
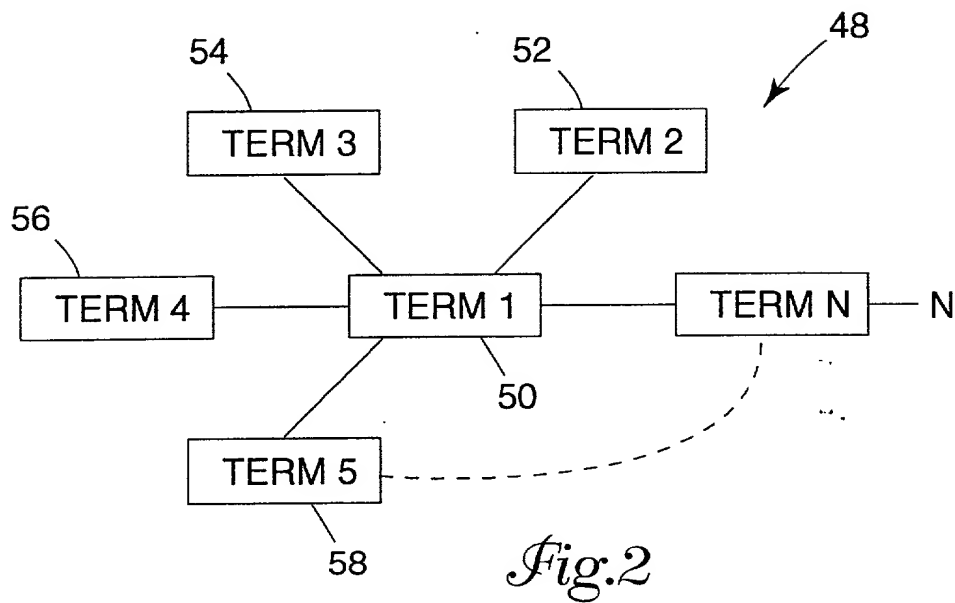


Figure 1

Welcome Single Language - Checkout

Initial screen (screen saver) instructs user to press any key to begin.

If patron places card directly in the holder, or swipes a mag card, continue with Card Logic

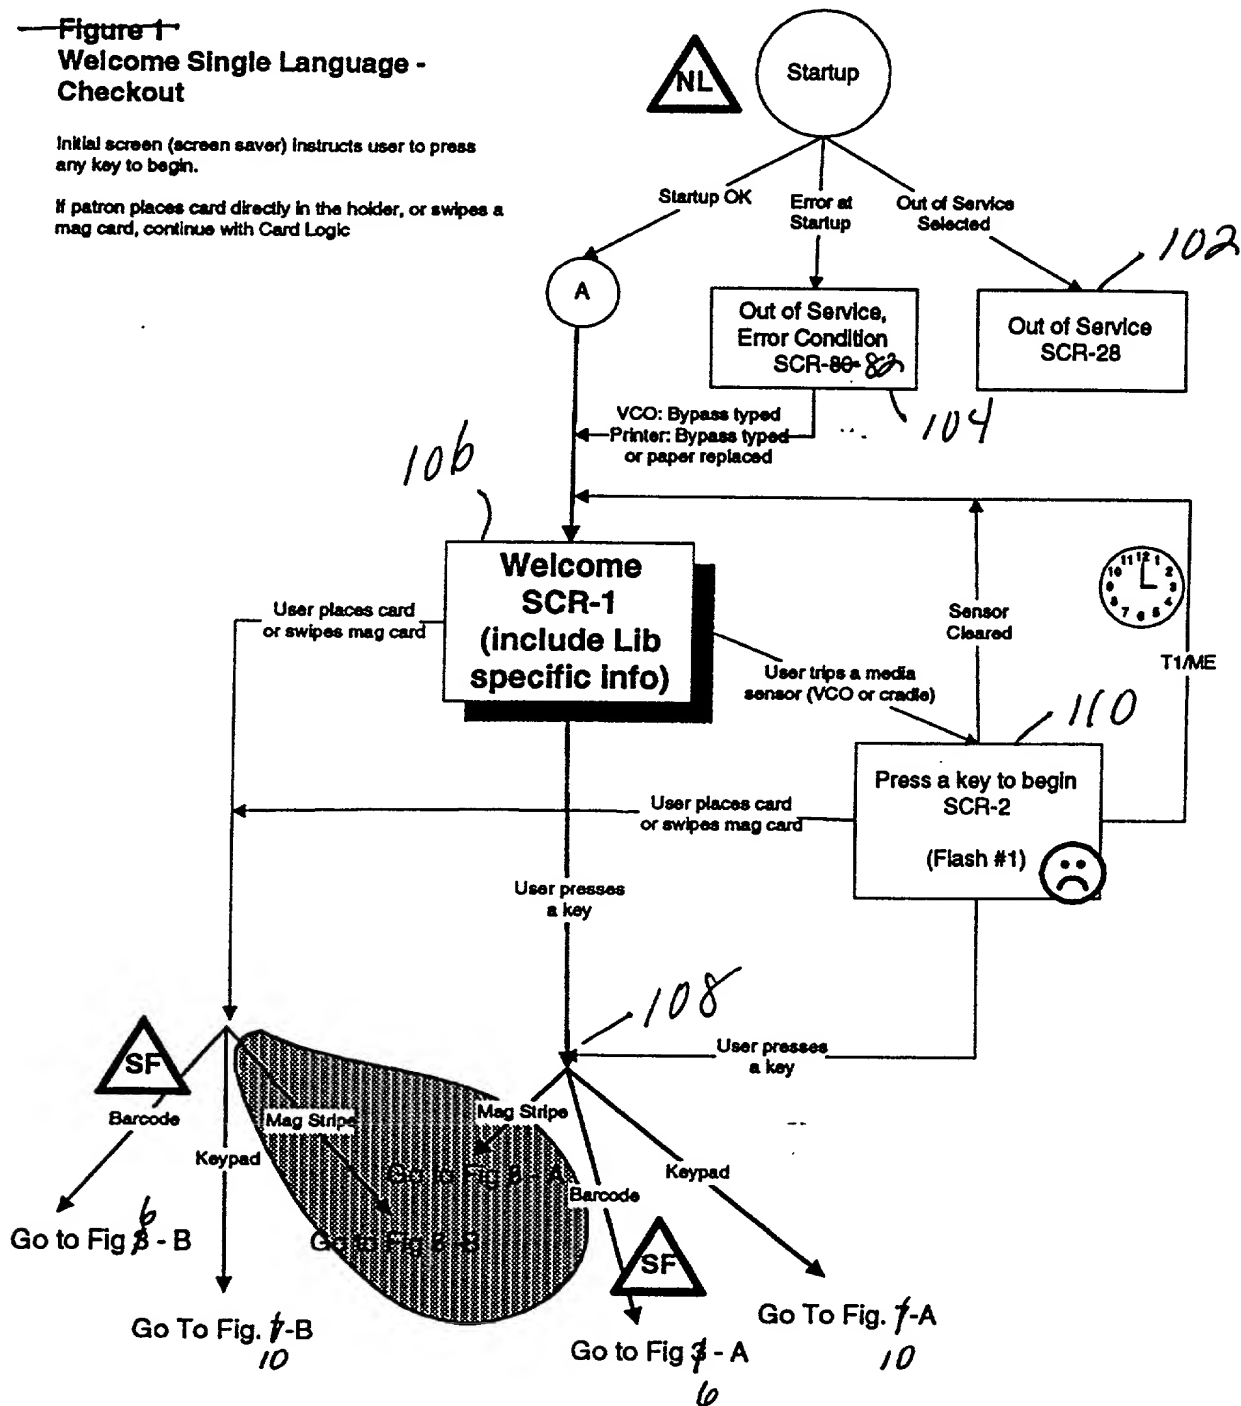


Figure 1 - Welcome Single Language Checkout

FIGURE 4

Figure 2
Welcome Multiple Language

Checkin or Checkout Configured
Initial screen (screen saver) instructs user to press a key
corresponding to their language.
Users may NOT proceed until a language is selected.

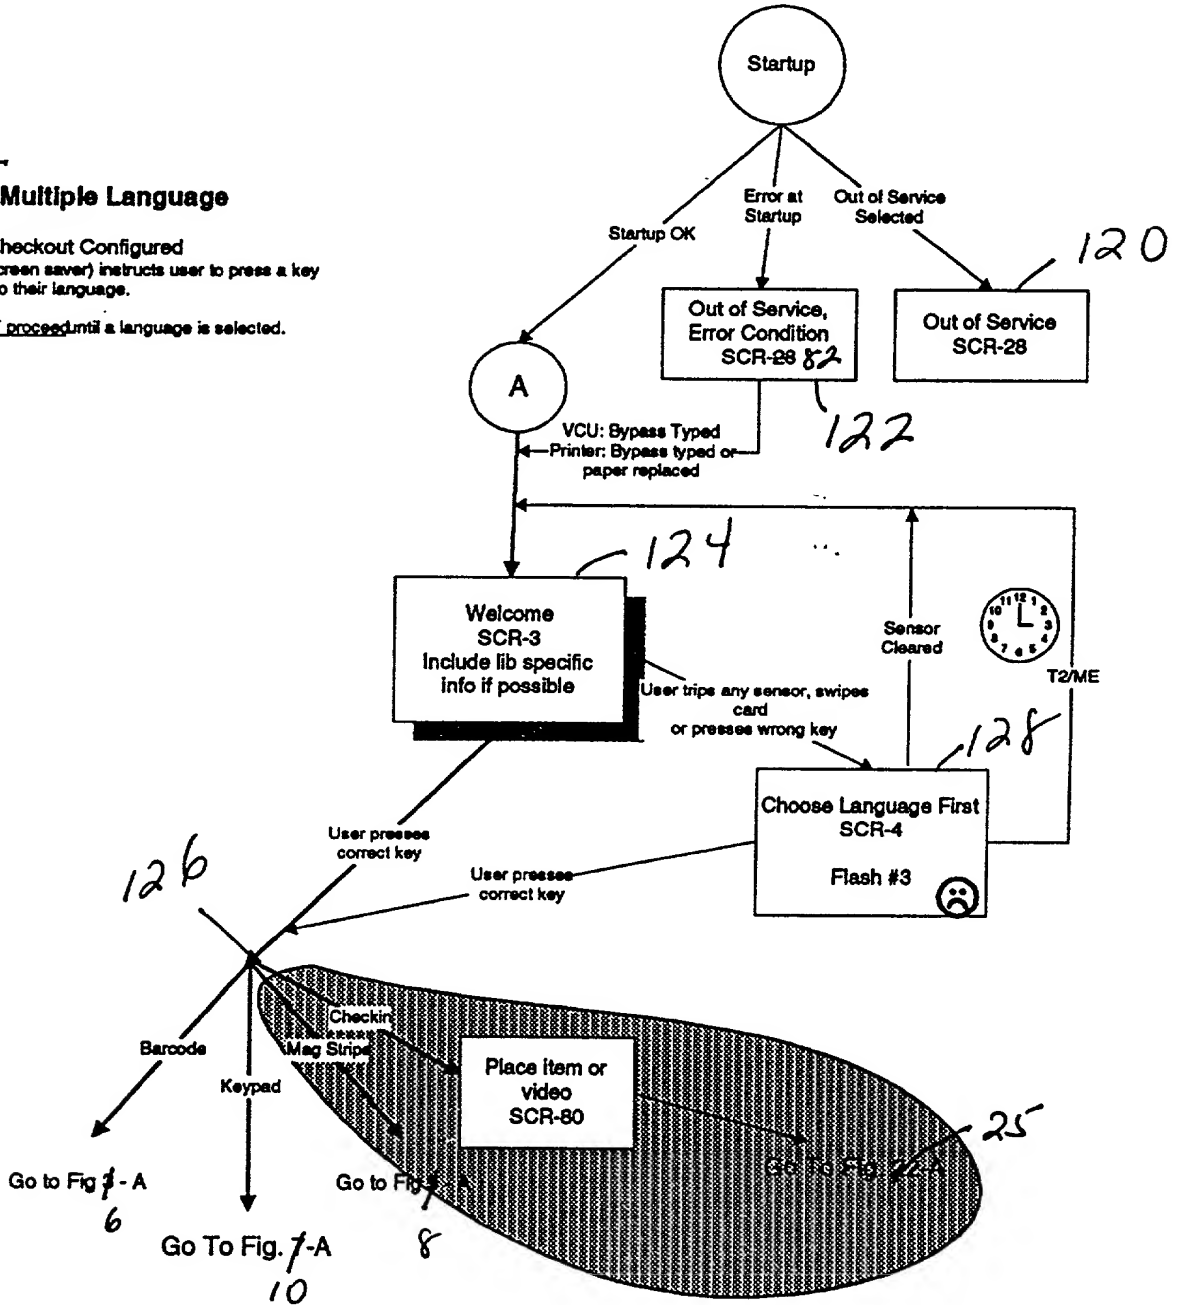


FIGURE 5

Figure 2 - Welcome Multiple Language - Checkin/Checkout

This section handles card scanning the patron id

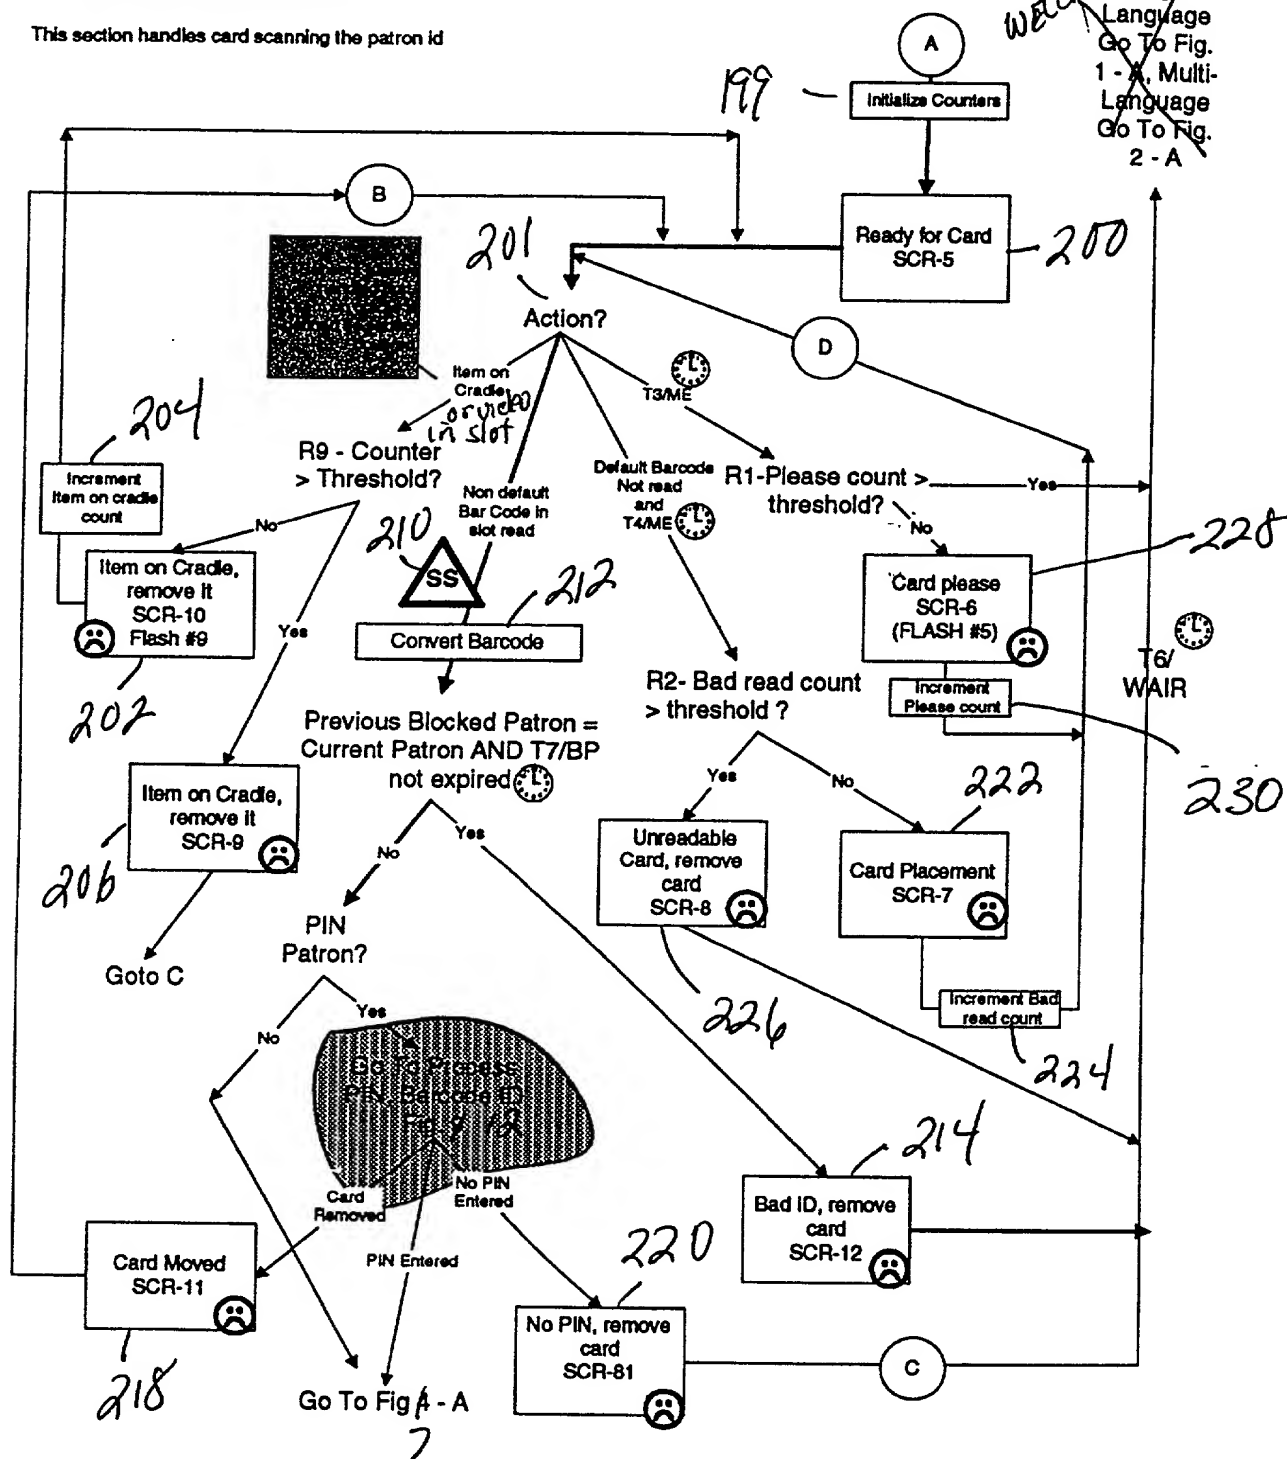


Figure 3 - Process Barcode Patron ID

FIGURE 6

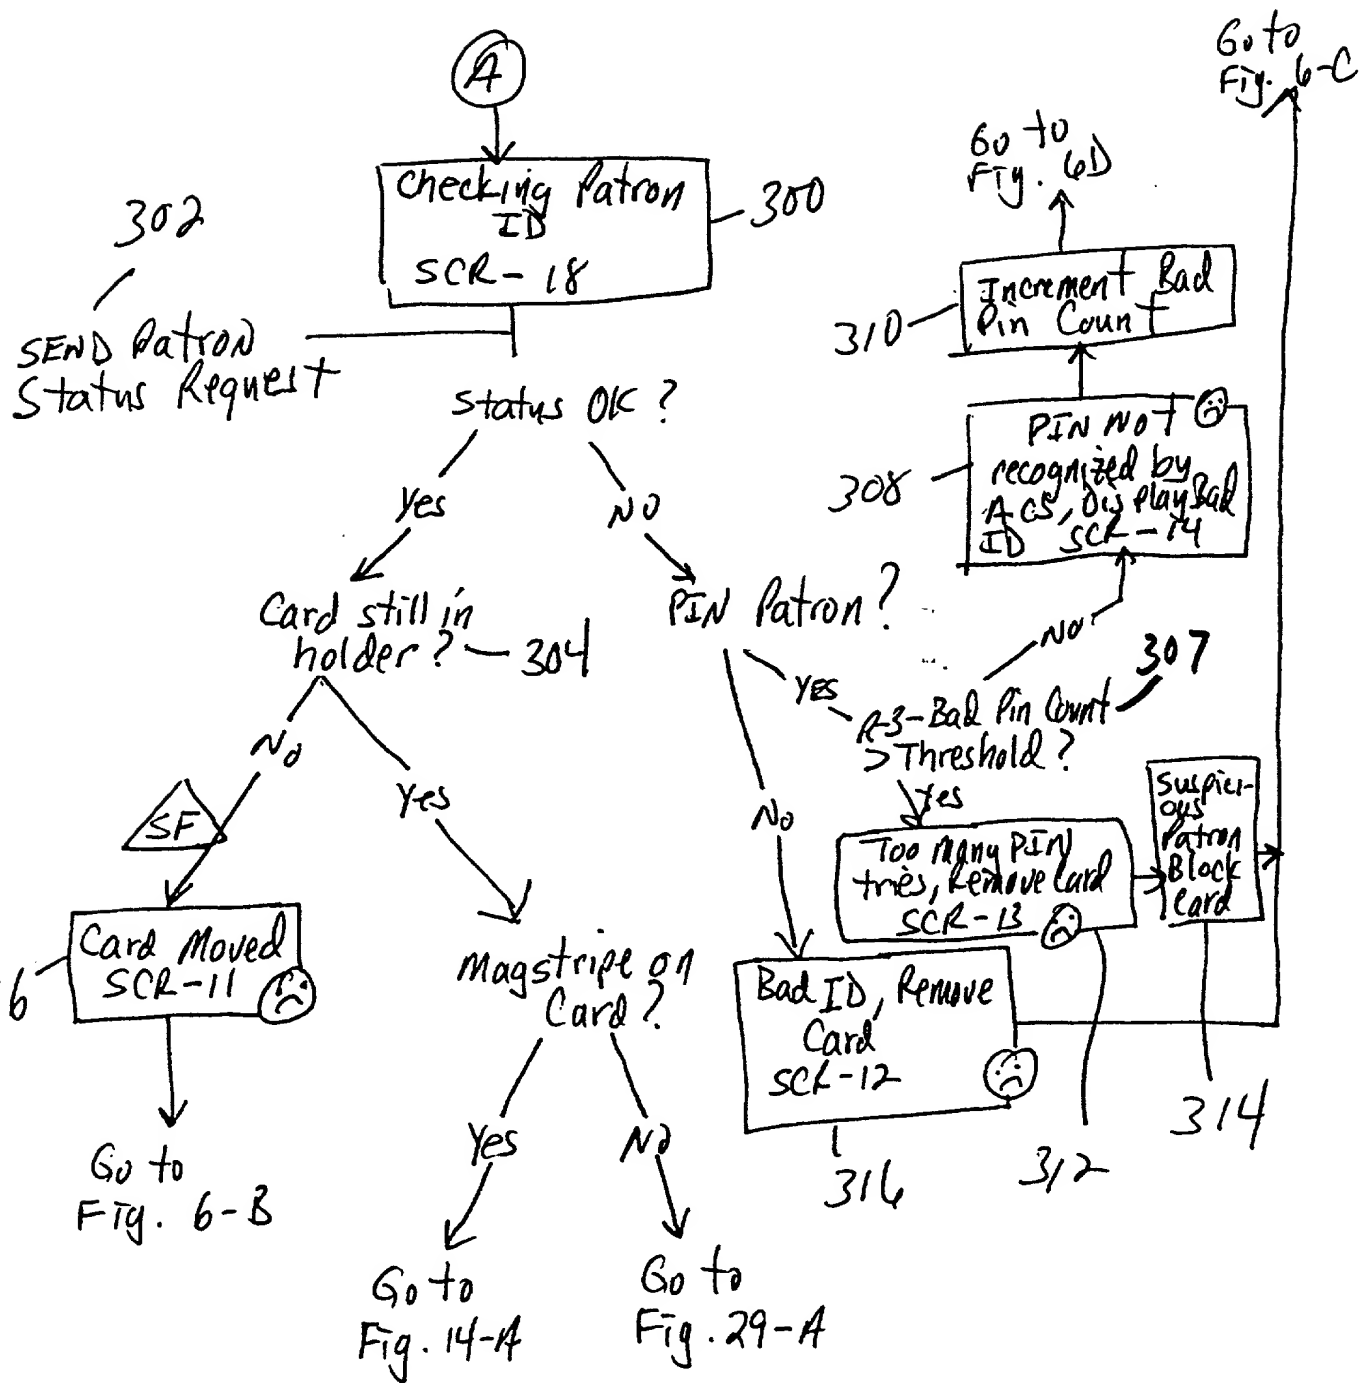


FIGURE 7

~~Figure 5~~
Process Mag Swipe Patron ID

This diagram only handles the swipe method of reading the card. Other methods will require changes to this logic.

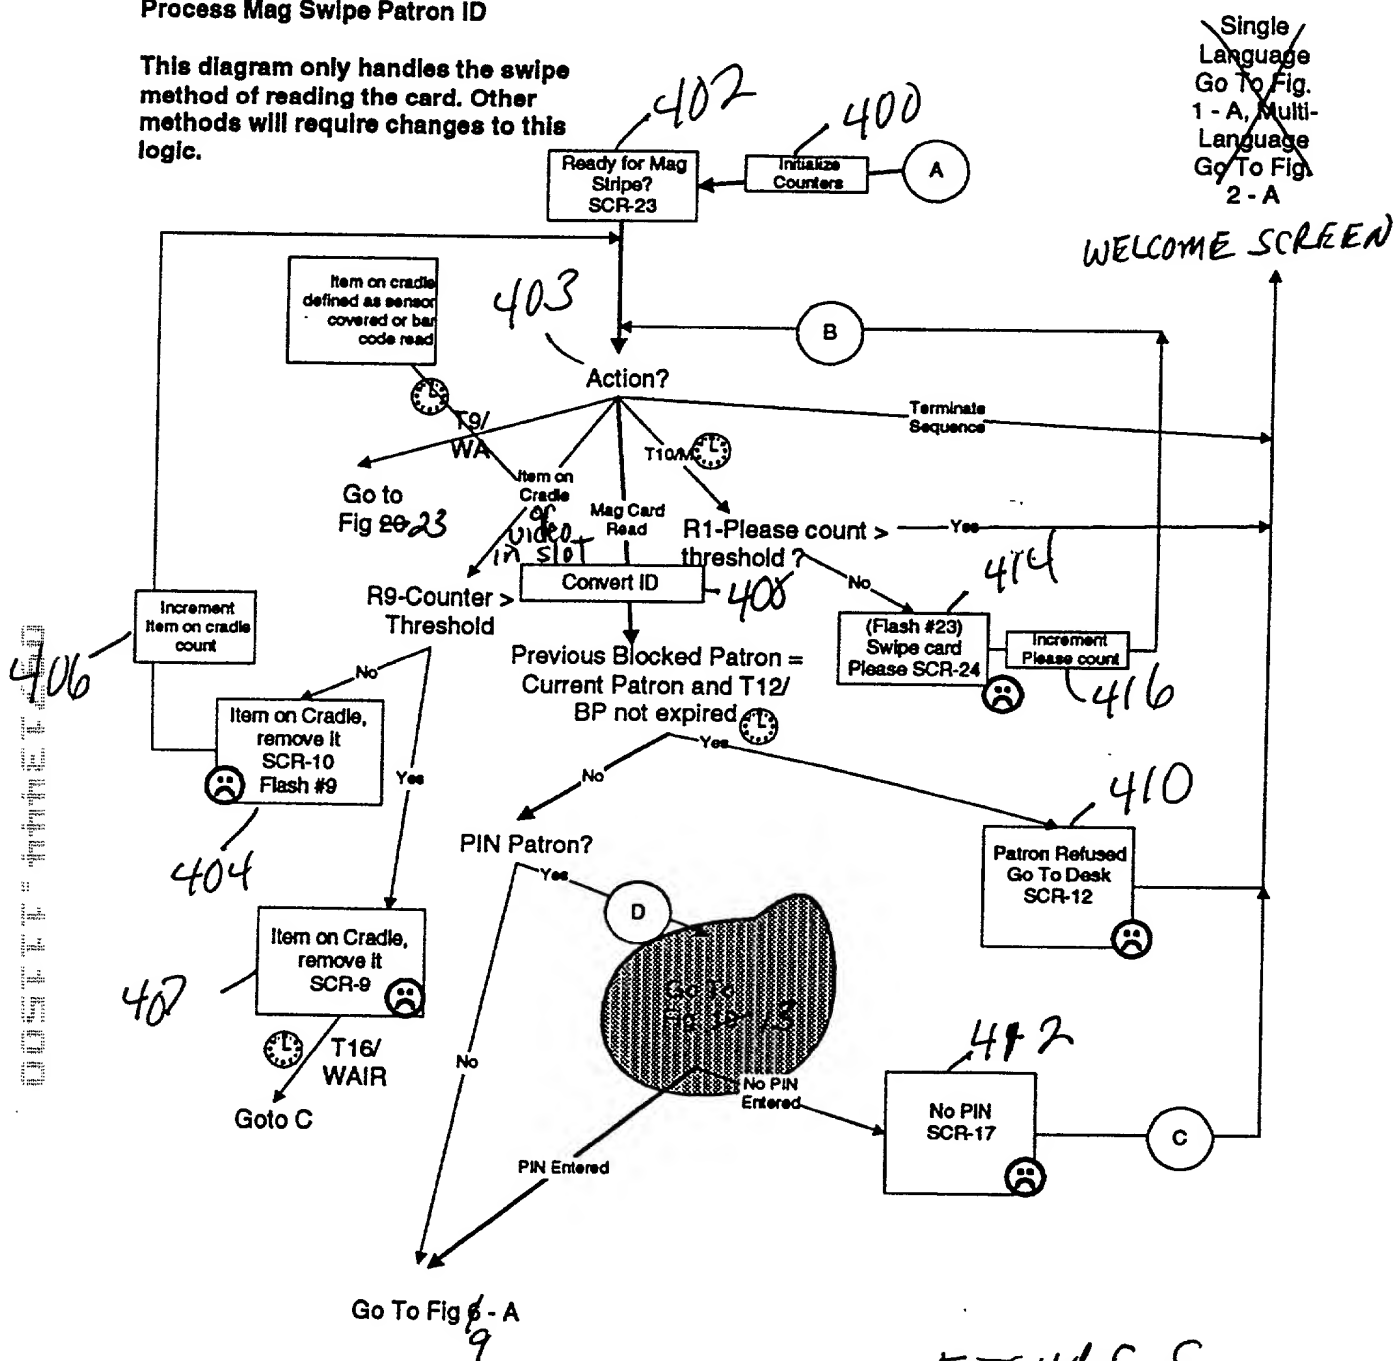


Figure 5 - Process Mag Swipe Patron ID

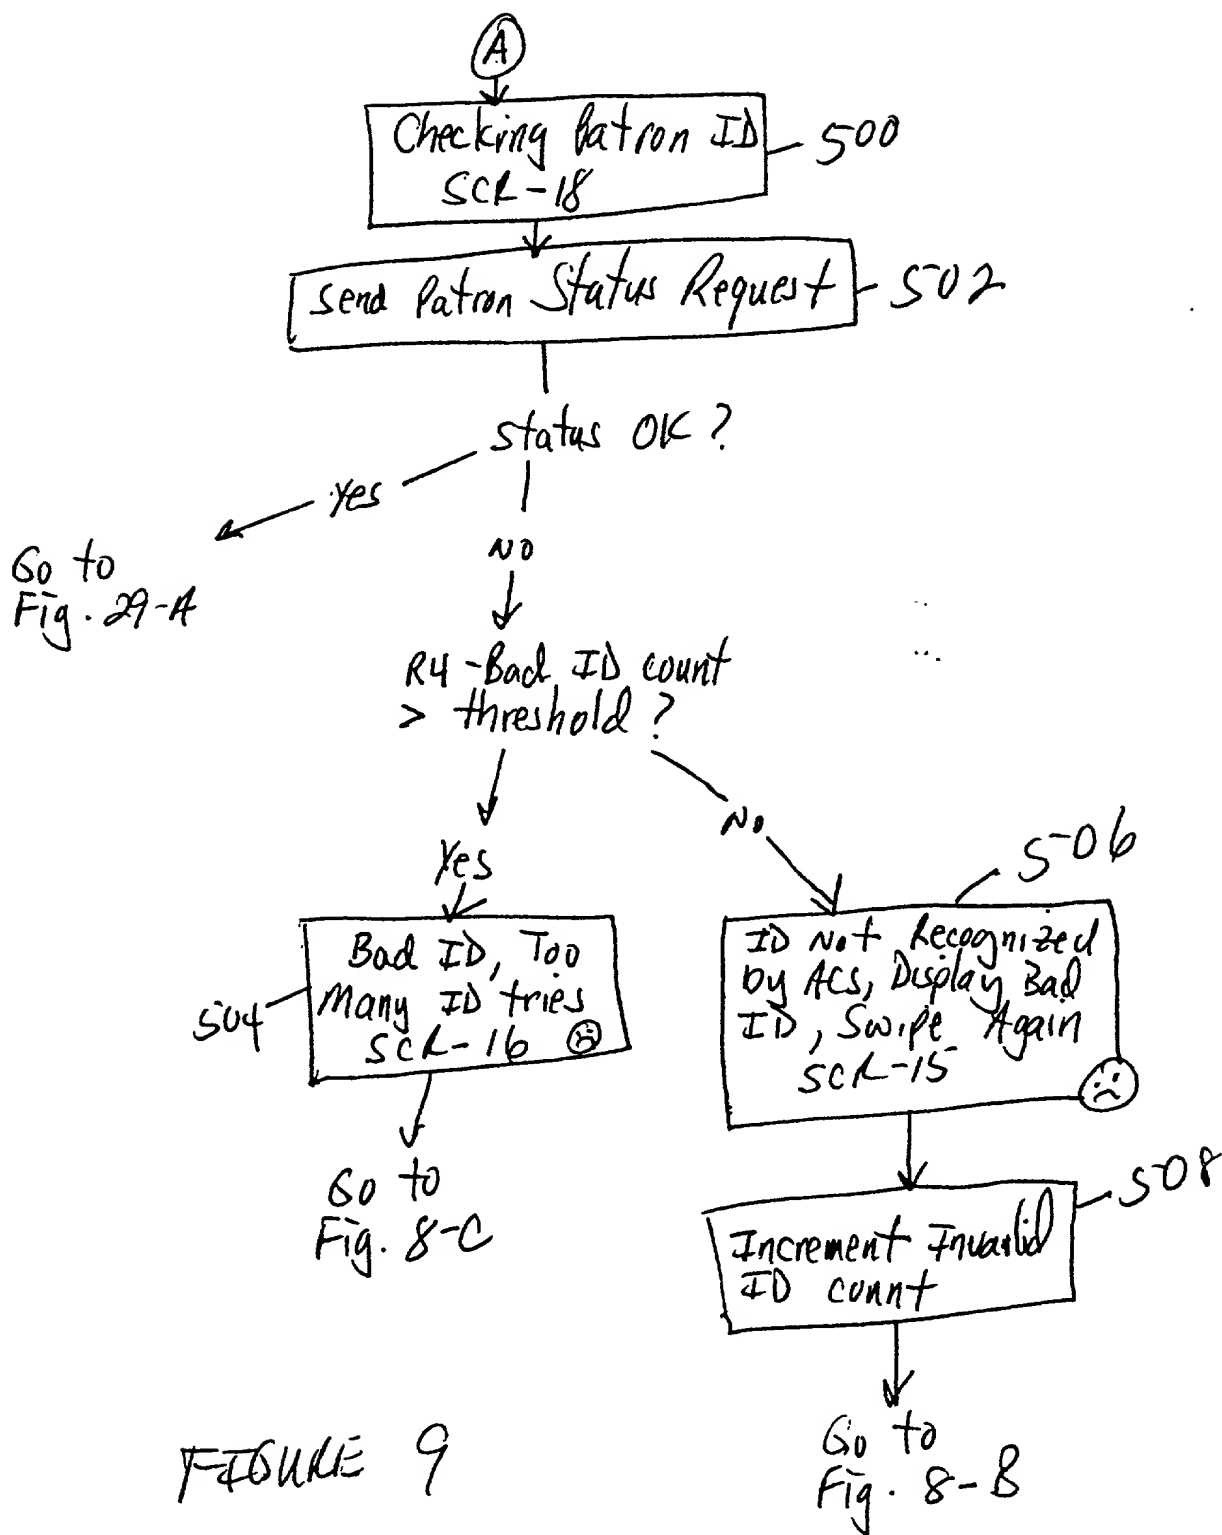


Figure 7
Process Keypad Patron ID

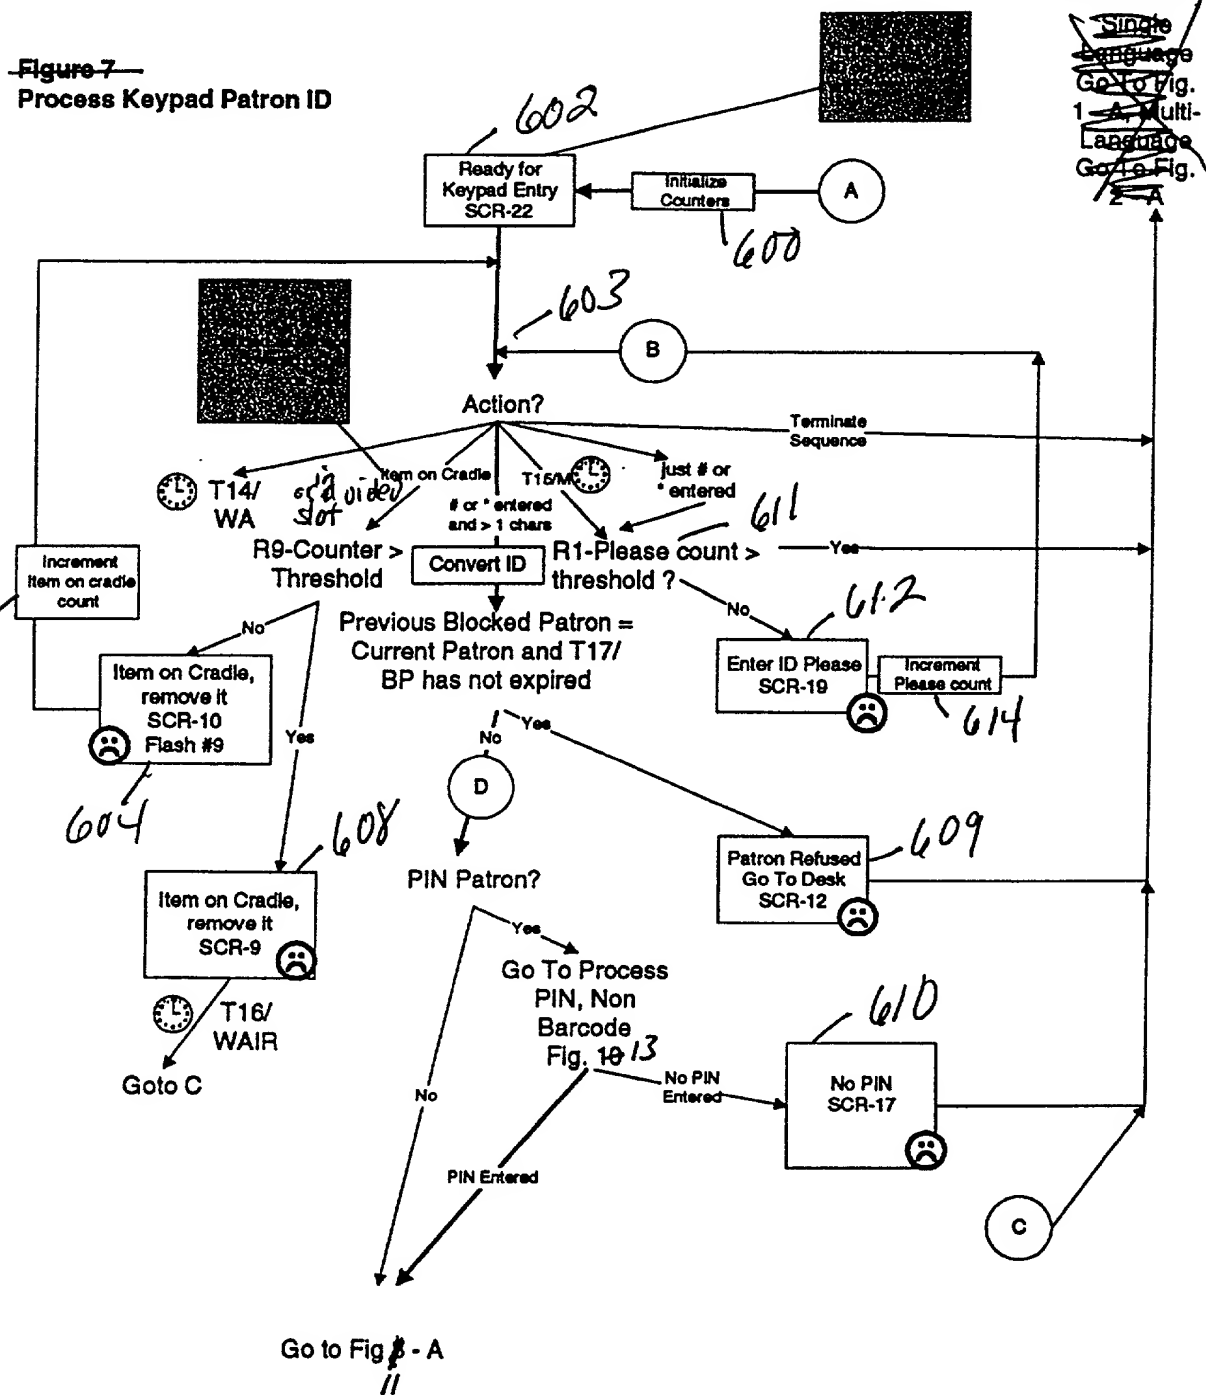


Figure 7 - Process Keypad Patron ID

FIGURE 10

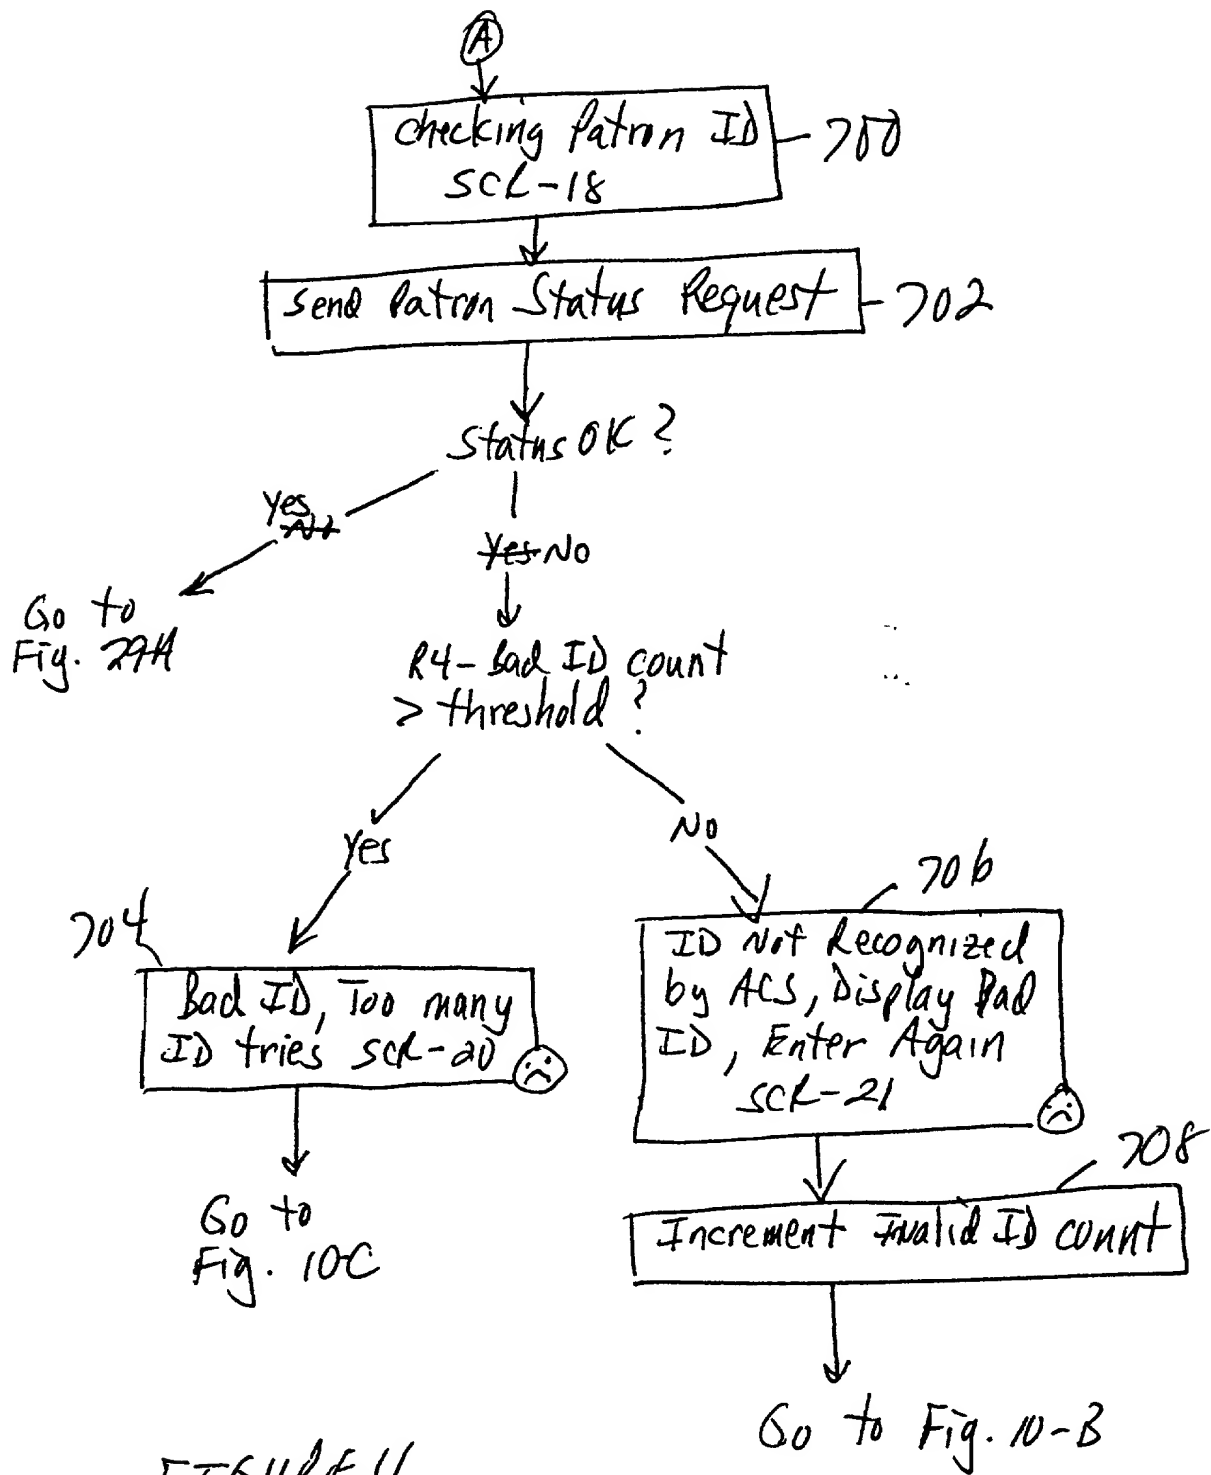


FIGURE 11

Figure 9

Process PIN - Barcode Patron ID

The patron must enter a PIN with at least 1 character. Entry screens will include feedback to the patron on each character entered and instructions on how to start over if they want to.

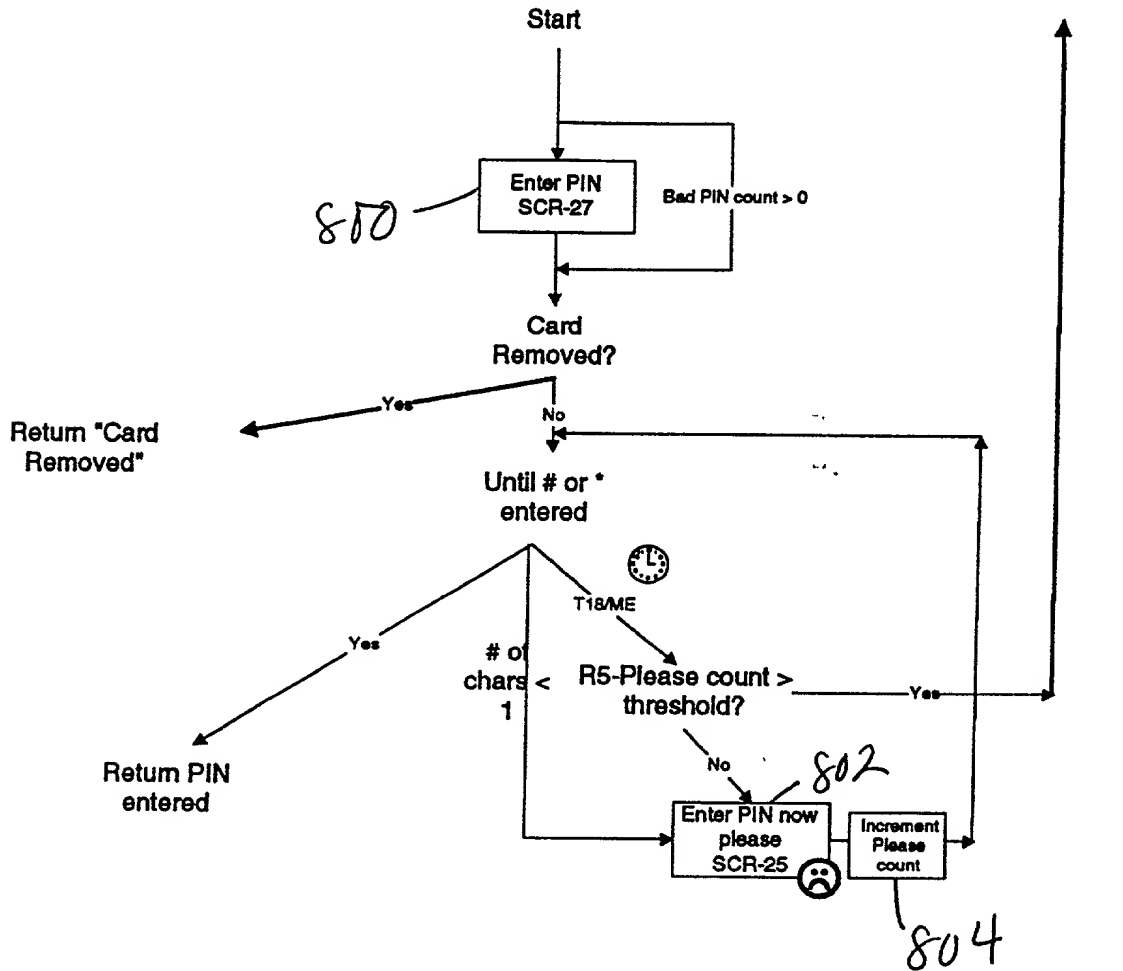


Figure 9 Process PIN Barcode Patron ID

FIGURE 12

Figure 10
Process PIN - Non Barcode Patron ID

The patron must enter a PIN with at least 1 valid character.
Entry screens will include feedback to the patron on each
character entered and instructions on how to start over if they
want to.

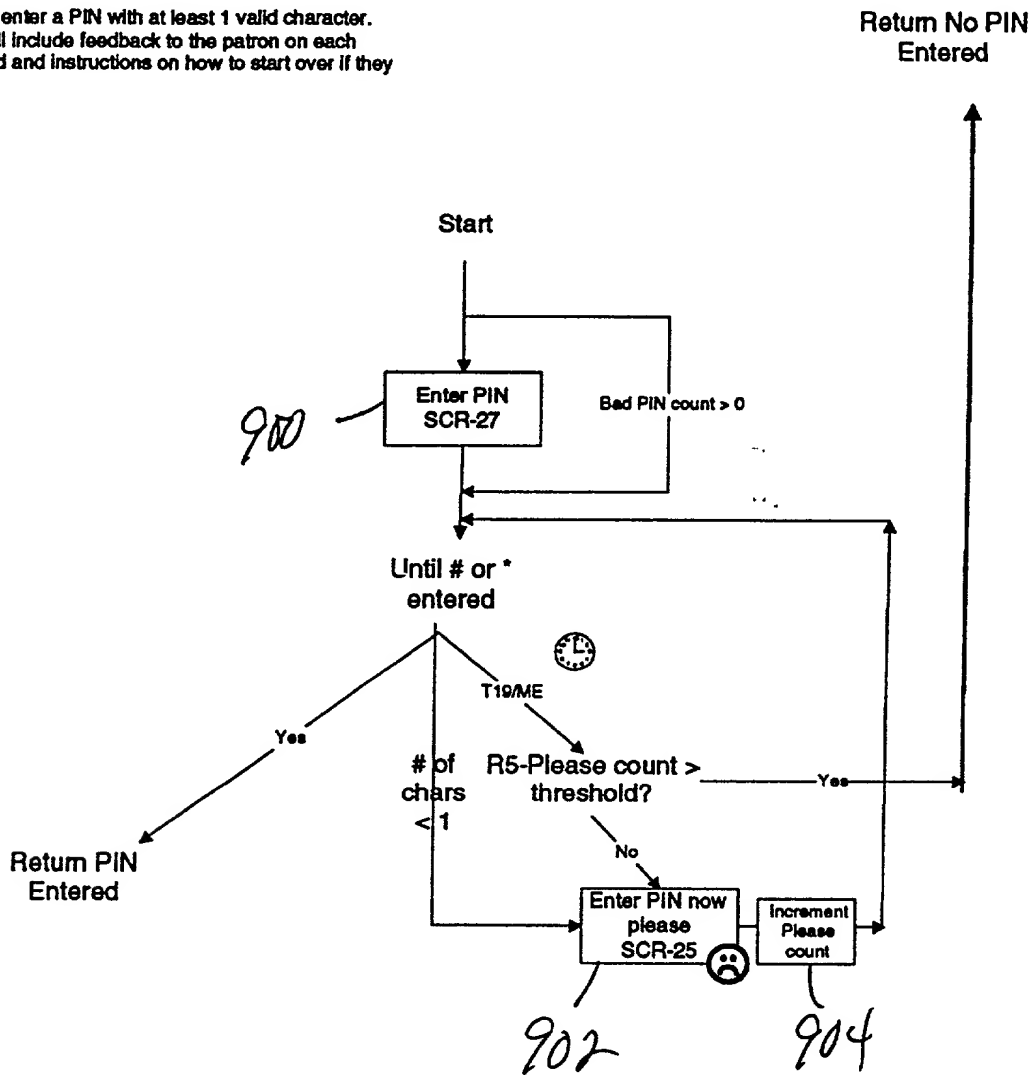


FIGURE 13

Figure 10 Process Pin Non Barcode Patron ID

Figure 11
Patron Barcode/w Magstripe

If a patrons barcoded card contains a magstripe, it must be removed before continuing to make sure it is not demagnetized.

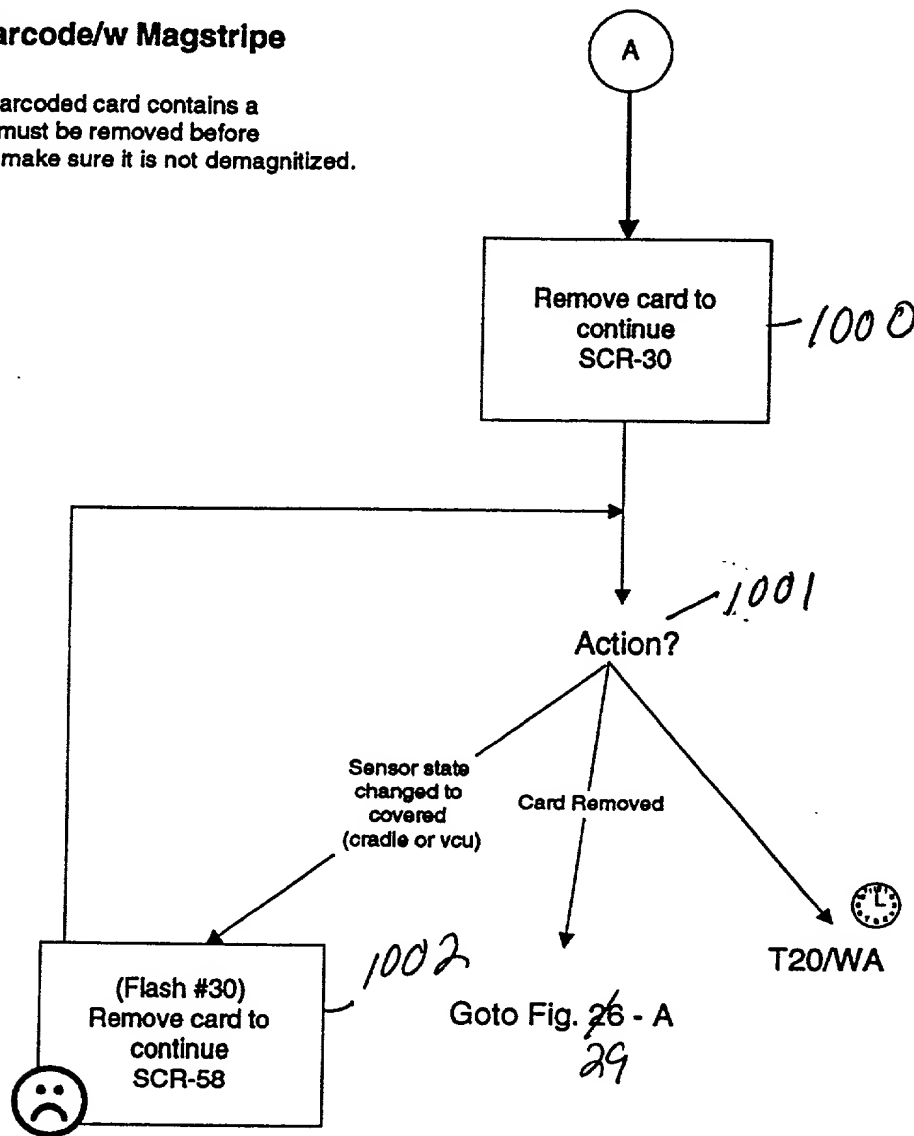


Figure 11 Patron Barcode w/Mag Stripe

FIGURE 14

This diagram covers reading and verifying the barcode on a book or CD.

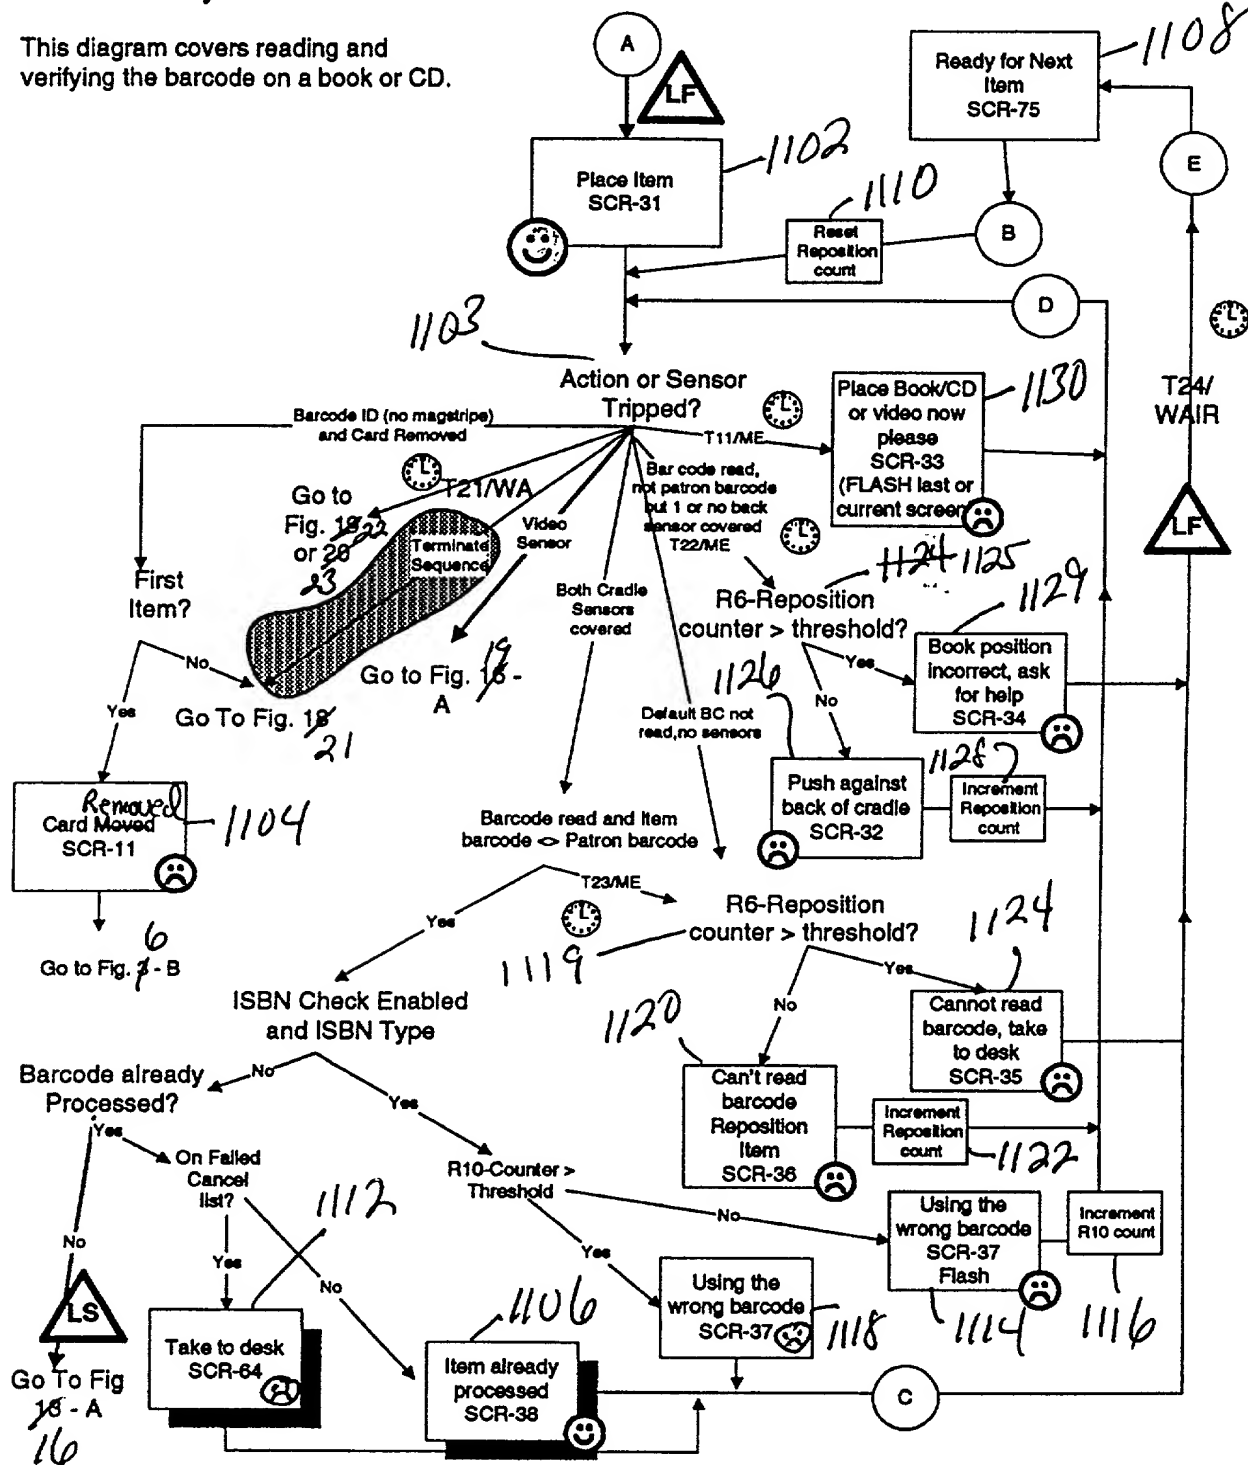


FIGURE 15

Figure 13
Checkout/Process Item

This diagram handles processing of an item from sending the request to the ACS to just before MBD processing.

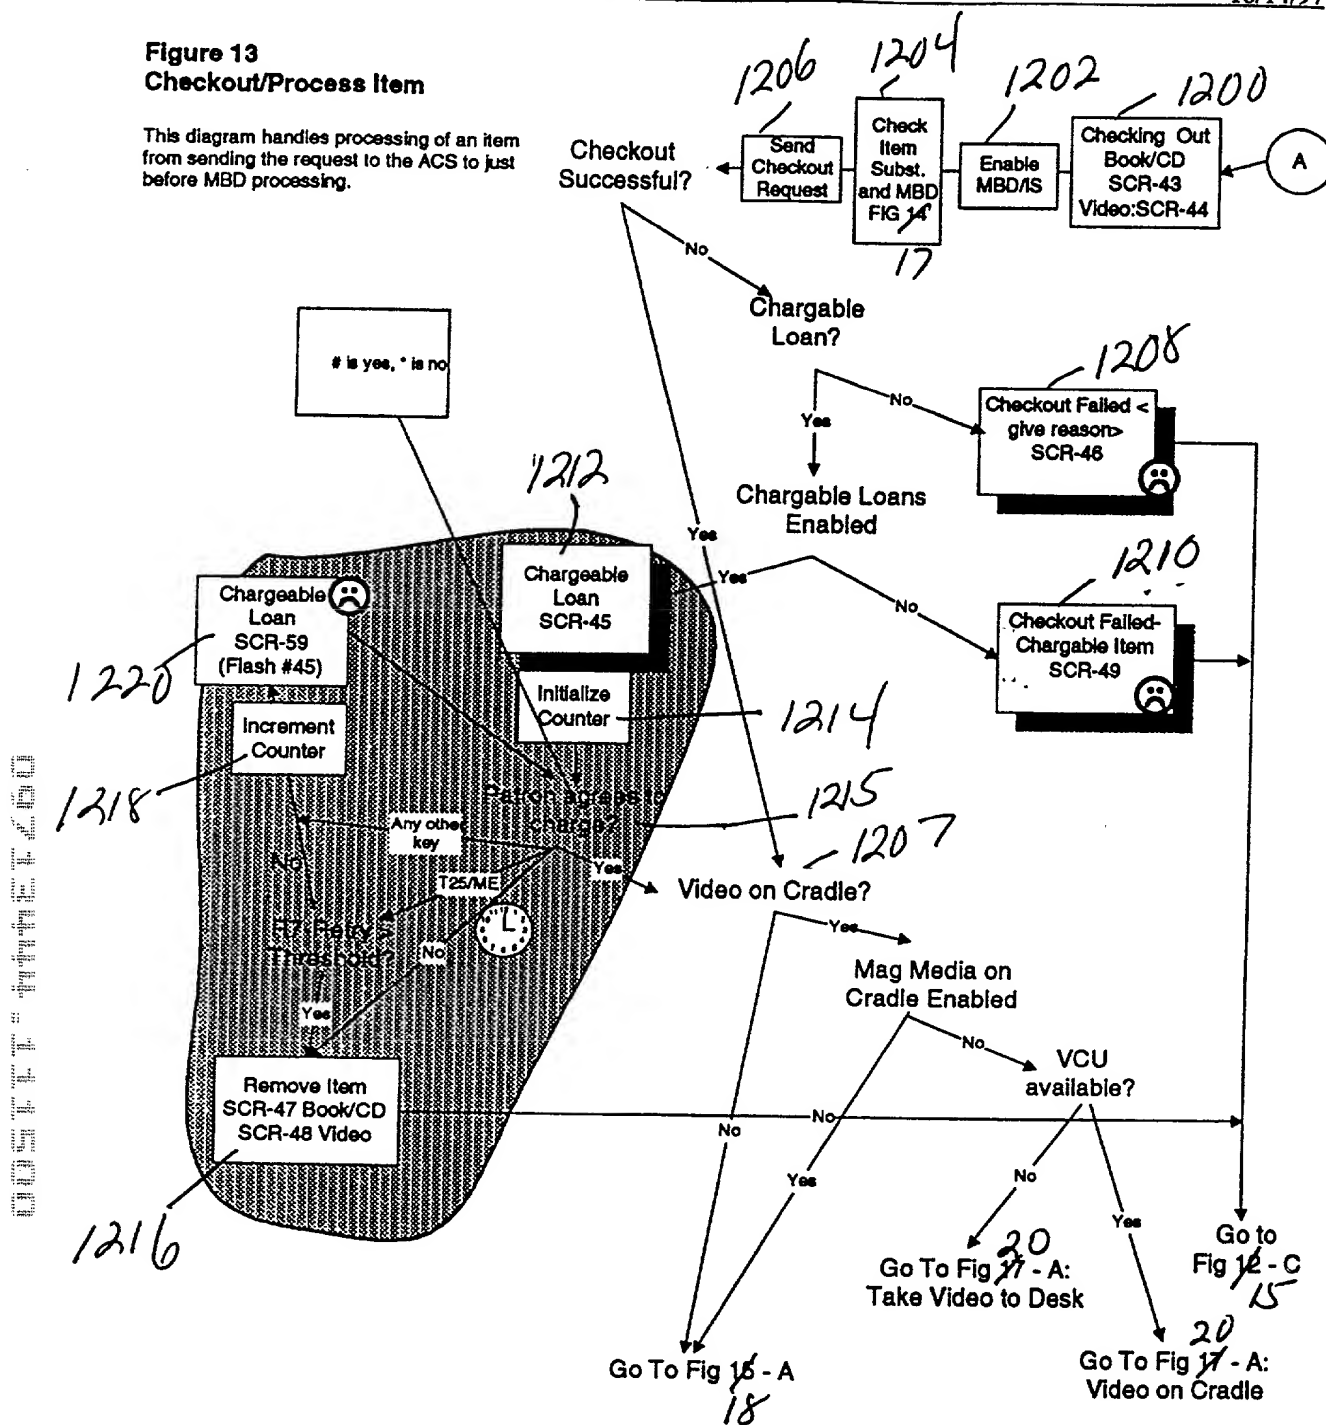


Figure 13 Checkout Process Item

FIGURE 16

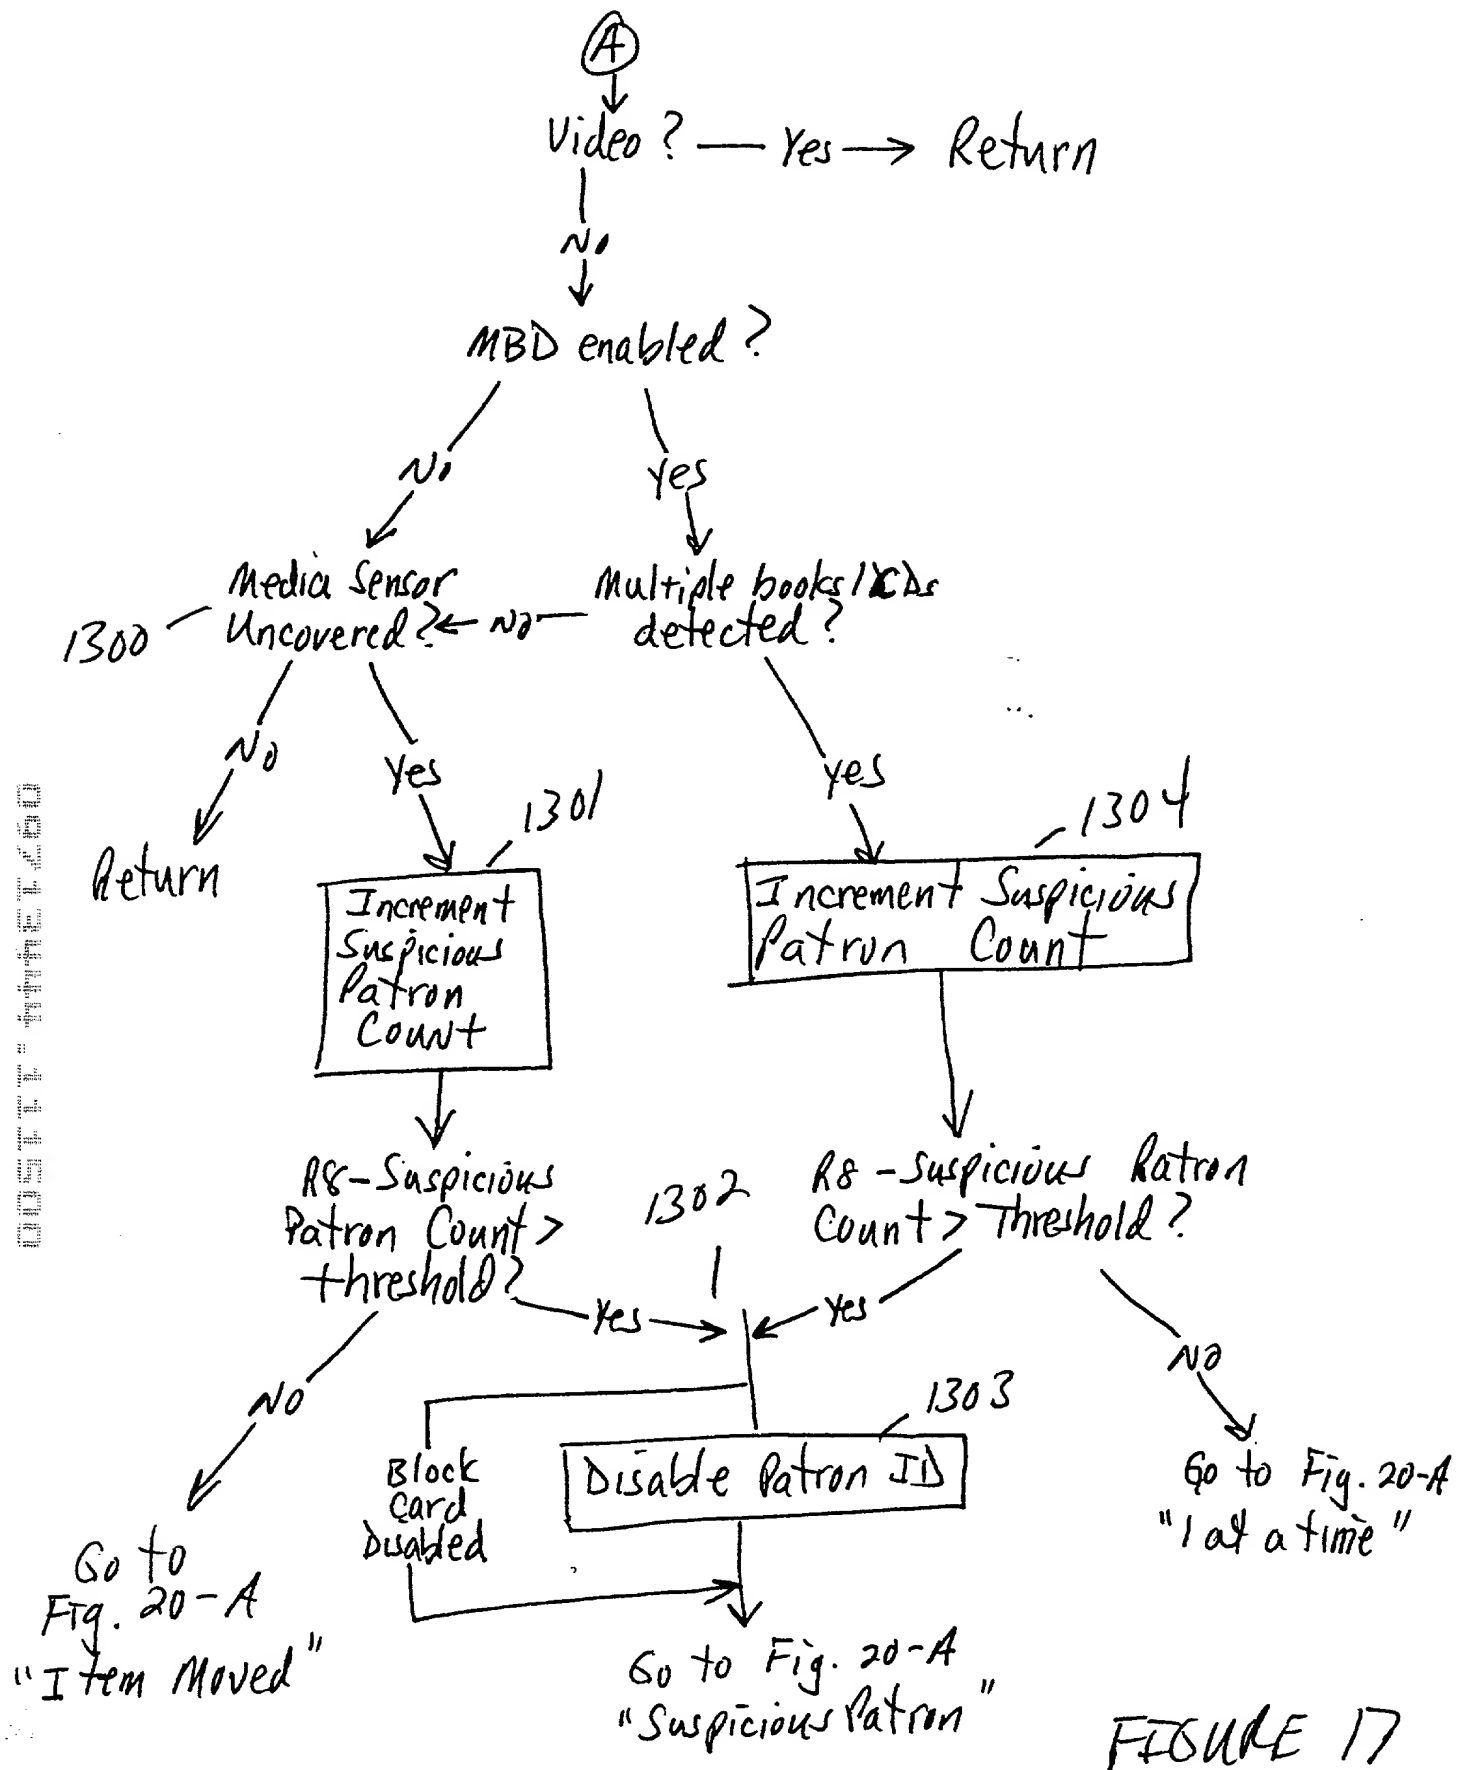


FIGURE 17

Figure 15
Checkout Final Processing

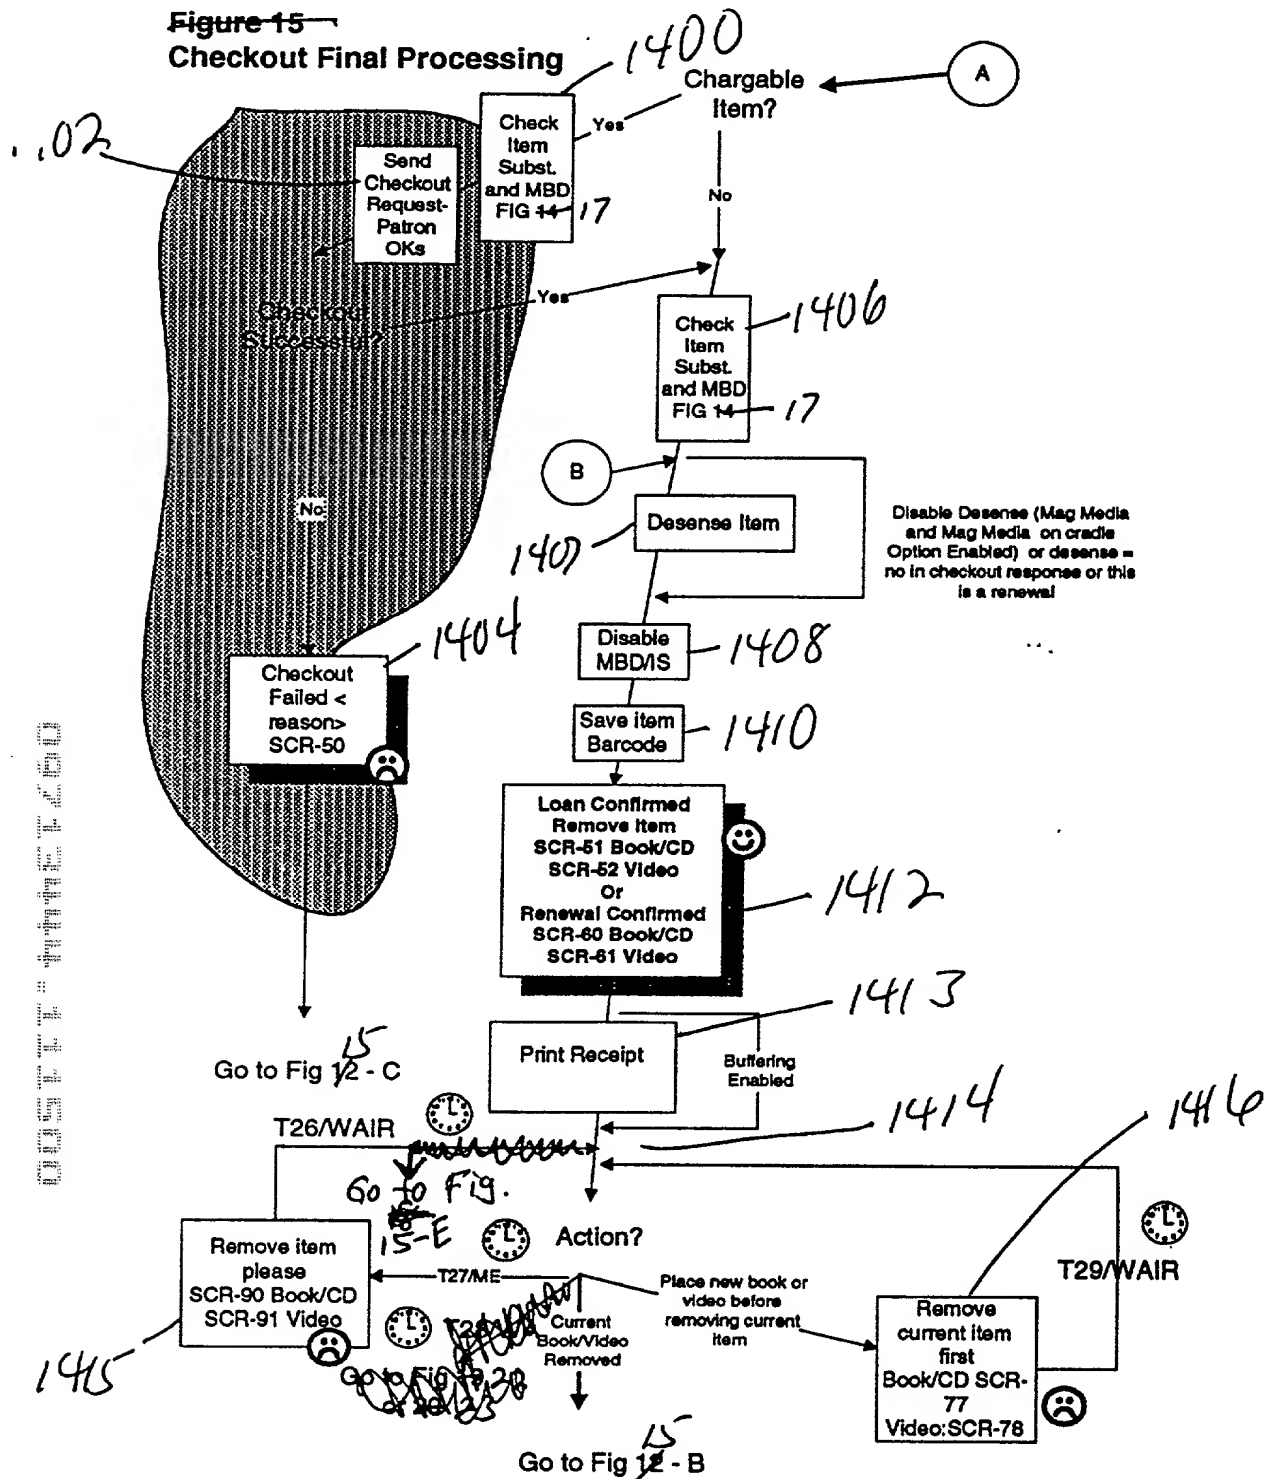


FIGURE 18

Figure 15 Checkout Final Processing

Figure 16
Checkout Video

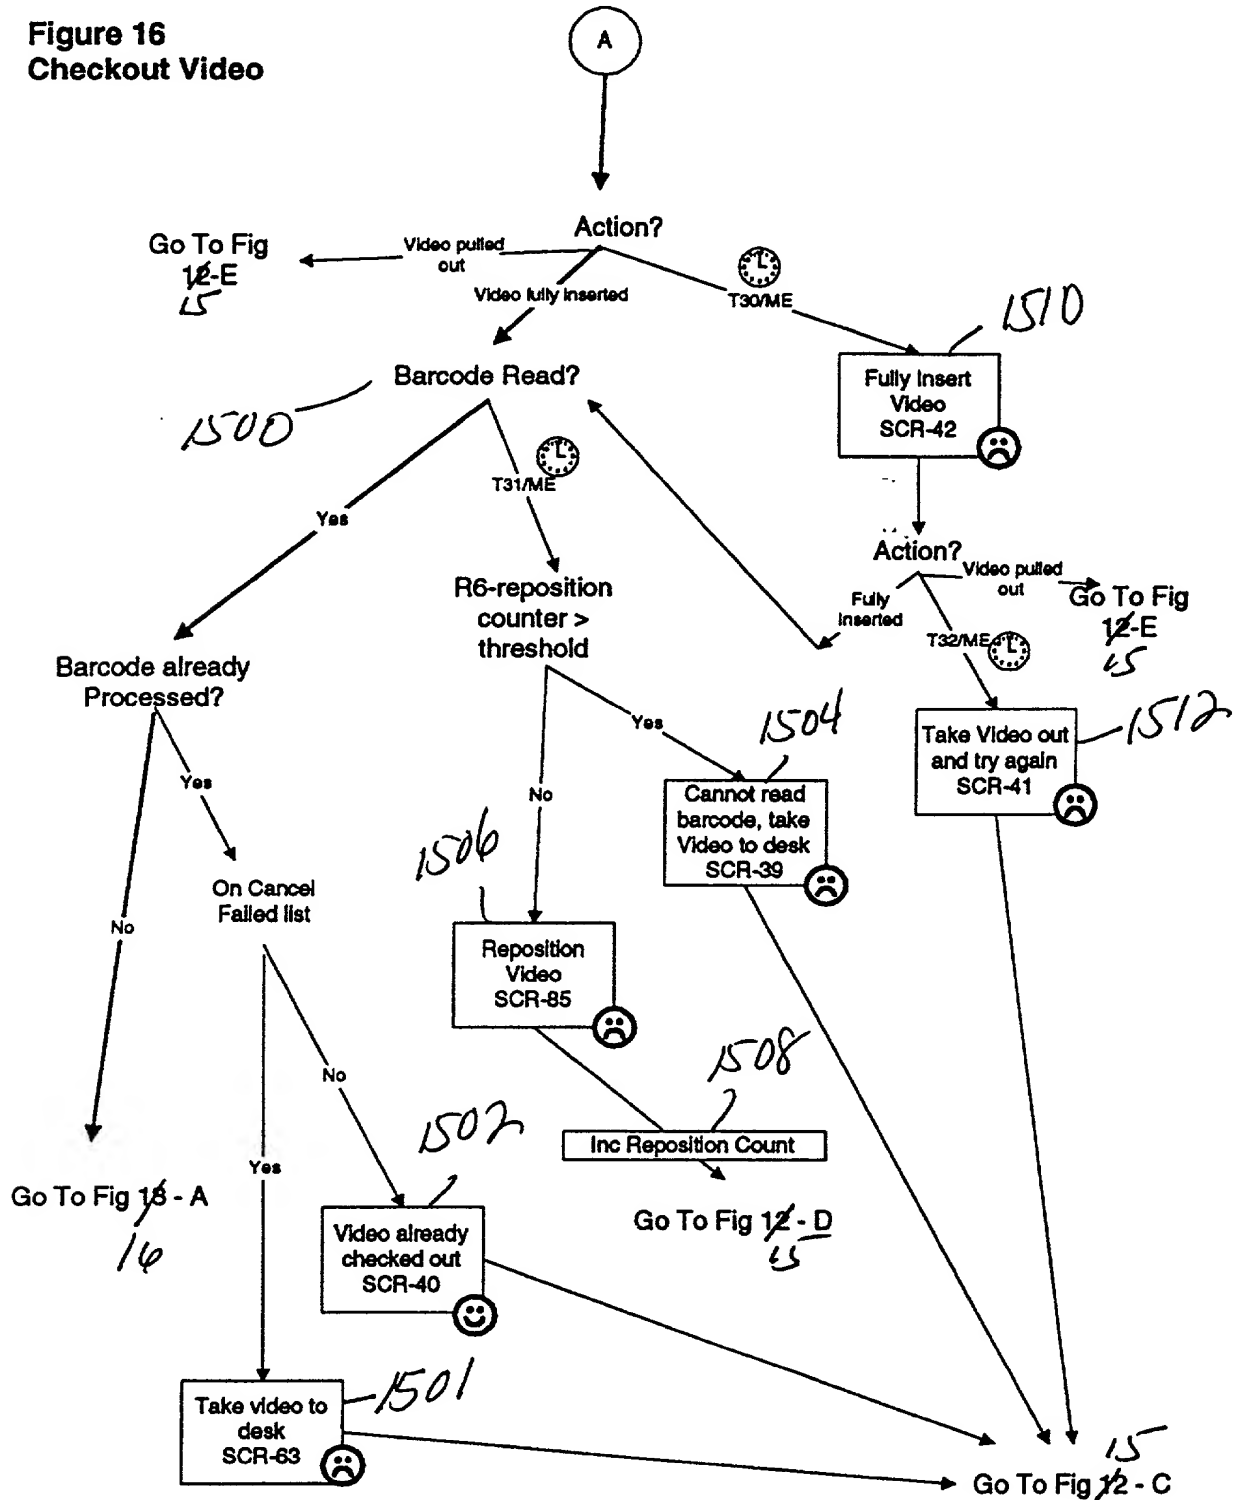


FIGURE 19

Figure 16 CheckoutVideo

Figure 17
Undo Checkout

These states handle backing out the checkout of an item if it can be done. In all cases this may not be possible.

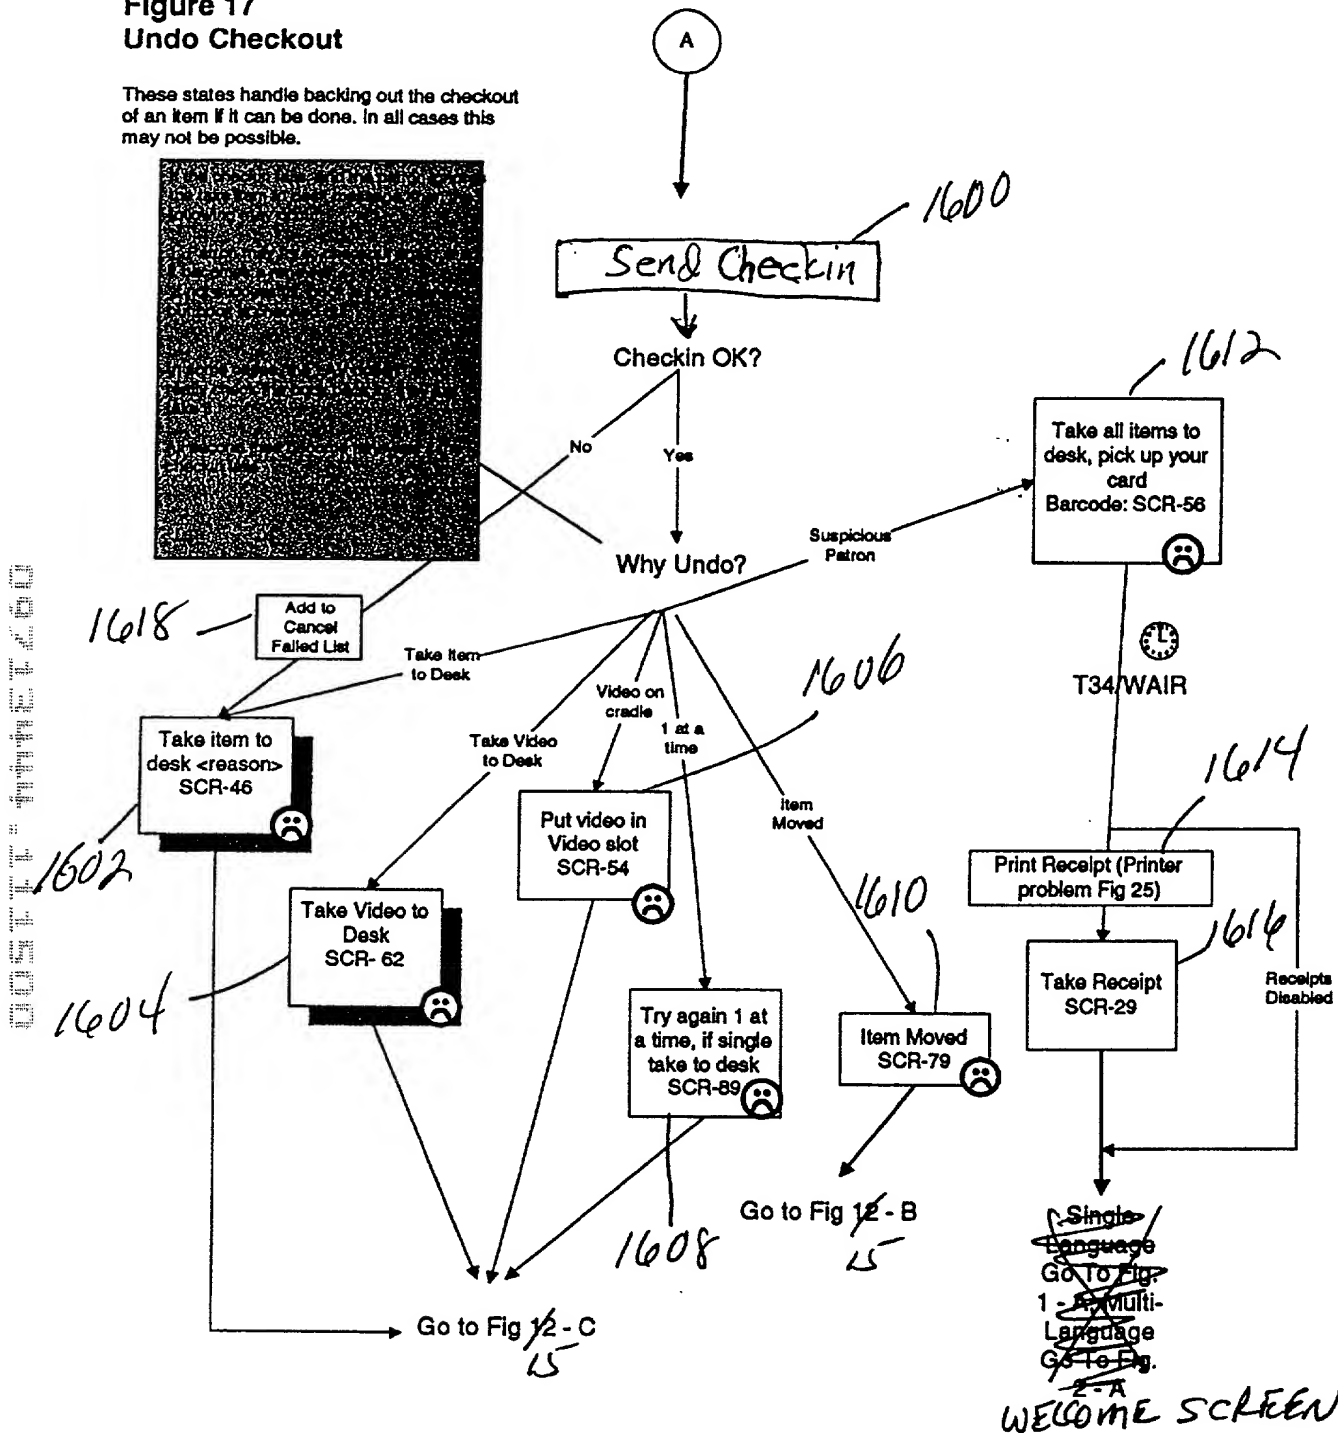


Figure 17 Undo Checkout

FIGURE 20

**Figure 18-
Terminate Session**

The patron has pressed the terminate session
key sequence or removed the card from the
card slot.

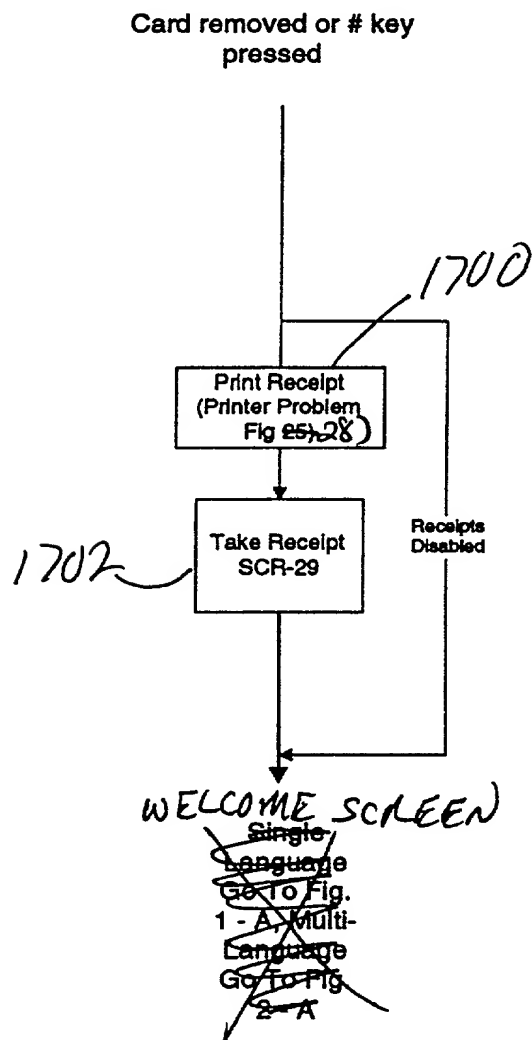


FIGURE 21

Figure 18 Terminate Session

Figure 19
Walk-Away - Barcode

The patron may have walked away when there is no activity and the card is still in the holder. This diagram defines the sequence of events once the walk away timer has expired.

We need to display a message asking the next patron to remove the card and all other items left behind before the SelfCheck can be used. If this is the same patron, they will need to remove their card and start over.

The library has the option to automatically disable cards or patron IDs that are left behind or not terminated. (so next patron doesn't pick up and use).

Using a microwave oven style beeper might alert the librarian to the situation.

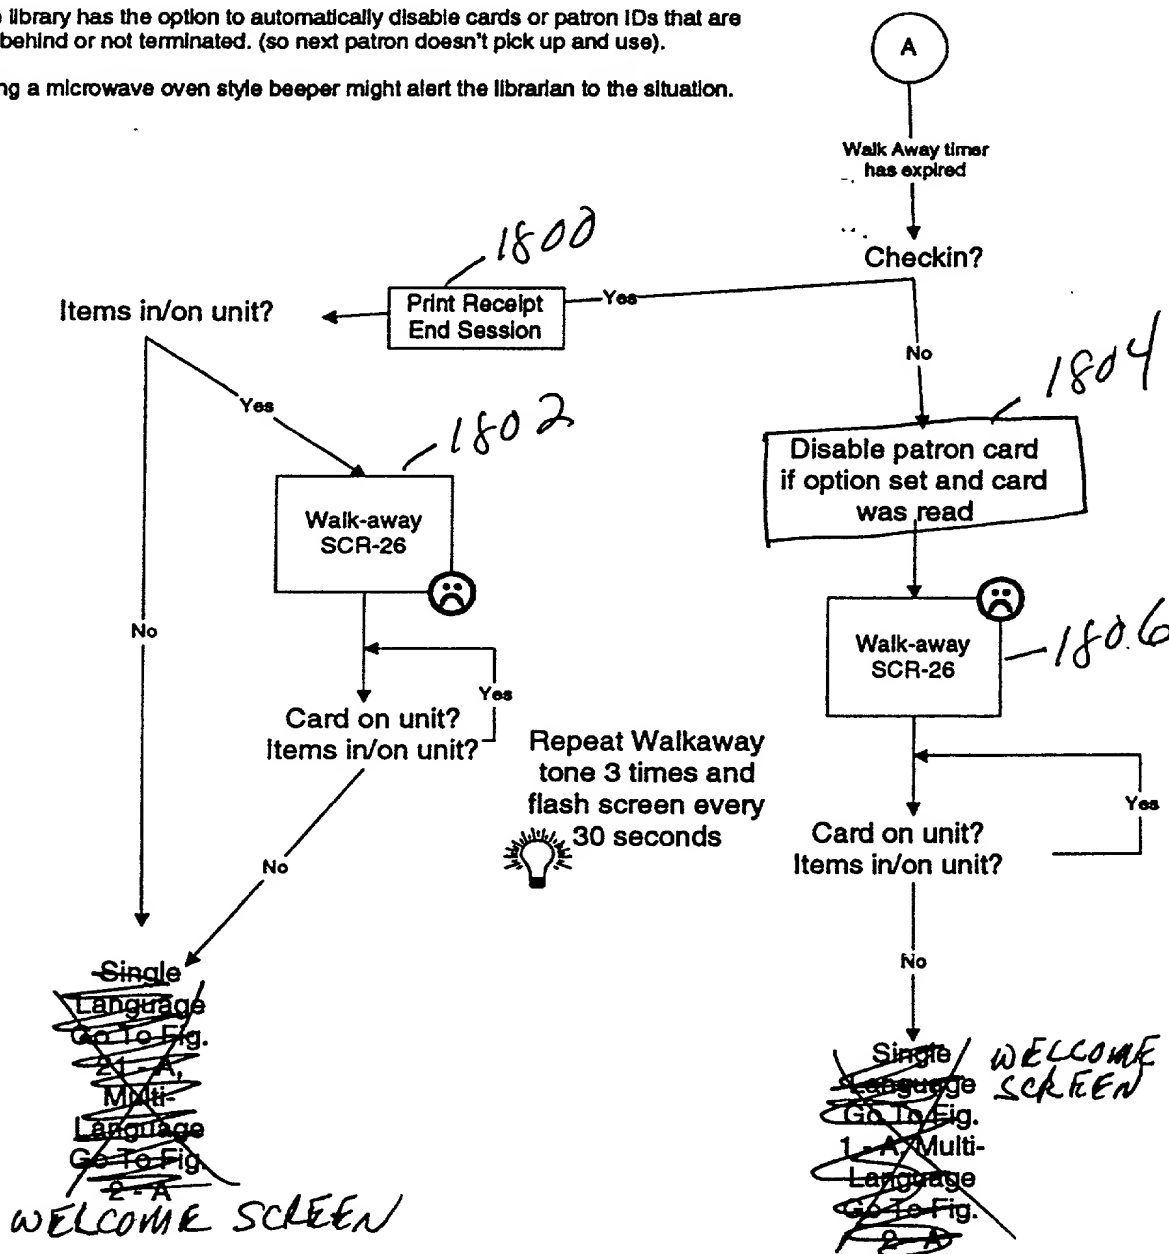


Figure 19 Walkaway Barcode ID

FIGURE 22

~~Figure 20~~

Walk-Away - Mag Swipe and Keypad

The patron may have walked away when
When no termination sequence has been pressed and no activity is sensed and
the Walk Away timer has expired. This diagram defines the sequence of events
when the Walk Away timer expires.

We need to display a message asking the next patron to remove items left
behind before the SelfCheck can be used.

The library has the option to automatically disable cards or patron IDs that are
left behind or not terminated. (so next patron doesn't pick up and use).

Using a microwave oven style beeper might alert the librarian to the situation.

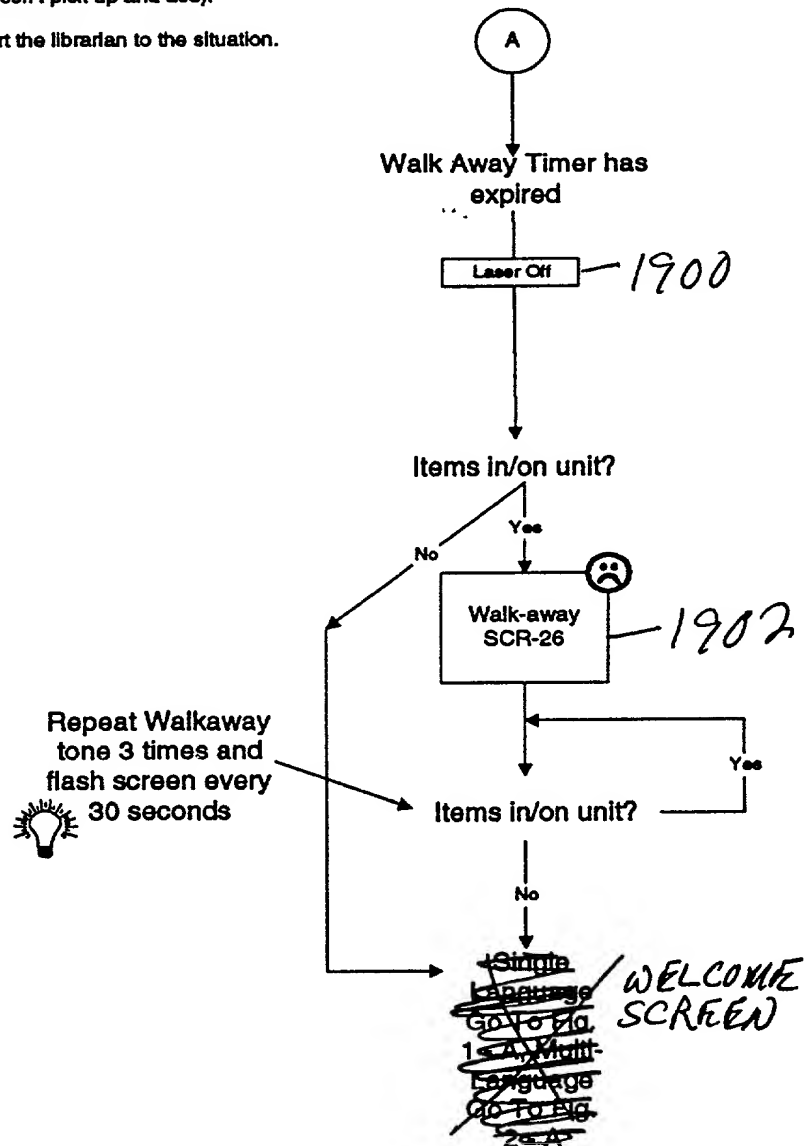


Figure 20 Walk Away - Mag Swipe and Keypad

FIGURE 23

Figure 21
Welcome Single Language
- Checkin

Initial screen (screen saver) instructs user to press any key to begin.

If patron places book or video continue with Checkin Items

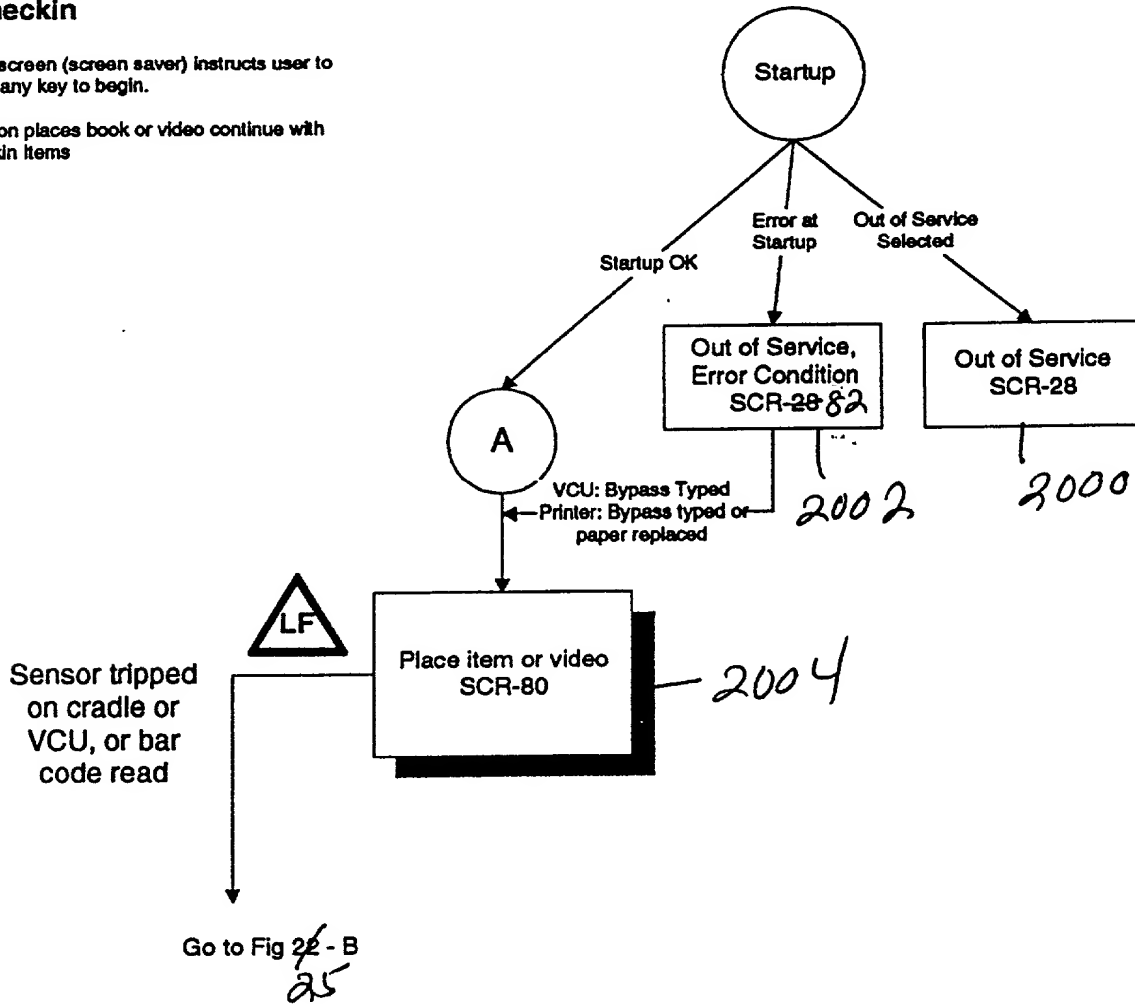


FIGURE 24

Figure 21 Welcome Single Language Checkin

This diagram covers reading and verifying the barcode on a book or CD.

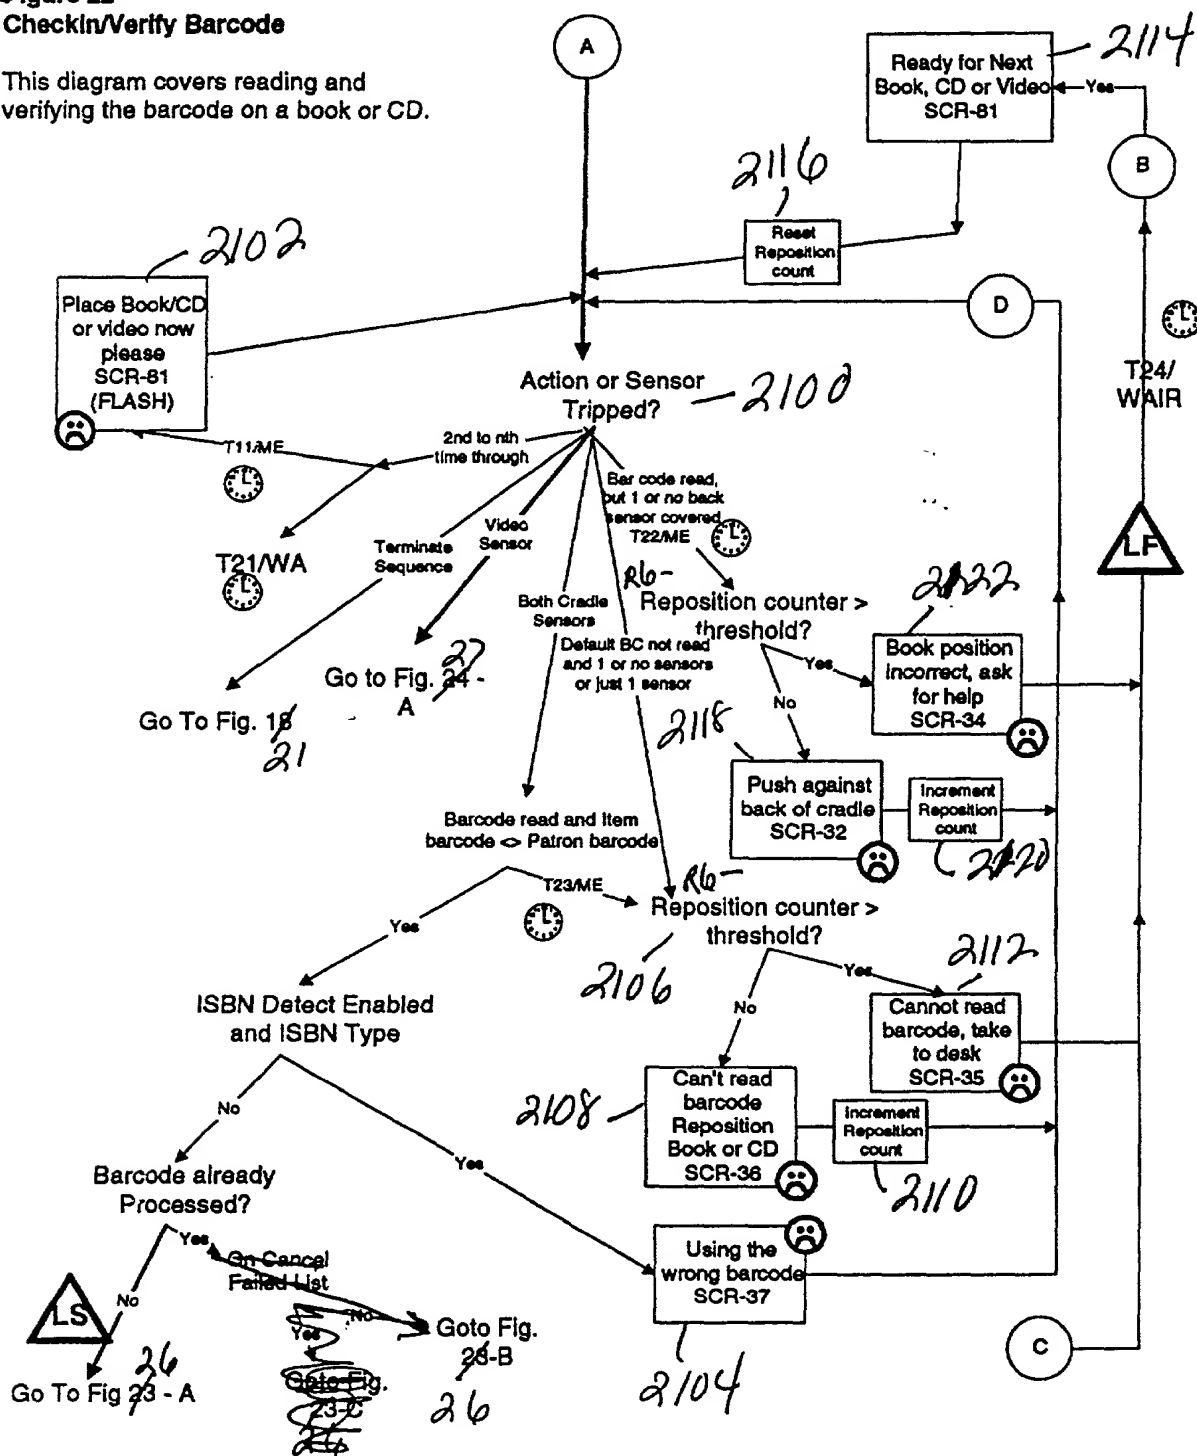


Figure 22 Checkin/Verify Barcode

FIGURE 25

Figure 23:
Checkin/Process Item

This diagram handles processing of an item from sending the request to the ACS to completing the checkin.

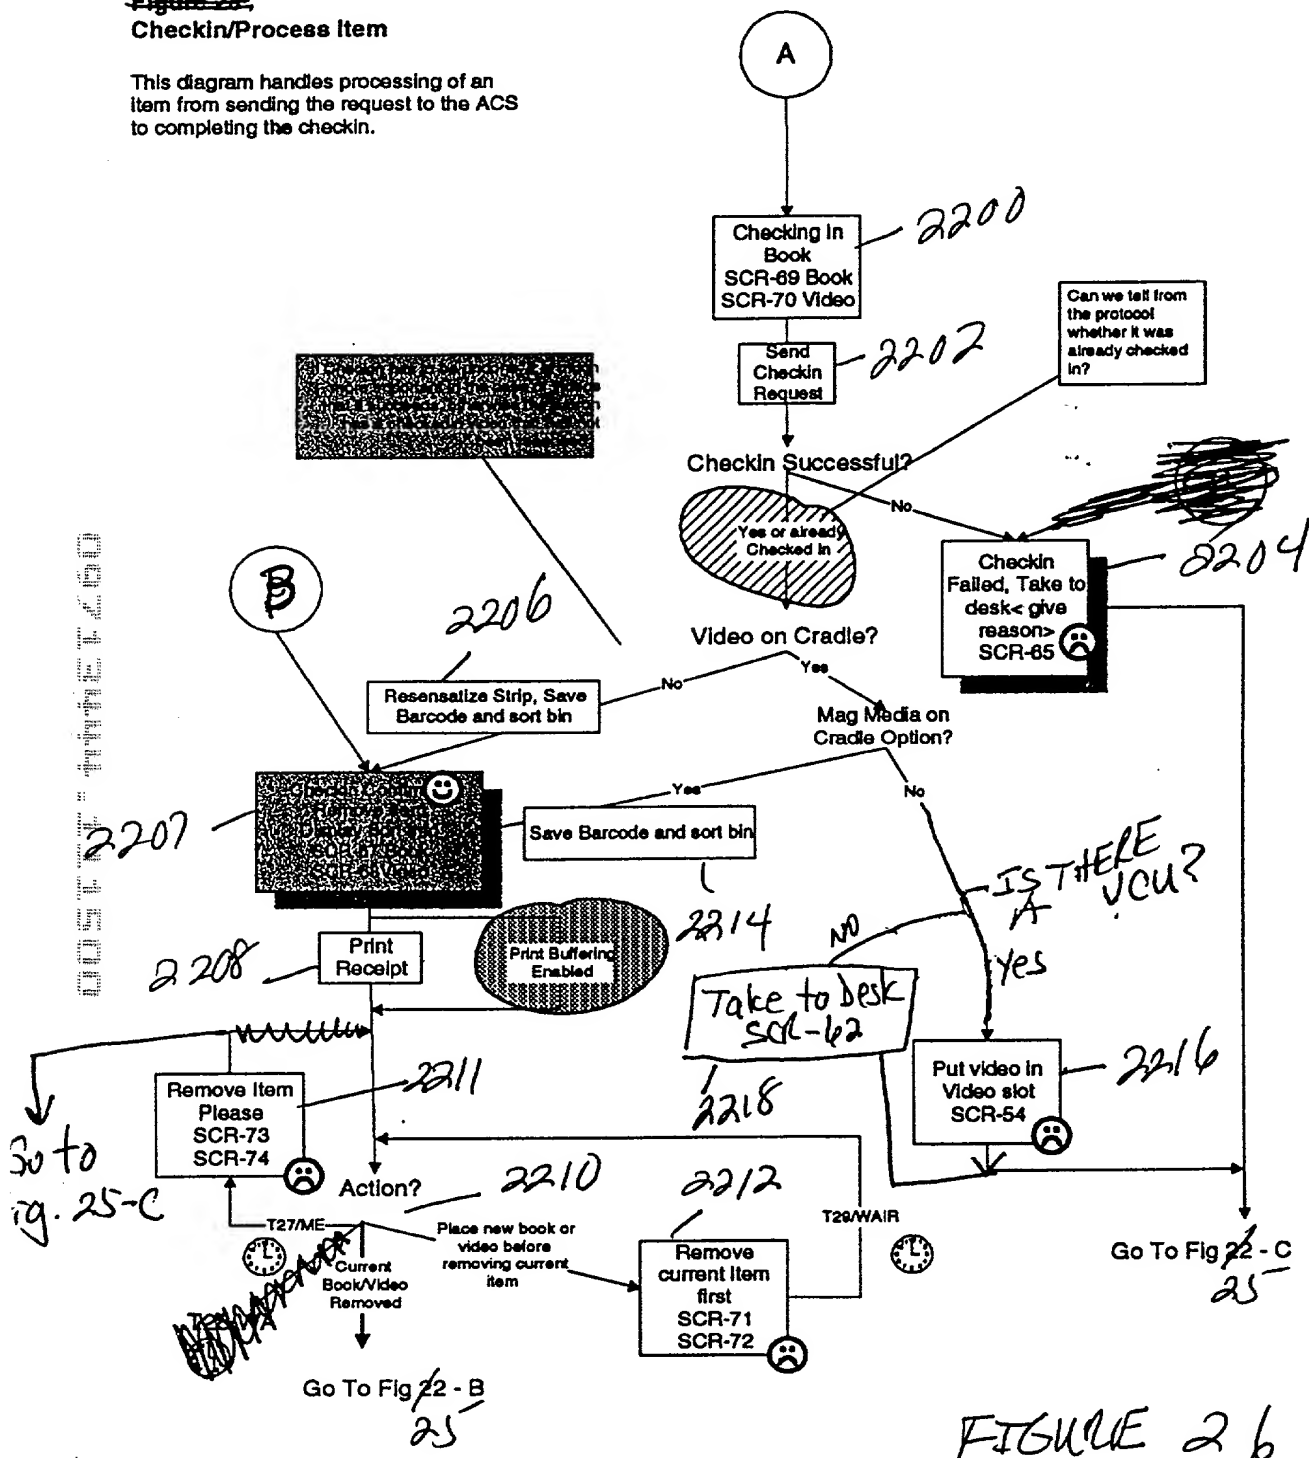


Figure 23 Checkin Process Item

Figure 24
CheckIn Video

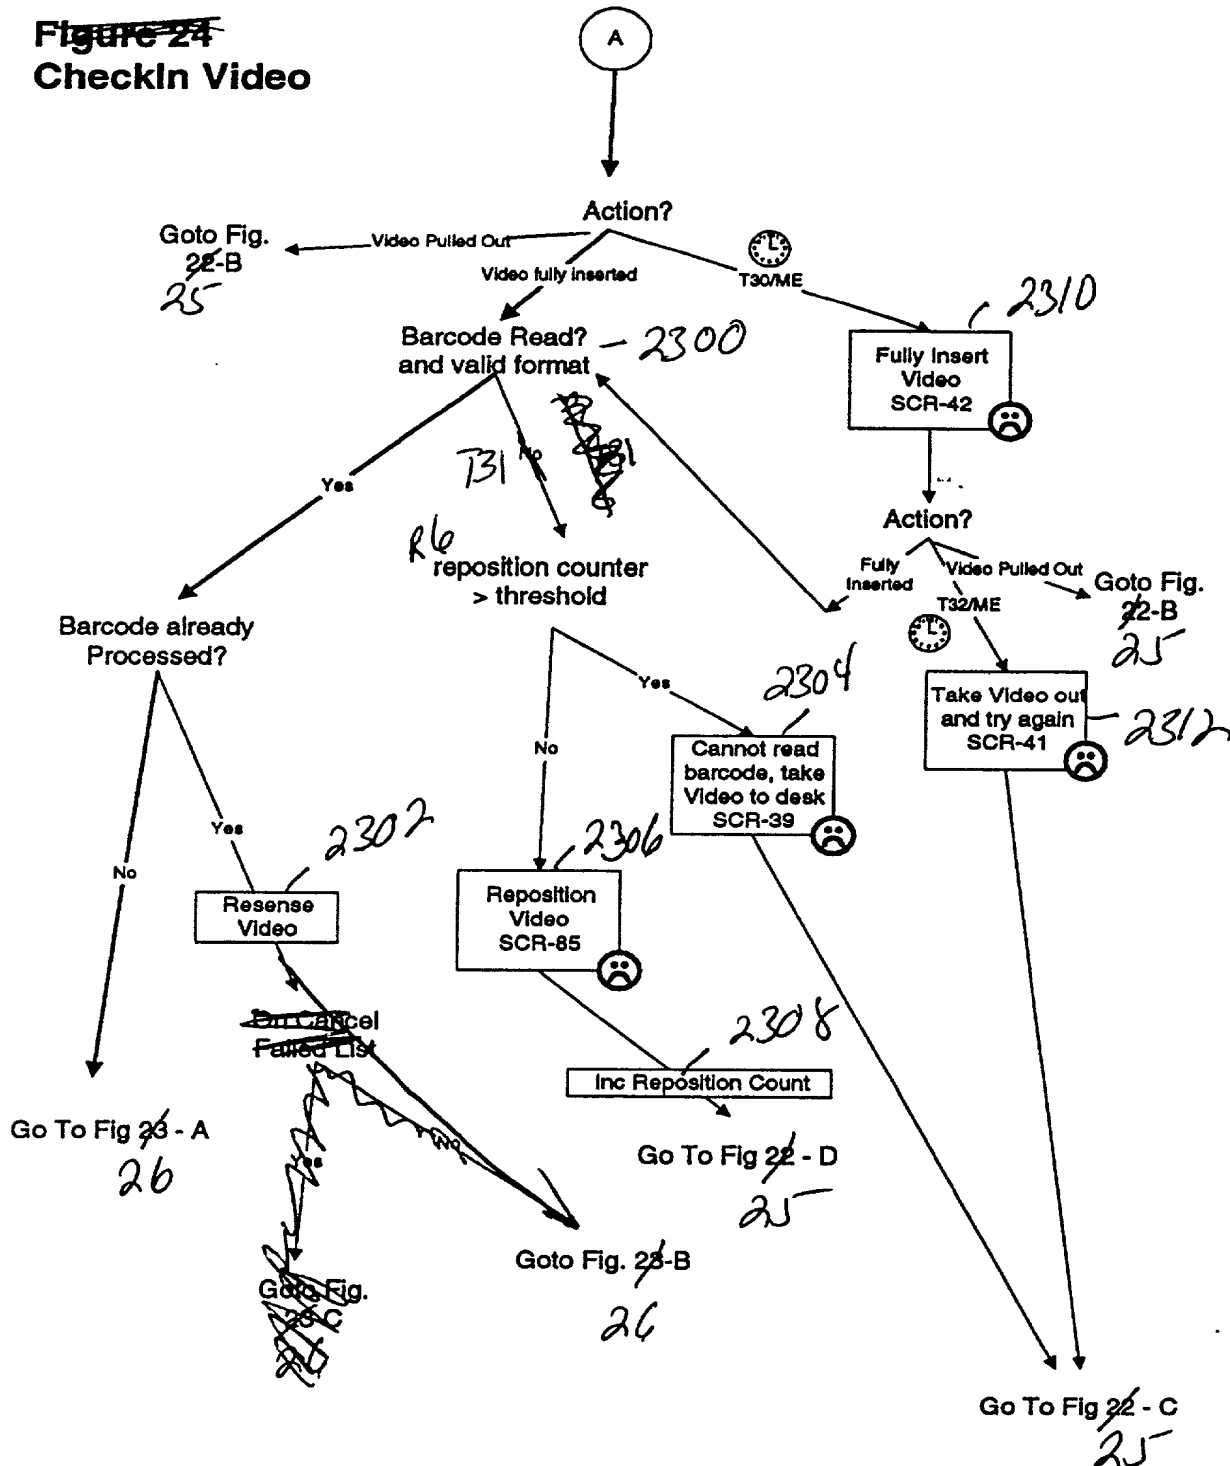


Figure 24 Checkin Video

FIGURE 27

Figure 25

Printer Problem

The printer has failed and the staff can bypass or fix the problem. Could simply be out of paper.

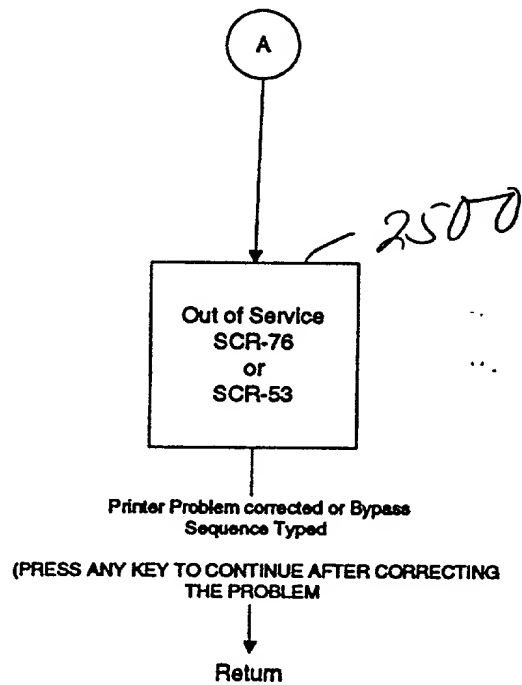


FIGURE 25

Figure 25 - Printer Problem

Figure 26

Post ID Processing

Display patron info if that option is selected.

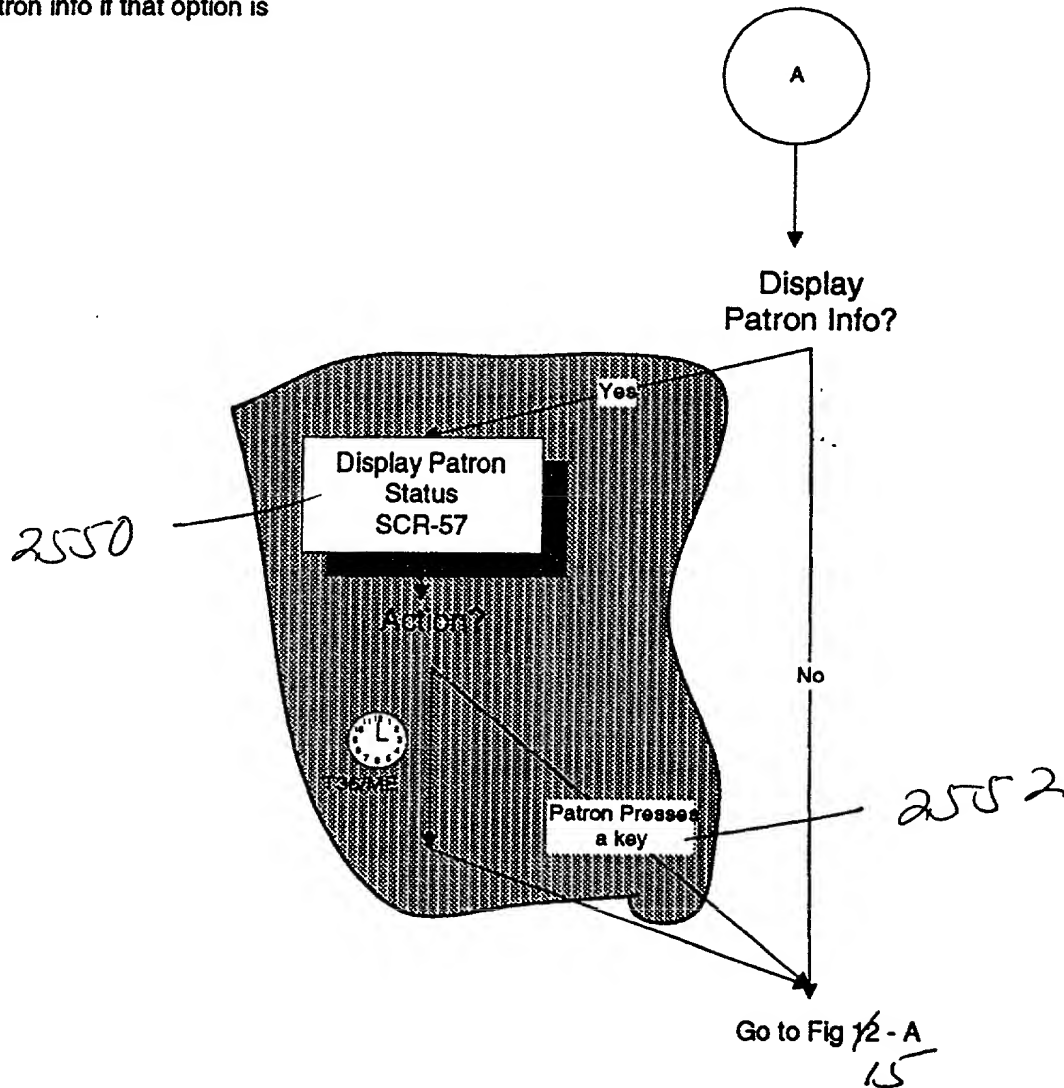


Figure 26 - Post ID Processing

FIGURE 29

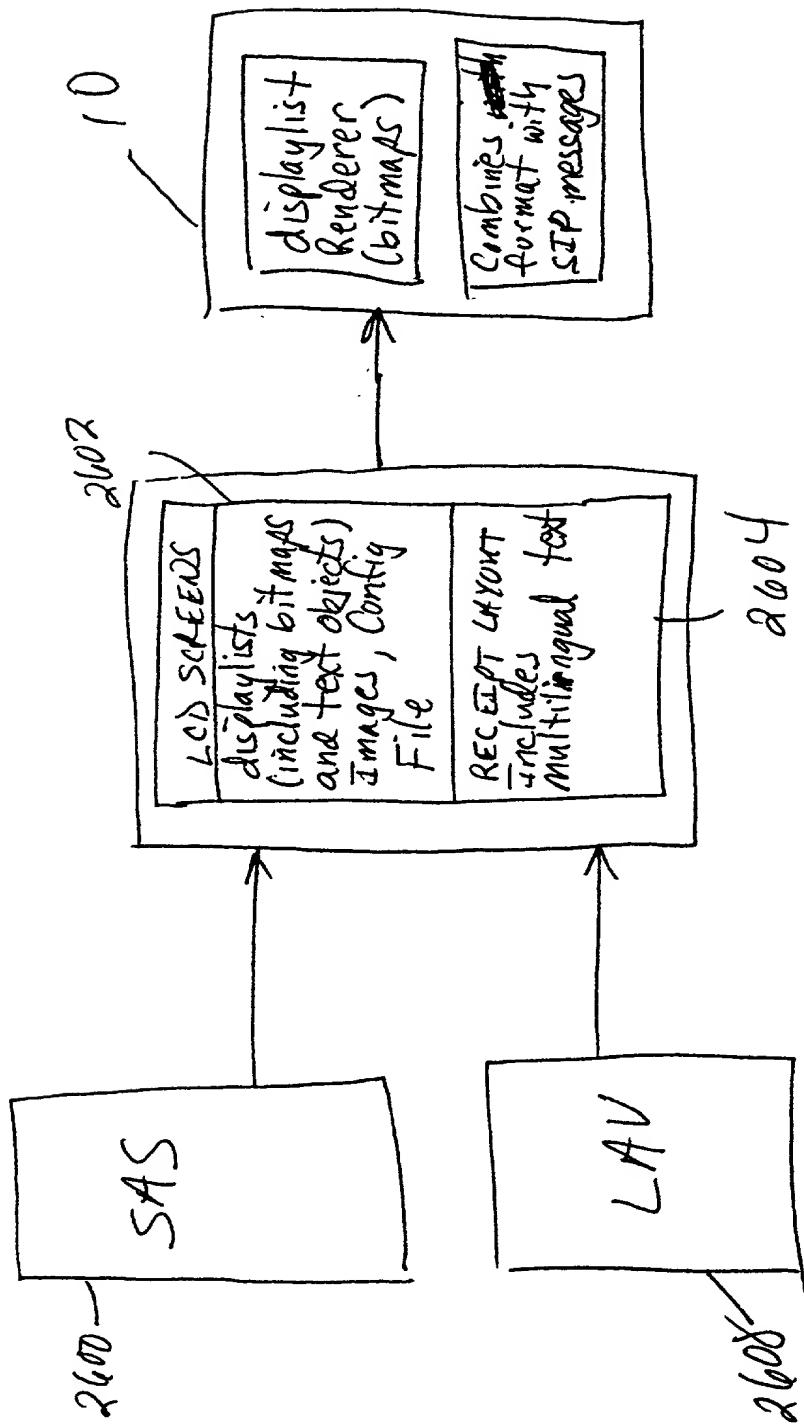


FIGURE 30

DECLARATION, POWER OF ATTORNEY, AND PETITION

I, a below named inventor, depose and say that: (1) my residence, citizenship, and mailing address are indicated below; (2) I have reviewed and understand the contents of my patent application, including the claims, as amended by any amendment specifically referred to herein, which is identified as U.S. Patent Application Serial No. 09/058,547, filed 4/10/98; (3) I believe that the other below named inventors and I are the original, first, and joint inventors or discoverers of the invention or discovery in

TERMINAL FOR LIBRARIES AND THE LIKE

described and claimed therein and for which a patent is sought; and (4) I hereby acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations, §1.56.*

I hereby appoint Gregory D. Allen (Reg. No. 35,048), Scott A. Bardell (Reg. No. 39,594), Stephen W. Bauer (Reg. No. 32,192), Dale A. Bjorkman (Reg. No. 33,084), Jennie G. Boeder (Reg. No. 28,952), William J. Bond (Reg. No. 32,400), Warren R. Bovee (Reg. No. 26,434), Stephen W. Buckingham (Reg. No. 30,035), John A. Burtis (Reg. No. 39,924), Paul W. Busse (Reg. No. 32,403), Gerald F. Chernivec (Reg. No. 26,537), James D. Christoff (Reg. No. 31,492), David R. Cleveland (Reg. No. 29,524), Philip Y. Dahl (Reg. No. 36,115), Janice L. Dowdall (Reg. No. 31,201), Lisa M. Fagan (Reg. No. 40,601), Gregory J. Feulner (Reg. No. P-41,744), Darla P. Fonseca (Reg. No. 31,783), John A. Fortkort (Reg. No. 38,454), Richard Francis (Reg. No. 25,393), Melanie G. Gover (Reg. No. P-41,793), Gary L. Griswold (Reg. No. 25,396), Doreen S. L. Gwin (Reg. No. 35,580), H. Sanders Gwin (Reg. No. 33,242), Michael A. Hakamaki (Reg. No. 40,011), Karl G. Hanson (Reg. No. 32,900), Nester F. Ho (Reg. No. 39,460), Jeffrey J. Hohenshell (Reg. No. 34,109), Robert W. Hoke (Reg. No. 29,226), John H. Hornickel (Reg. No. 29,393), MarySusan Howard (Reg. No. 38,729), Stephen C. Jensen (Reg. No. 35,207), Robert H. Jordan (Reg. No. 31,973), Walter N. Kirn, Jr. (Reg. No. 21,196), Harold C. Knecht (Reg. No. 35,576), Charles D. Levine (Reg. No. 32,477), Douglas B. Little (Reg. No. 28,439), Eloise J. Maki (Reg. No. 33,418), Lisa M. McGeehan (Reg. No. 41,185), Matthew B. McNutt (Reg. No. 39,766), Michelle M. Michel (Reg. No. 33,968), William D. Miller (Reg. No. 37,988), Peter L. Olson (Reg. No. 35,308), Daniel R. Pastirik (Reg. No. 33,025), David B. Patchett (Reg. No. 39,326), Carolyn V. Peters (Reg. No. 33,271), Terry K. Qualey (Reg. No. 25,148), Ted K. Ringsred (Reg. No. 35,658), James A. Rogers (Reg. No. 37,228), Daniel C. Schulte (Reg. No. 40,160), Leland D. Schultz (Reg. No. 30,322), Steven E. Skolnick (Reg. No. 33,789), Robert W. Sprague (Reg. No. 30,497), Brian E. Szymanski (Reg. No. 39,523), James J. Trussell (Reg. No. 37,251), F. Andrew Ubel (Reg. No. 36,704), and Lucy C. Weiss (Reg. No. 32,834), my attorneys and/or agents with full powers (including the powers of appointment, substitution, and revocation) to prosecute this application and any division, continuation, continuation-in-part, reexamination, or reissue thereof, and to transact all business in the Patent and Trademark Office connected therewith; the mailing address and the telephone number of the above-mentioned attorneys and/or agents are

Attention: Stephen W. Buckingham
 3M Office of Intellectual Property Counsel
 P.O. Box 33427
 St. Paul, Minnesota 55133-3427
 Telephone No. 612/733-3379

The undersigned petitioner declares further that all statements made herein of his own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

*Title 37, Code of Federal Regulations, §1.56 is attached.

Wherefore, I pray for grant of Letters Patent for the invention or discovery described and claimed in the aforementioned specification and we hereby subscribe our names to the foregoing specification and claims, declaration, power of attorney, and this petition, on the day set forth below.

Roger D. Larson 6/25/98
Date

Residence: Woodbury, MN U.S.A.
Citizenship: U.S.A.
Post Office P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

James E. Fergen 4/8/98
Date

Residence: North St. Paul, MN U.S.A.
Citizenship: U.S.A.
Post Office P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

John E. Nelson 6/8/98
Date

Residence: Woodbury, MN U.S.A.
Citizenship: U.S.A.
Post Office P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

Thomas J. Brace 6/16/98
Date

Residence: Oakdale, MN U.S.A.
Citizenship: U.S.A.
Post Office P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

Michael J. Kieffer 6/19/98
Date

Residence: Apple Valley, MN U.S.A.
Citizenship: U.S.A.
Post Office P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

John D. Yorkovich 6/11/98
Date

Residence: Maplewood, MN U.S.A.
Citizenship: U.S.A.
Post Office P.O. Box 33427
Address: St. Paul, Minnesota 55133-3427

Gerald L. Karel 6/8/98

Gerald L. Karel Date

Residence: Maplewood, MN U.S.A.

Citizenship: U.S.A.

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

Gerald G. Marsolek 4/17/98

Gerald G. Marsolek Date

Residence: South St. Paul, MN U.S.A.

Citizenship: U.S.A.

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

Joseph E. Schwietz, Jr. 6/8/98

Joseph E. Schwietz, Jr. Date

Residence: Forest Lake, MN U.S.A.

Citizenship: U.S.A.

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

Mitchell B. Grunes 8/18/98

Mitchell B. Grunes Date

Residence: Minneapolis, MN U.S.A.

Citizenship: U.S.A.

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

Kathleen M. McLeod Aug 5/98

Kathleen M. McLeod Date

Residence: London, Ontario

Citizenship: Canada

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

Richard M. Willems 11/10/98


Richard M. Willems Date

Residence: South St. Paul, MN U.S.A.

Citizenship: U.S.A.

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

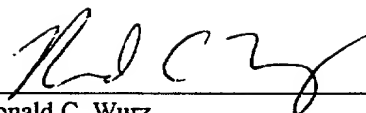

Ronald C. Wurz

Date

Residence: Chalfont, PA U.S.A.

Citizenship: U.S.A.

Post Office P.O. Box 33427

Address: St. Paul, Minnesota 55133-3427

§1.56 Duty to disclose information material to patentability.

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is cancelled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is cancelled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
- (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and

- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim; or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
 - (i) Opposing an argument of unpatentability relied on by the Office, or
 - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

(c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:

- (1) Each inventor named in the application;
- (2) Each attorney or agent who prepares or prosecutes the application; and
- (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.

(d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor.

PATENT
28299/34088E

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants:
Fergen, et al.

Serial No.: Not Yet Assigned
(Divisional of U.S. Application
Serial No. 09/058,547)

For: TERMINAL FOR
LIBRARIES AND THE LIKE


Filed: April 10, 1998

Probable Group Art Unit: 2736

Probable Examiner:
Jeffery A. Hofsass

) I hereby certify that this paper being
) deposited with the United States
) Postal Service in an envelope
) addressed to the Commissioner for
) Patents, Washington, D.C. 20231
) utilizing the "Express Mail Post Office
) to Addressee" service of the United
) States Postal Service under Mailing
) Label No. EM099905322US on this
) date:

) November 15, 2000
)

) 
) Richard Zimmermann

**STATEMENT REQUESTING DELETION
OF THE NAMES OF PERSONS WHO ARE NOT
INVENTORS OF THE CLAIMED INVENTION**

Commissioner for Patents
Washington, D.C. 20231

Sir:

Applicants hereby request deletion of the names of Roger D. Larson,
Thomas J. Brace, Gerald L. Karel, Richard M. Willems and Ronald C. Wurz
from the papers filed in the above-referenced application. By way of
explanation, this application is a divisional of U.S. Application Serial No.
09/058,547.

PATENT
28299/34088E


This divisional application has now been filed seeking examination of claims 132-152.

Upon careful investigation, it has been determined that none of the above named persons made any inventive contribution to the combinations recited in claims 132-152. Applicants, therefore, request that the records be corrected. If any fees are due in connection with this paper, the Commissioner is respectfully requested to charge such fees to Deposit Account No. 13-2855. A duplicate copy of this paper is enclosed for this purpose.

Respectfully submitted,

MARSHALL, O'TOOLE, GERSTEIN,
MURRAY & BORUN
6300 Sears Tower
233 South Wacker Drive
Chicago, Illinois 60606-6402
(312) 474-6300

By:

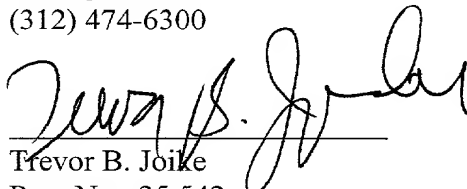
Trevor B. Joike
Reg. No.: 25,542

November 15, 2000